


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.25 lm/W			
MODEL	3000K	I _{max} (cd)	1423	S/MH(C0/180)	0.96
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.99
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	1672.2	η UP, DN(C0-180)	0.0, 51.1
NOMINAL FLUX(lm)	1672.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 48.9
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.05

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

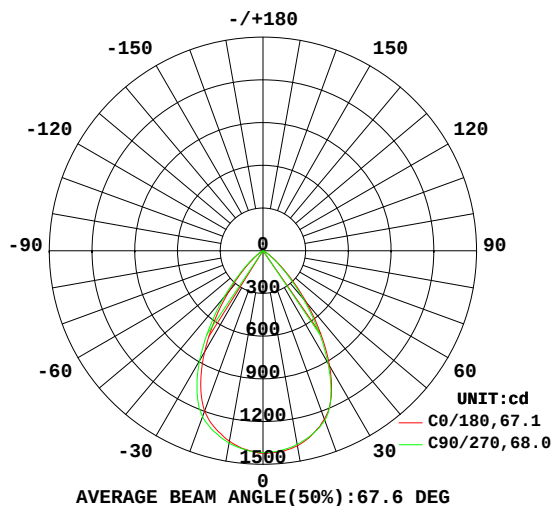

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

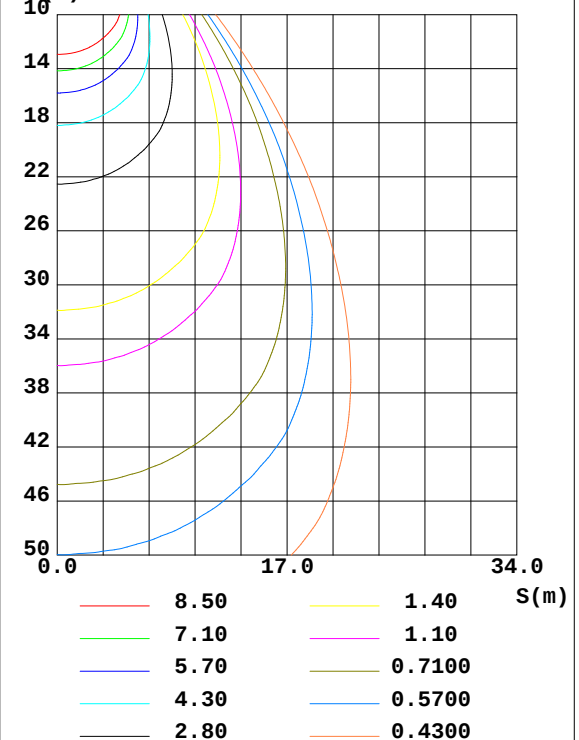

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1391	1385	1379	1368	1358	1357	1372	1379	0- 10	133.1	133.1	7.96, 7.96
20	1259	1262	1270	1253	1199	1198	1240	1270	10- 20	371.1	504.2	30.2, 30.2
30	935.7	926.5	914.9	886.1	819.7	826.3	890.1	943.4	20- 30	499.4	1004	60, 60
40	475.6	461.1	440.0	411.3	372.9	382.3	424.2	463.6	30- 40	406.4	1410	84.3, 84.3
50	147.8	142.4	132.1	120.0	99.71	100.6	120.4	139.3	40- 50	195.5	1605	96, 96
60	29.53	28.45	25.58	21.65	17.43	18.08	22.41	27.35	50- 60	55.30	1661	99.3, 99.3
70	3.756	3.385	2.608	1.862	1.343	1.616	2.250	2.963	60- 70	10.21	1671	99.9, 99.9
80	0.6027	0.5141	0.5141	0.4139	0.2309	0.3502	0.3966	0.4239	70- 80	0.9891	1672	100, 100
90	0.2085	0.2007	0.2046	0.2316	0.0540	0.0540	0.0463	0.0425	80- 90	0.2294	1672	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

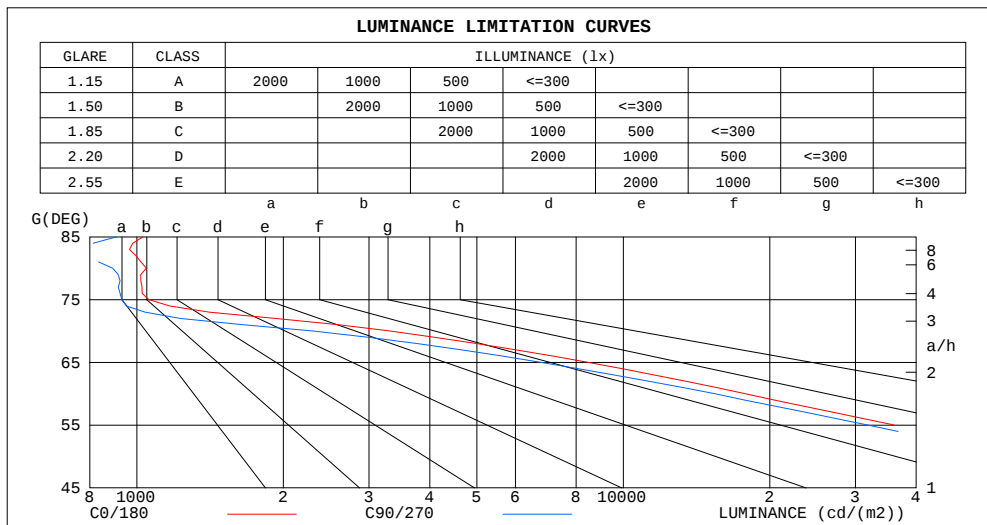

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1029	908
80	1045	892
75	1058	931
70	3308	2297
65	8454	6760
60	17791	15412
55	36057	31806
50	69275	61884
45	120223	108288


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	1.00	1.00	.99	.97	.97	.95	.94	.93
2.0	1.02	.97	.93	.90	.96	.92	.96	.93	.90	.93	.91	.88	.91	.89	.87	.85
3.0	.94	.88	.84	.92	.87	.83	.90	.85	.82	.87	.84	.81	.85	.82	.79	.78
4.0	.87	.81	.76	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.80	.74	.69	.79	.73	.69	.78	.72	.68	.76	.71	.68	.74	.70	.67	.66
6.0	.75	.68	.64	.74	.68	.63	.72	.67	.63	.71	.66	.62	.70	.65	.62	.60
7.0	.70	.63	.58	.69	.63	.58	.68	.62	.58	.66	.61	.58	.65	.61	.57	.56
8.0	.65	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.61	.57	.53	.52
9.0	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.58	.53	.50	.48
10.0	.57	.51	.47	.57	.51	.47	.56	.50	.47	.55	.50	.46	.54	.50	.46	.45

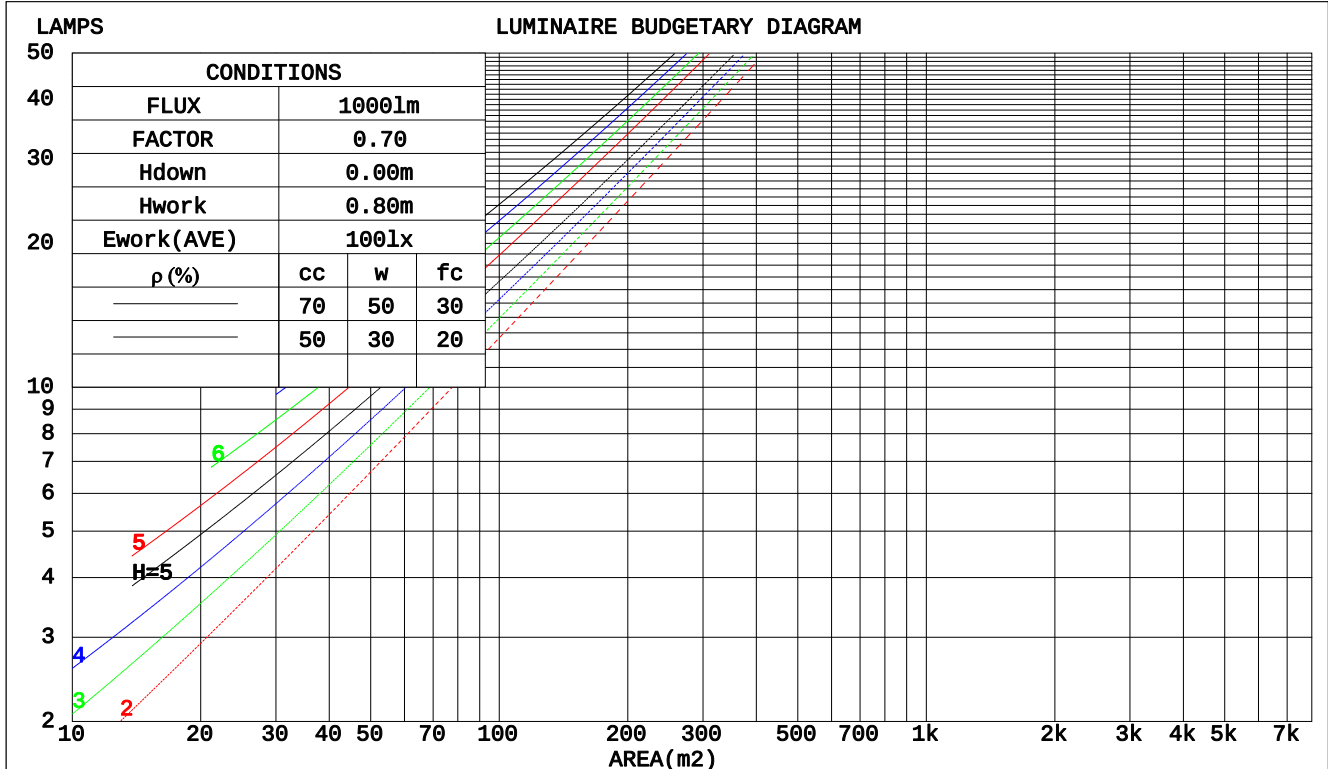

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm					
NAME: BJ20-BKC20C02			TYPE:		WEIGHT:
SPEC.: black RA90 3000K+5700K			DIM.:		SERIAL No.:
MFR.:			SUR.: 65mm		Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.191	.109	.034	.185	.105	.033	.172	.099	.031	.160	.092	.030	.150	.087	.028	
2.0	.186	.102	.031	.180	.099	.031	.169	.094	.029	.159	.089	.028	.150	.085	.027	
3.0	.178	.095	.028	.173	.093	.028	.164	.089	.027	.155	.085	.026	.147	.082	.025	
4.0	.170	.088	.026	.166	.087	.026	.158	.084	.025	.150	.081	.024	.143	.078	.024	
5.0	.162	.083	.024	.158	.081	.024	.151	.079	.023	.145	.076	.023	.139	.074	.022	
6.0	.155	.078	.022	.152	.077	.022	.145	.074	.022	.139	.072	.021	.134	.071	.021	
7.0	.148	.073	.021	.145	.072	.021	.139	.070	.020	.134	.069	.020	.129	.067	.020	
8.0	.141	.069	.019	.139	.068	.019	.134	.067	.019	.129	.065	.019	.125	.064	.019	
9.0	.135	.065	.018	.133	.065	.018	.128	.063	.018	.124	.062	.018	.120	.061	.018	
10.0	.129	.062	.017	.127	.061	.017	.123	.060	.017	.119	.059	.017	.116	.058	.017	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.147	.114	.087	.126	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.137	.099	.070	.118	.086	.061	.081	.060	.043	.047	.035	.025	.015	.011	.008	
5.0	.129	.088	.057	.111	.076	.050	.076	.053	.035	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.048	.105	.068	.041	.073	.048	.029	.042	.028	.017	.014	.009	.006	
7.0	.116	.071	.040	.100	.062	.035	.069	.043	.025	.040	.026	.015	.013	.008	.005	
8.0	.111	.065	.034	.095	.057	.030	.066	.040	.021	.038	.024	.013	.012	.008	.004	
9.0	.106	.060	.030	.091	.052	.026	.063	.037	.018	.037	.022	.011	.012	.007	.004	
10.0	.101	.056	.026	.087	.049	.023	.060	.034	.016	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm										
NAME: BJ20-BKC20C02					TYPE:			WEIGHT:		
SPEC.: black RA90 3000K+5700K					DIM.:			SERIAL No.:		
MFR.:					SUR.: 65mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	24.7	23.8	24.8	25.0	23.3	24.4	23.5	24.5	24.7
3H	23.4	24.4	23.7	24.6	24.8	23.1	24.1	23.4	24.3	24.5
4H	23.3	24.3	23.6	24.5	24.7	23.0	24.0	23.3	24.2	24.4
6H	23.3	24.1	23.6	24.3	24.6	23.0	23.8	23.3	24.0	24.3
8H	23.2	24.0	23.5	24.3	24.5	22.9	23.7	23.2	24.0	24.2
12H	23.2	23.9	23.5	24.2	24.5	22.9	23.6	23.2	23.9	24.2
4H 2H	23.4	24.3	23.7	24.5	24.7	23.1	24.0	23.4	24.2	24.5
3H	23.2	24.0	23.5	24.3	24.5	22.9	23.7	23.2	24.0	24.2
4H	23.1	23.8	23.5	24.1	24.4	22.8	23.5	23.2	23.8	24.1
6H	23.0	23.6	23.4	24.0	24.3	22.7	23.3	23.1	23.7	24.0
8H	23.0	23.5	23.4	23.9	24.3	22.7	23.2	23.1	23.6	24.0
12H	22.9	23.4	23.3	23.8	24.2	22.6	23.1	23.0	23.5	23.9
8H 4H	23.0	23.5	23.4	23.9	24.3	22.7	23.2	23.1	23.6	24.0
6H	22.9	23.3	23.3	23.7	24.2	22.6	23.0	23.0	23.4	23.9
8H	22.8	23.2	23.3	23.7	24.1	22.5	22.9	23.0	23.4	23.8
12H	22.8	23.1	23.2	23.6	24.0	22.5	22.8	22.9	23.3	23.7
12H 4H	22.9	23.4	23.3	23.8	24.2	22.6	23.1	23.0	23.5	23.9
6H	22.8	23.2	23.3	23.7	24.1	22.5	22.9	23.0	23.4	23.8
8H	22.8	23.1	23.2	23.6	24.0	22.5	22.8	22.9	23.3	23.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 7.9					+ 2.4 / - 8.4				
1.5H	+ 3.4 / - 5.7					+ 3.4 / - 5.6				
2.0H	+ 5.4 / - 8.9					+ 5.2 / - 9.0				

CIE Pub.117, 1672 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)
Area: 0.00332 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	74	70	81	74	70	80	73	69	65
0.80	90	83	79	89	83	79	88	82	78	74
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	95	91	99	94	90	97	93	89	85
1.50	104	98	94	102	97	94	100	96	93	88
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	101	107	103	100	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

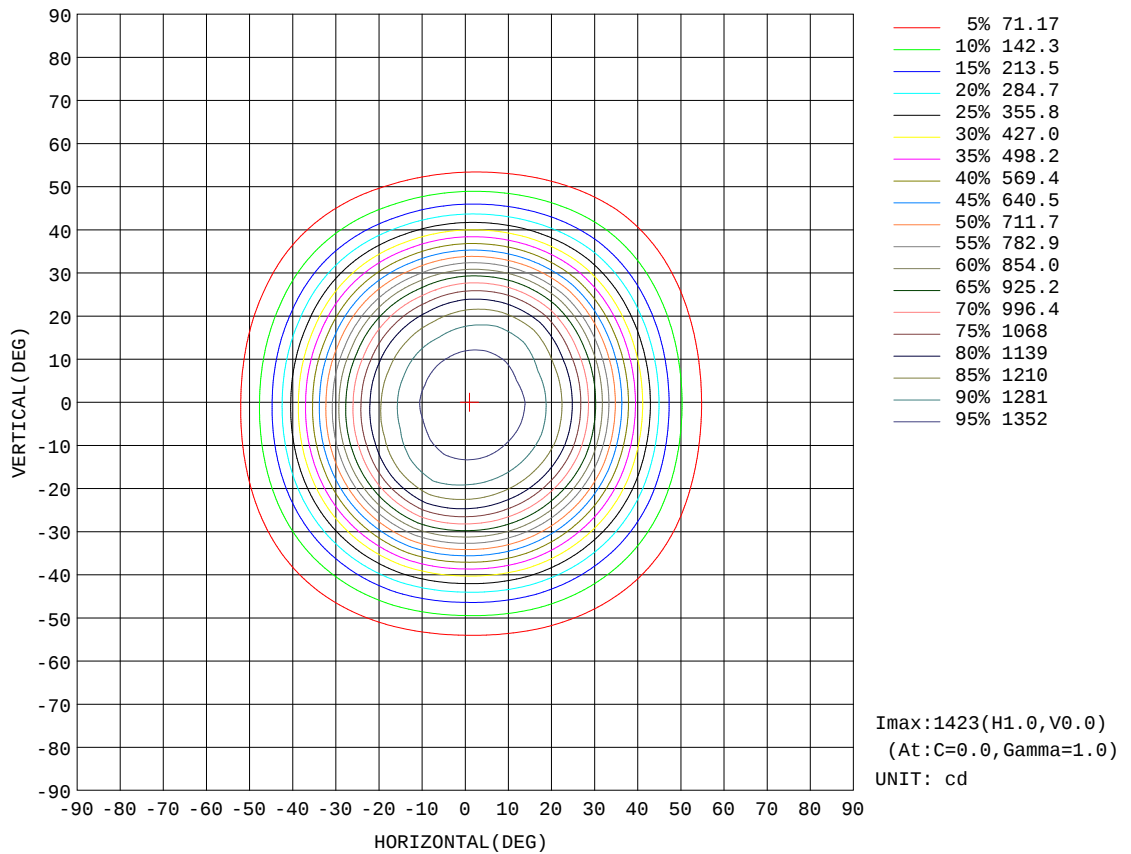


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

Flux out:1189 lm

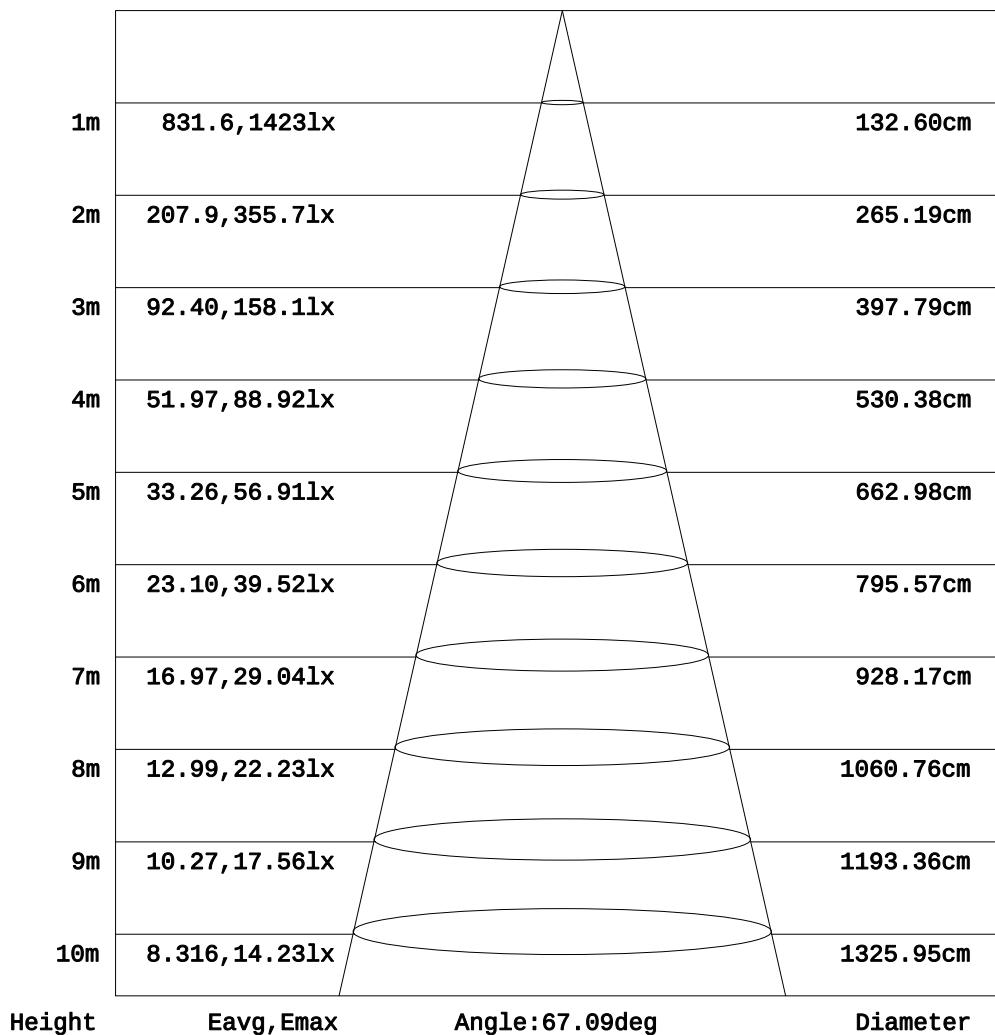


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

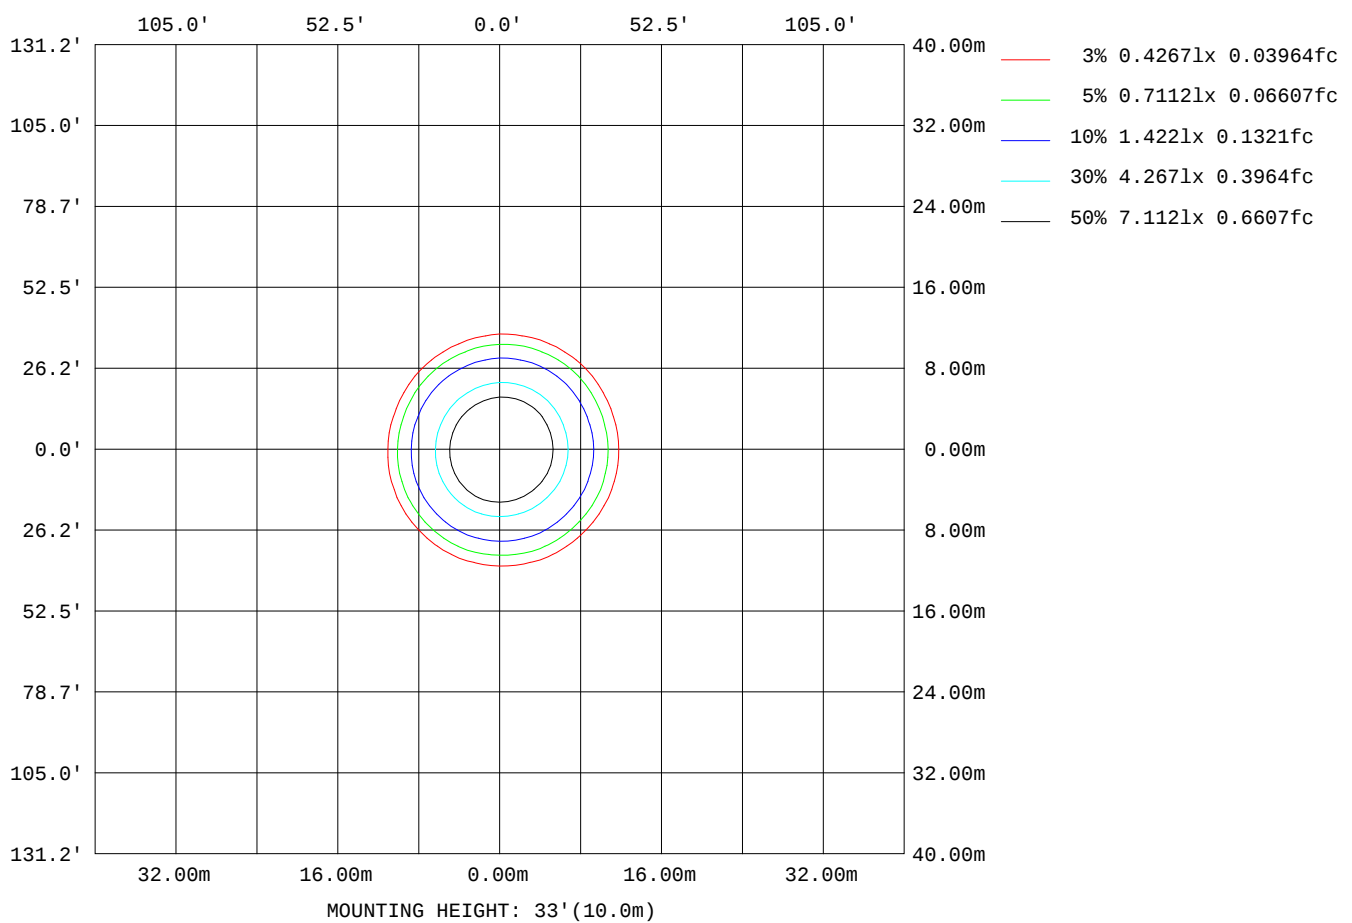

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.59V I:0.0891A P:18.948W PF:0.9226 Freq:49.99Hz Lamp Flux:1672.2x1 lm		
NAME: BJ20-BKC20C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6462
L_0~180(75)av	852
L_0~180(85)av	601
L_90~270(65)av	6378
L_90~270(75)av	885
L_90~270(85)av	647
L_45(65)av	6429
L_45(75)av	848
L_45(85)av	584

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

Planar Illuminance Curve

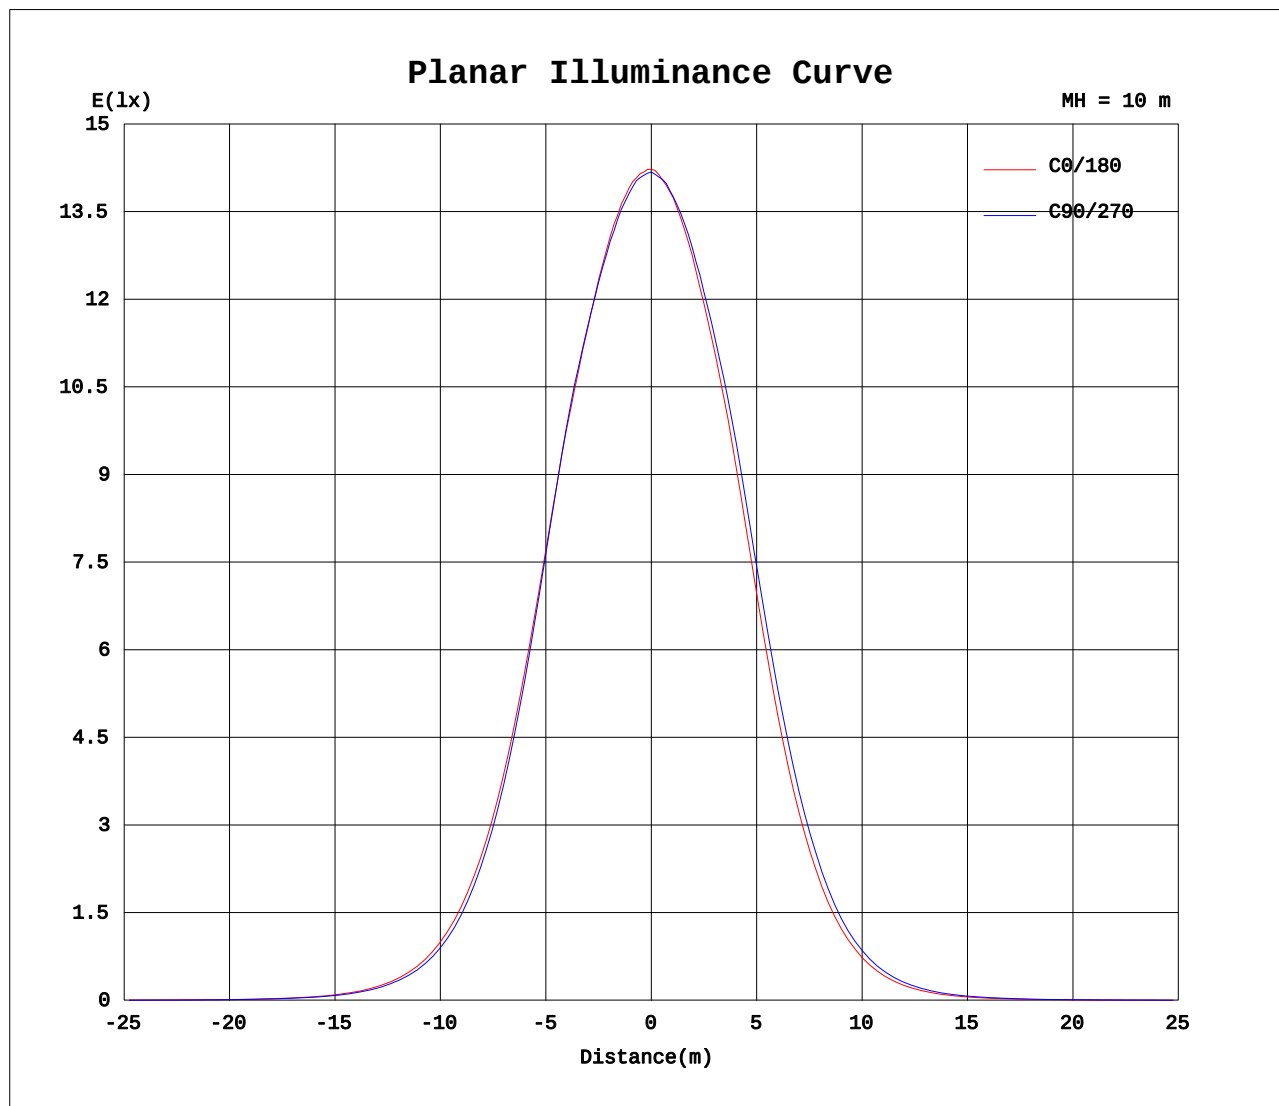

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-05-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

```