


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 74.89 lm/W			
MODEL	2835 72 3000K	I _{max} (cd)	1546	S/MH(C0/180)	1.25
NOMINAL POWER(W)	38	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2783.8	η UP, DN(C0-180)	0.5, 46.1
NOMINAL FLUX(lm)	2783.8	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3, 53.1
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.2	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

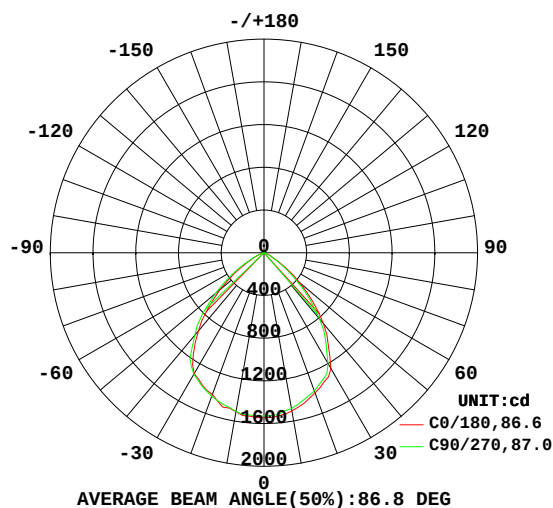

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

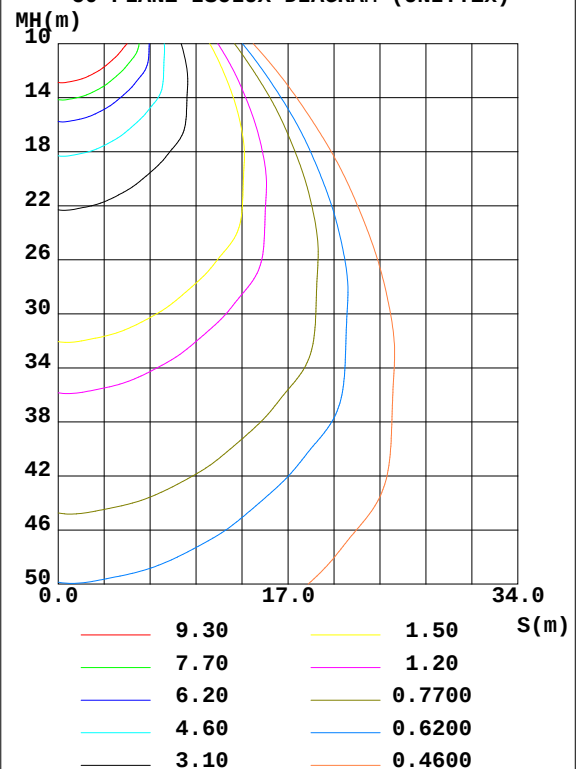

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1505	1482	1482	1487	1511	1532	1510	1502	0- 10	144.9	144.9	5.21, 5.21
20	1397	1388	1379	1395	1412	1431	1432	1409	10- 20	411.6	556.5	20, 20
30	1254	1210	1201	1234	1306	1316	1313	1273	20- 30	619.4	1176	42.2, 42.2
40	865.5	815.7	812.6	863.4	954.6	1001	1007	946.1	30- 40	683.7	1860	66.8, 66.8
50	434.3	388.4	387.1	445.6	541.5	595.9	594.0	518.1	40- 50	537.1	2397	86.1, 86.1
60	124.0	106.5	111.1	128.9	176.3	212.1	222.5	171.3	50- 60	273.0	2670	95.9, 95.9
70	23.01	15.75	15.71	24.11	39.30	49.70	48.48	36.82	60- 70	81.43	2751	98.8, 98.8
80	0.5996	0.5997	0.6069	0.6069	0.3801	0.4439	0.3983	0.4374	70- 80	10.21	2761	99.2, 99.2
90	0.8475	0.9804	0.9608	0.8963	0.3623	0.3217	0.3622	0.3619	80- 90	0.5798	2762	99.2, 99.2
100	1.655	1.847	1.845	1.730	0.8489	0.7563	0.8160	0.8915	90-100	1.025	2763	99.3, 99.3
110	2.715	2.929	2.934	2.809	1.610	1.491	1.558	1.670	100-110	1.838	2765	99.3, 99.3
120	3.841	4.048	4.089	3.953	2.575	2.507	2.615	2.628	110-120	2.712	2768	99.4, 99.4
130	4.905	5.094	5.099	5.046	3.573	3.629	3.613	3.633	120-130	3.409	2771	99.5, 99.5
140	5.801	5.964	6.064	5.986	4.516	4.350	4.487	4.551	130-140	3.684	2775	99.7, 99.7
150	6.408	6.654	6.777	6.753	5.291	5.165	5.306	5.377	140-150	3.512	2778	99.8, 99.8
160	7.000	7.265	7.399	7.400	6.220	6.035	6.282	6.287	150-160	2.920	2781	99.9, 99.9
170	7.523	7.806	7.845	8.010	7.064	6.909	7.101	7.172	160-170	2.005	2783	100, 100
180	7.652	7.838	7.882	8.069	7.666	7.838	7.882	8.061	170-180	0.7262	2784	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

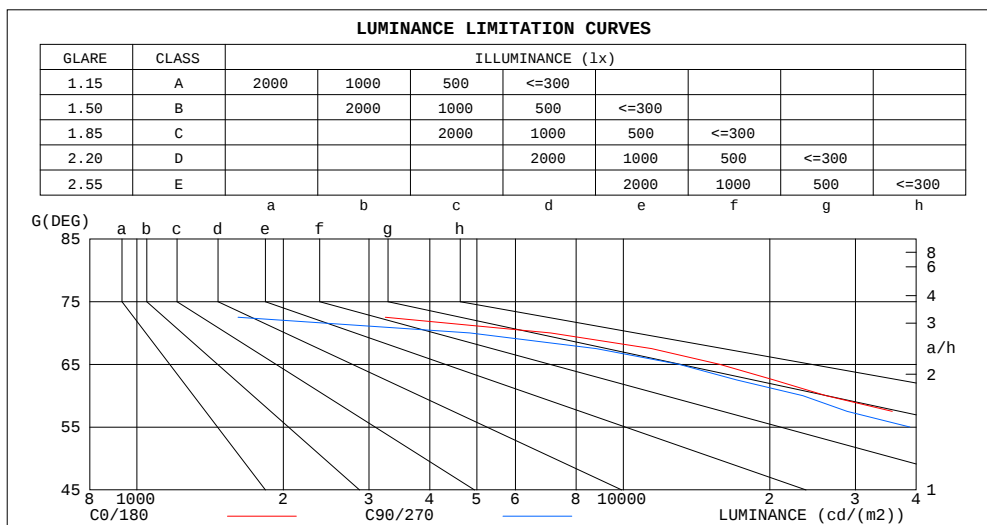

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	750	821
80	363	368
75	696	268
70	7083	4837
65	15772	13013
60	26097	23385
55	47168	38809
50	71129	63390
45	95899	88832


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.08	1.05	1.03	1.06	1.03	1.01	1.02	.99	.98	.98	.96	.94	.94	.93	.92	.90
2.0	.98	.93	.89	.96	.92	.88	.93	.89	.86	.90	.86	.84	.87	.84	.82	.80
3.0	.89	.83	.78	.87	.82	.77	.84	.80	.75	.82	.78	.74	.79	.76	.73	.71
4.0	.81	.74	.68	.79	.73	.68	.77	.71	.67	.75	.70	.66	.73	.69	.65	.63
5.0	.74	.66	.61	.72	.66	.60	.70	.64	.60	.69	.63	.59	.67	.62	.58	.57
6.0	.67	.60	.54	.66	.59	.54	.65	.58	.54	.63	.57	.53	.61	.57	.53	.51
7.0	.62	.54	.49	.61	.54	.49	.59	.53	.48	.58	.52	.48	.57	.52	.48	.46
8.0	.57	.49	.44	.56	.49	.44	.55	.49	.44	.54	.48	.44	.53	.47	.43	.42
9.0	.53	.45	.41	.52	.45	.40	.51	.45	.40	.50	.44	.40	.49	.44	.40	.38
10.0	.49	.42	.37	.48	.42	.37	.47	.41	.37	.46	.41	.37	.46	.40	.37	.35

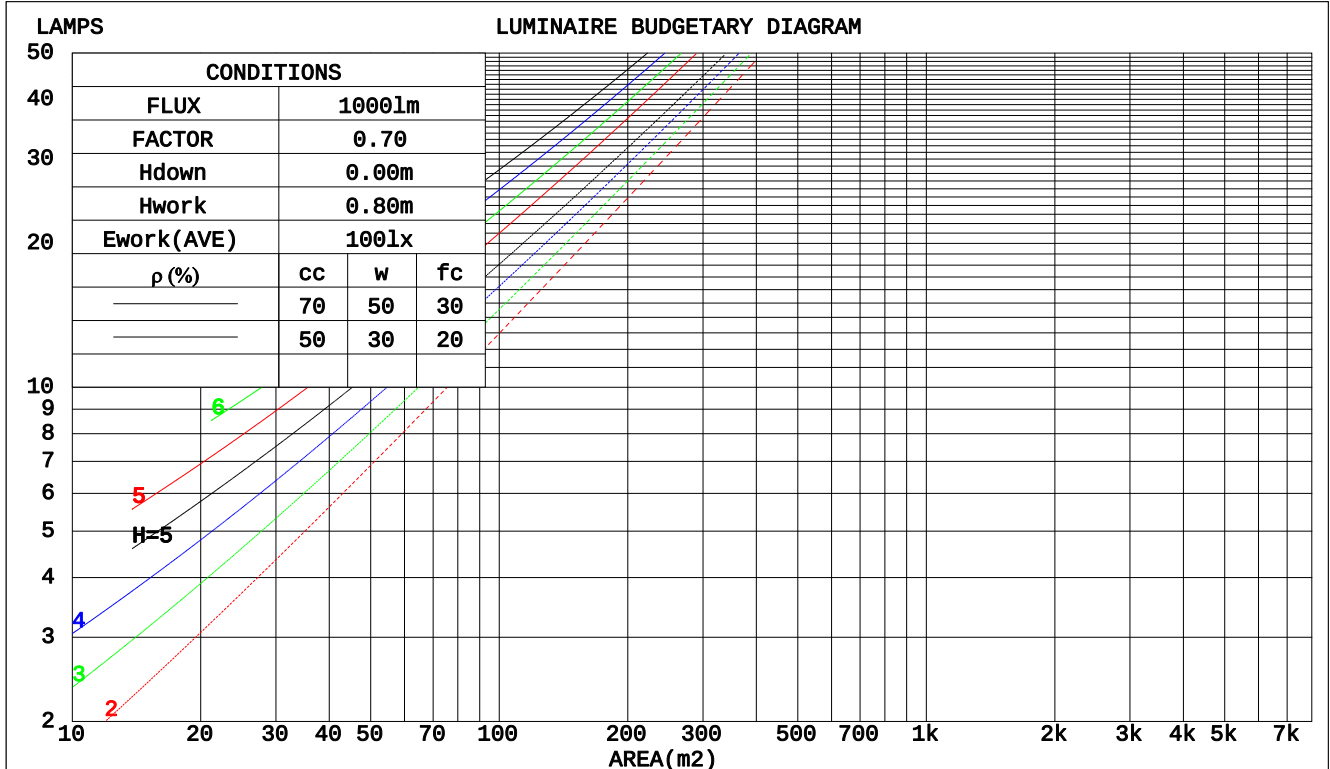

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm					
NAME: SFR006-BKTC3832S01			TYPE:		WEIGHT:
SPEC.: black RA80 3000K+5700K			DIM.:		SERIAL No.:
MFR.:			SUR.: 110mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.220	.125	.040	.213	.122	.039	.200	.115	.037	.188	.108	.035	.177	.102	.033	
2.0	.216	.119	.036	.210	.116	.036	.199	.111	.034	.188	.106	.033	.179	.101	.032	
3.0	.208	.111	.033	.202	.108	.033	.192	.104	.032	.183	.100	.031	.175	.097	.030	
4.0	.198	.103	.030	.193	.101	.030	.185	.098	.029	.176	.095	.029	.169	.092	.028	
5.0	.188	.096	.028	.184	.094	.027	.176	.092	.027	.169	.089	.026	.162	.087	.026	
6.0	.178	.089	.026	.175	.088	.025	.168	.086	.025	.161	.084	.025	.155	.082	.024	
7.0	.169	.084	.024	.166	.083	.024	.160	.081	.023	.154	.079	.023	.148	.077	.023	
8.0	.161	.078	.022	.158	.078	.022	.152	.076	.022	.147	.074	.021	.142	.073	.021	
9.0	.153	.074	.021	.150	.073	.020	.145	.072	.020	.140	.070	.020	.136	.069	.020	
10.0	.145	.070	.019	.143	.069	.019	.138	.068	.019	.134	.066	.019	.130	.065	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.180	.163	.147	.154	.140	.127	.105	.096	.088	.061	.056	.051	.019	.018	.017	
2.0	.168	.138	.113	.144	.119	.098	.099	.082	.068	.057	.048	.040	.018	.016	.013	
3.0	.159	.120	.089	.136	.103	.077	.093	.072	.054	.054	.042	.032	.017	.014	.010	
4.0	.150	.106	.072	.129	.092	.063	.089	.064	.044	.051	.037	.026	.017	.012	.009	
5.0	.143	.095	.060	.123	.082	.052	.085	.057	.037	.049	.034	.022	.016	.011	.007	
6.0	.136	.086	.050	.117	.075	.044	.081	.052	.031	.047	.031	.018	.015	.010	.006	
7.0	.130	.079	.043	.112	.069	.038	.077	.048	.027	.045	.028	.016	.015	.009	.005	
8.0	.125	.073	.038	.107	.064	.033	.074	.045	.024	.043	.026	.014	.014	.009	.005	
9.0	.120	.068	.034	.103	.059	.030	.071	.042	.021	.042	.025	.013	.013	.008	.004	
10.0	.115	.064	.031	.099	.056	.027	.069	.039	.019	.040	.023	.011	.013	.008	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm											
NAME: SFR006-BKTC3832S01					TYPE:			WEIGHT:			
SPEC.: black RA80 3000K+5700K					DIM.:			SERIAL No.:			
MFR.:					SUR.: 110mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.5	22.7	21.8	22.9	23.1	21.1	22.4	21.4	22.6	22.8	
	3H	21.4	22.5	21.7	22.8	23.0	21.0	22.1	21.3	22.4	22.6
	4H	21.3	22.4	21.6	22.6	22.9	20.9	22.0	21.2	22.2	22.5
	6H	21.2	22.2	21.5	22.5	22.7	20.8	21.8	21.1	22.1	22.3
	8H	21.2	22.1	21.5	22.4	22.7	20.8	21.7	21.1	22.0	22.3
	12H	21.1	22.0	21.5	22.3	22.6	20.7	21.6	21.1	21.9	22.2
4H	2H	21.4	22.4	21.7	22.7	22.9	21.0	22.1	21.3	22.3	22.6
	3H	21.3	22.2	21.6	22.5	22.8	20.9	21.8	21.2	22.1	22.4
	4H	21.2	22.0	21.5	22.3	22.6	20.8	21.6	21.1	21.9	22.2
	6H	21.1	21.8	21.5	22.1	22.5	20.7	21.4	21.1	21.8	22.1
	8H	21.0	21.7	21.4	22.0	22.4	20.6	21.3	21.0	21.7	22.1
	12H	21.0	21.6	21.4	22.0	22.4	20.6	21.2	21.0	21.6	22.0
8H	4H	21.0	21.7	21.4	22.0	22.4	20.6	21.3	21.0	21.7	22.1
	6H	20.9	21.5	21.4	21.9	22.3	20.5	21.1	21.0	21.5	21.9
	8H	20.9	21.3	21.3	21.8	22.2	20.5	21.0	21.0	21.4	21.9
	12H	20.8	21.2	21.3	21.7	22.2	20.5	20.9	20.9	21.3	21.8
12H	4H	21.0	21.6	21.4	22.0	22.4	20.6	21.2	21.0	21.6	22.0
	6H	20.9	21.3	21.3	21.8	22.2	20.5	21.0	21.0	21.4	21.9
	8H	20.8	21.2	21.3	21.7	22.2	20.5	20.9	20.9	21.3	21.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.8 / - 3.8					+ 1.9 / - 4.4					
1.5H	+ 1.4 / - 3.0					+ 1.6 / - 3.2					
2.0H	+ 4.0 / - 5.9					+ 4.0 / - 5.8					

CIE Pub.117, 2784 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.6)
Area: 0.0095 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	70	61	55	69	61	55	68	60	55	50
0.80	80	71	66	79	71	65	78	70	65	60
1.00	88	80	74	87	79	74	85	80	73	68
1.25	94	87	81	93	86	81	90	84	80	74
1.50	98	91	86	97	90	86	94	89	85	79
2.00	103	97	93	101	96	92	98	94	90	84
2.50	106	100	96	104	99	95	100	96	93	86
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	103	108	105	102	104	102	99	91
5.00	112	109	106	110	107	104	105	103	101	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

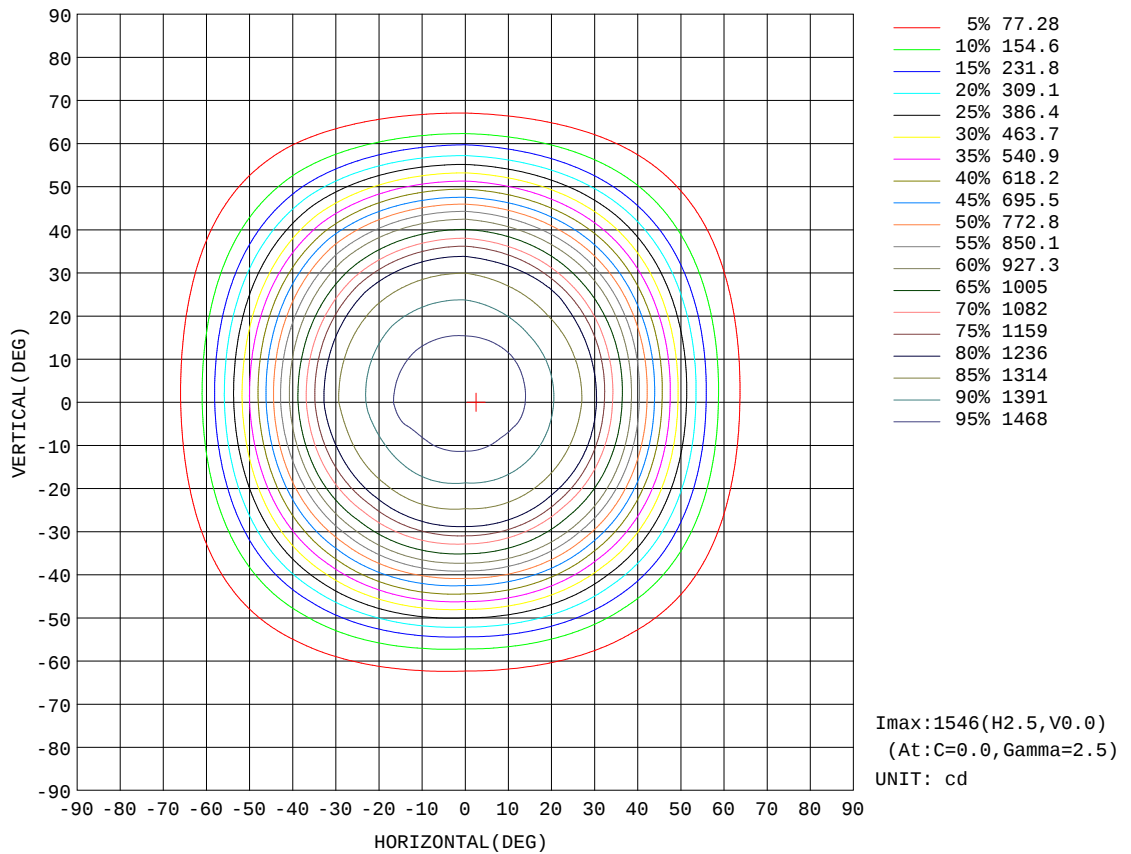


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

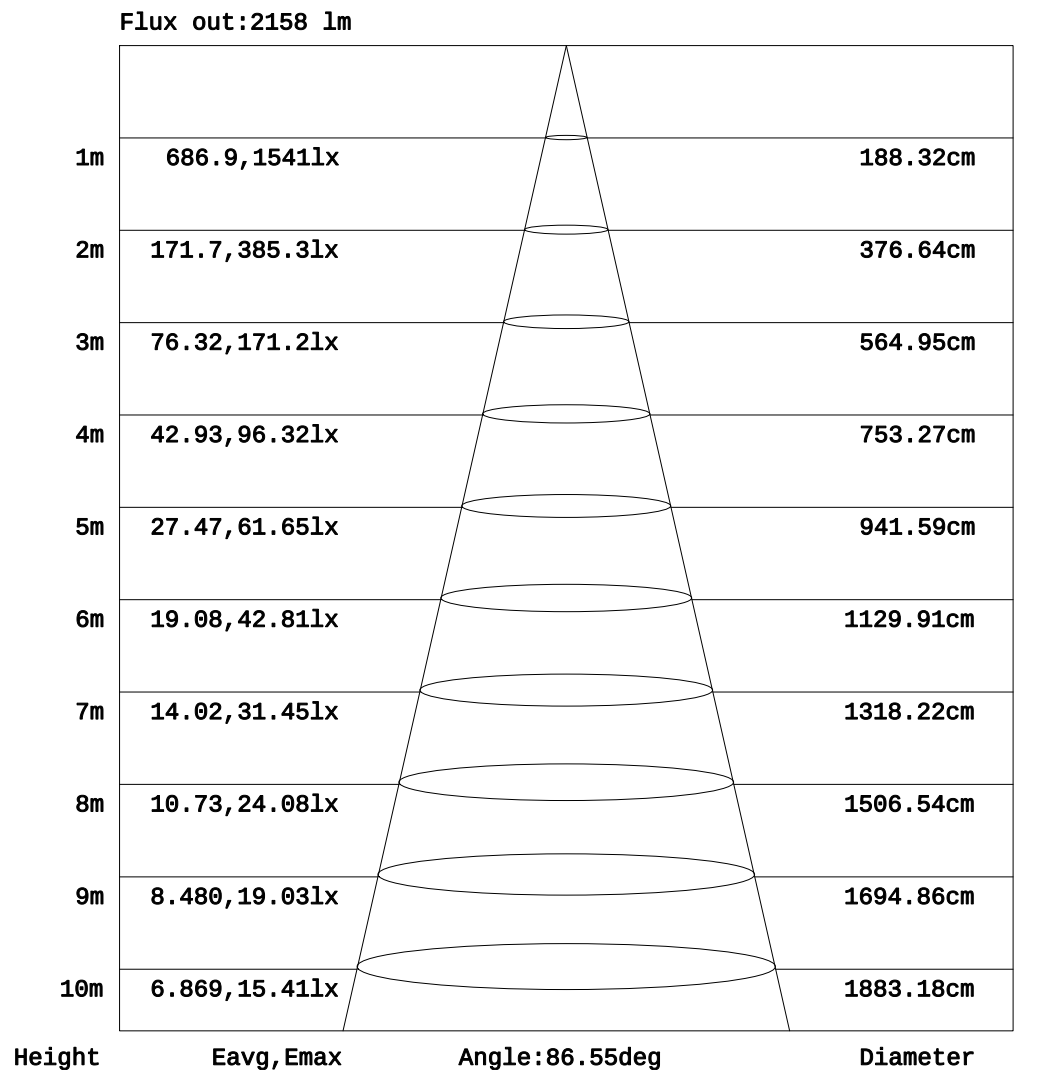


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

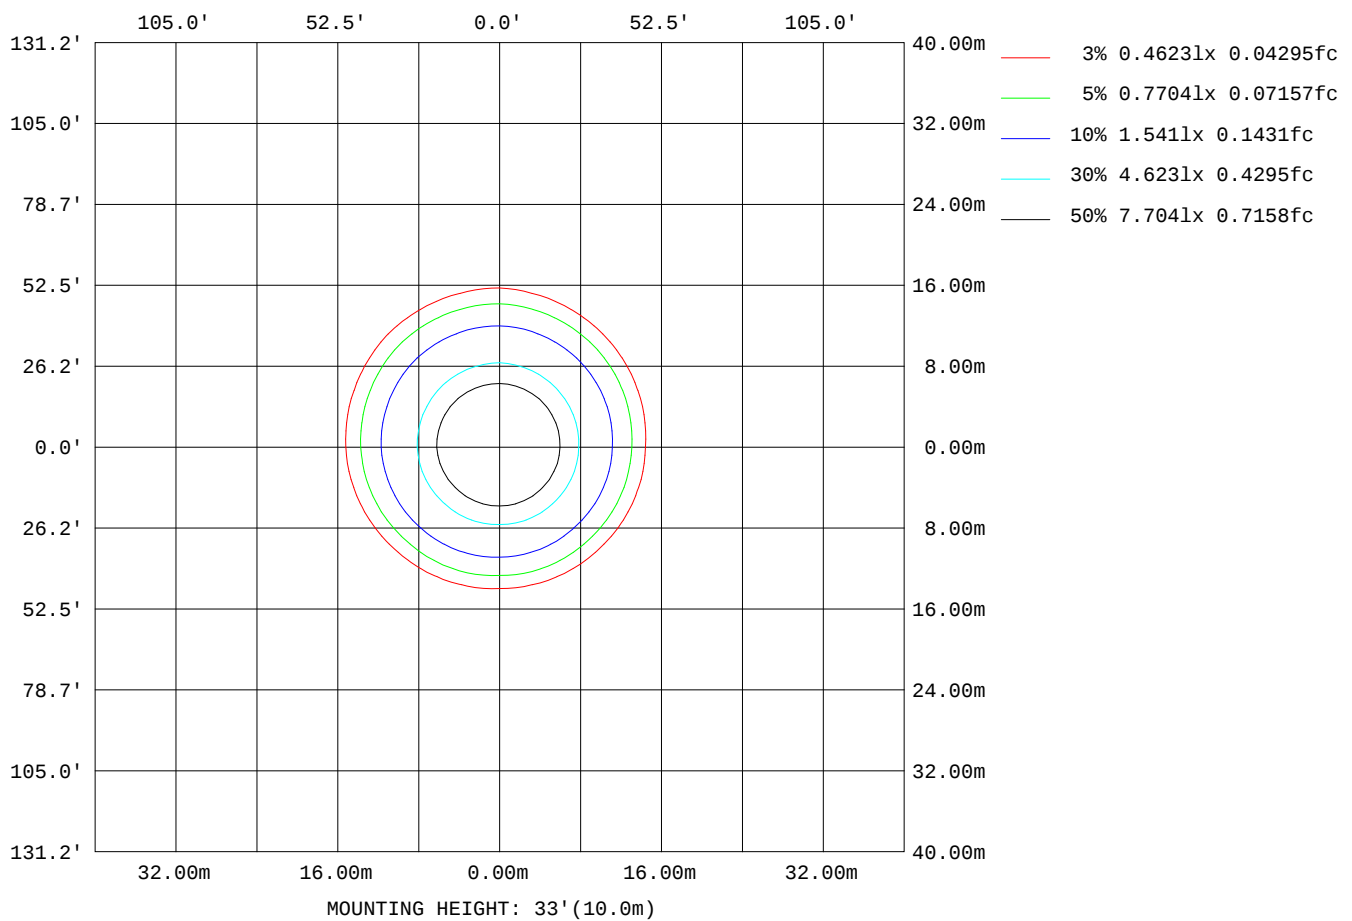

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	18791
L_0~180(75)av	1922
L_0~180(85)av	572
L_90~270(65)av	19282
L_90~270(75)av	2741
L_90~270(85)av	622
L_45(65)av	19395
L_45(75)av	2357
L_45(85)av	627

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

Planar Illuminance Curve

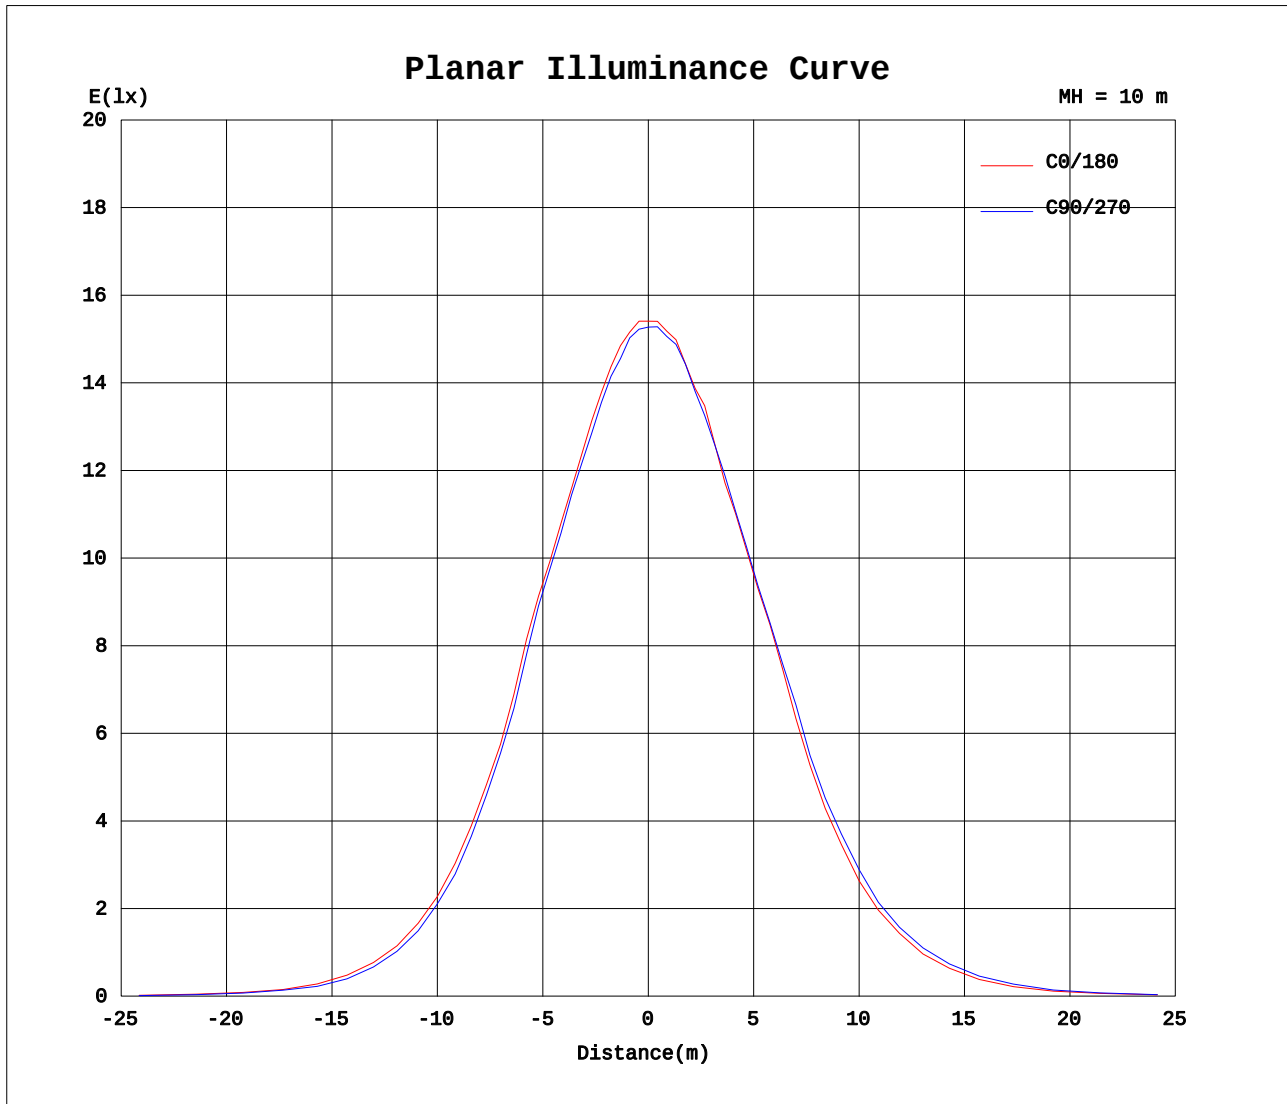

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2023-09-23

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.1722A P:37.170W PF:0.9795 Freq:50.01Hz Lamp Flux:2783.8x1 lm		
NAME: SFR006-BKTC3832S01	TYPE:	WEIGHT:
SPEC.: black RA80 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 110mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1541	1535	1528	1524	1541	1535	1528	1524										
5	1534	1530	1520	1518	1536	1521	1524	1516										
10	1505	1482	1482	1487	1511	1532	1510	1502										
15	1458	1456	1427	1433	1496	1480	1471	1470										
20	1397	1388	1379	1395	1412	1431	1432	1409										
25	1334	1321	1310	1333	1367	1382	1377	1352										
30	1254	1210	1201	1234	1306	1316	1313	1273										
35	1048	1006	1010	1048	1154	1207	1211	1122										
40	866	816	813	863	955	1001	1007	946										
45	644	591	597	654	745	819	818	730										
50	434	388	387	446	541	596	594	518										
55	257	225	211	260	339	394	391	326										
60	124	106	111	129	176	212	222	171										
65	63.3	51.9	52.2	65.3	87.6	111	103	83.4										
70	23.0	15.8	15.7	24.1	39.3	49.7	48.5	36.8										
75	1.71	0.60	0.66	2.17	7.74	13.3	12.8	7.12										
80	0.60	0.60	0.61	0.61	0.38	0.44	0.40	0.44										
85	0.62	0.71	0.68	0.67	0.33	0.34	0.35	0.36										
90	0.85	0.98	0.96	0.90	0.36	0.32	0.36	0.36										
95	1.19	1.36	1.36	1.26	0.57	0.49	0.54	0.58										
100	1.66	1.85	1.85	1.73	0.85	0.76	0.82	0.89										
105	2.16	2.38	2.38	2.25	1.20	1.09	1.15	1.25										
110	2.72	2.93	2.93	2.81	1.61	1.49	1.56	1.67										
115	3.27	3.48	3.49	3.38	2.07	1.97	2.07	2.14										
120	3.84	4.05	4.09	3.95	2.57	2.51	2.62	2.63										
125	4.38	4.60	4.60	4.52	3.08	3.07	3.13	3.14										
130	4.90	5.09	5.10	5.05	3.57	3.63	3.61	3.63										
135	5.38	5.55	5.60	5.53	4.06	3.90	4.04	4.12										
140	5.80	5.96	6.06	5.99	4.52	4.35	4.49	4.55										
145	6.12	6.34	6.44	6.40	4.93	4.78	4.94	4.97										
150	6.41	6.65	6.78	6.75	5.29	5.17	5.31	5.38										
155	6.69	6.92	7.06	7.06	5.72	5.54	5.75	5.78										
160	7.00	7.27	7.40	7.40	6.22	6.04	6.28	6.29										
165	7.35	7.62	7.71	7.76	6.67	6.50	6.71	6.76										
170	7.52	7.81	7.85	8.01	7.06	6.91	7.10	7.17										
175	7.63	7.88	7.88	8.12	7.44	7.42	7.54	7.66										
180	7.65	7.84	7.88	8.07	7.67	7.84	7.88	8.06										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2023-09-23

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks: