


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.52 lm/W			
MODEL	TB15111204 3000K	I _{max} (cd)	2452	S/MH(C0/180)	0.57
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	0.71
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	1045.9	η UP, DN(C0-180)	0.0, 41.2
NOMINAL FLUX(lm)	1045.88	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 58.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

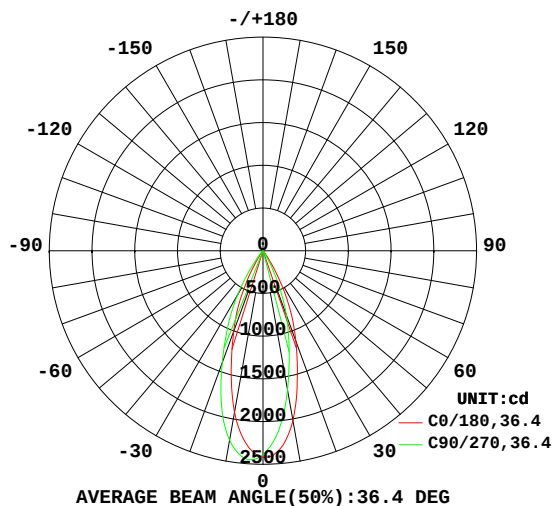

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

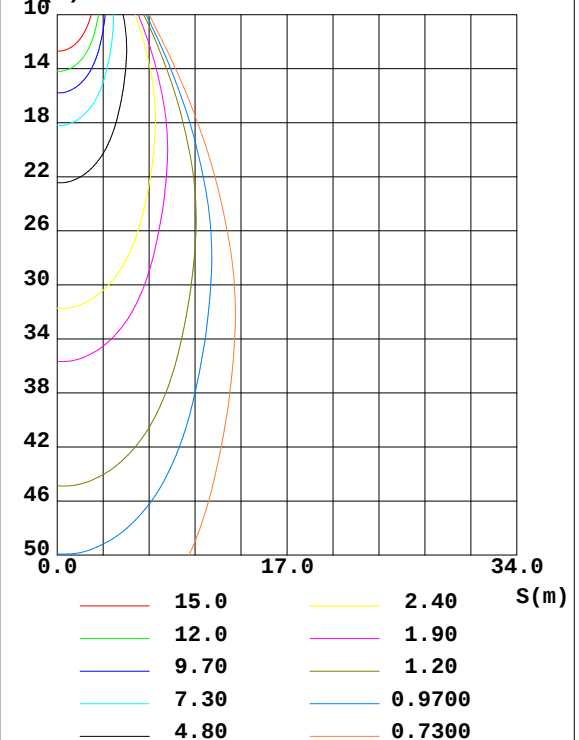

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2019	1778	1657	1705	1920	2143	2253	2180	0- 10	207.0	207.0	19.8,19.8
20	1124	909.5	801.3	845.4	1003	1250	1393	1303	10- 20	415.2	622.2	59.5,59.5
30	362.7	199.5	125.1	139.6	272.0	474.3	593.6	520.0	20- 30	310.6	932.8	89.2,89.2
40	37.04	21.88	19.15	20.02	26.90	45.76	66.19	56.52	30- 40	82.31	1015	97.1,97.1
50	13.34	11.53	10.73	11.06	12.74	14.74	16.64	15.29	40- 50	15.82	1031	98.6,98.6
60	7.198	5.591	5.027	5.367	6.676	8.420	9.435	8.671	50- 60	8.944	1040	99.4,99.4
70	2.729	1.926	1.574	1.879	2.533	3.393	3.883	3.490	60- 70	4.588	1044	99.9,99.9
80	0.2633	0.0700	0.0157	0.0352	0.0998	0.3578	0.8265	0.5457	70- 80	1.360	1046	100,100
90	0.0039	0.0039	0.0039	0.0077	0	0	0	0	80- 90	0.0642	1046	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

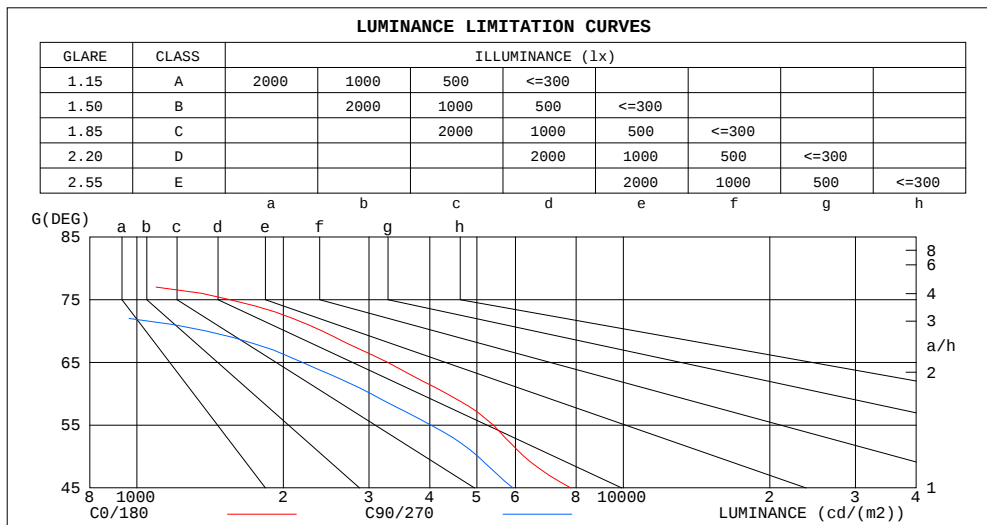

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	14	13
80	457	27
75	1549	325
70	2403	1386
65	3275	2187
60	4336	3028
55	5404	4020
50	6249	5027
45	7800	5932


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.96	.92	.98	.95	.91	.96	.93	.90	.94	.91	.89	.91	.89	.87	.86
4.0	.95	.90	.86	.94	.89	.86	.92	.88	.85	.90	.86	.84	.88	.85	.83	.82
5.0	.90	.85	.82	.89	.85	.81	.87	.84	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.80	.76	.82	.79	.76	.81	.78	.76	.74
7.0	.82	.77	.73	.81	.77	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71
8.0	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
10.0	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.67	.64	.70	.66	.64	.63

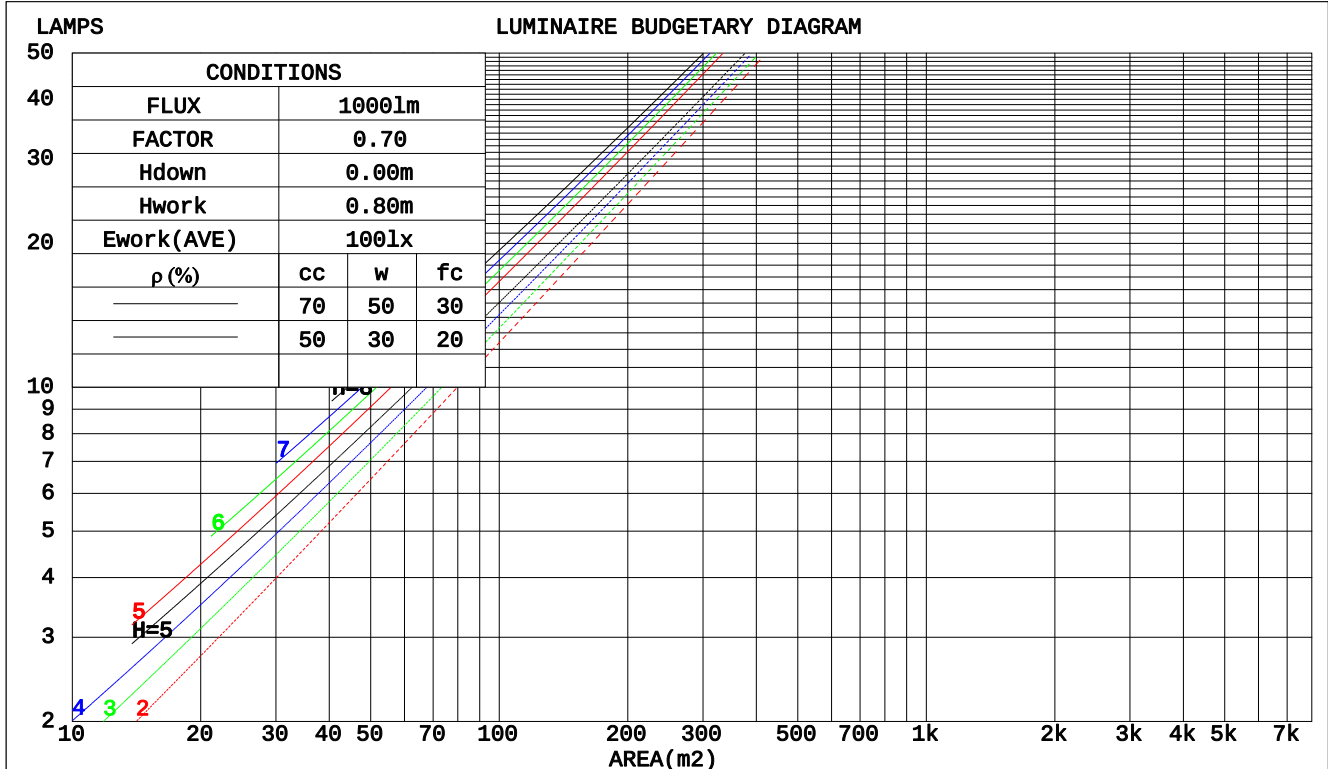

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm					
NAME: TH2035-BKTC18C02			TYPE:		WEIGHT:
SPEC.: black RA90 3000K+5700K			DIM.:		SERIAL No.:
MFR.:			SUR.: 65mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.157	.089	.028	.150	.086	.027	.137	.079	.025	.126	.073	.023	.115	.067	.022	
2.0	.148	.081	.025	.142	.078	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020	
3.0	.139	.074	.022	.135	.072	.022	.126	.068	.021	.118	.064	.020	.110	.061	.019	
4.0	.132	.068	.020	.128	.067	.020	.120	.064	.019	.113	.061	.018	.107	.058	.018	
5.0	.125	.064	.018	.122	.062	.018	.115	.060	.018	.109	.058	.017	.104	.055	.017	
6.0	.119	.060	.017	.116	.059	.017	.110	.057	.016	.105	.055	.016	.100	.053	.016	
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.097	.050	.015	
8.0	.109	.053	.015	.106	.052	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014	
9.0	.104	.050	.014	.102	.050	.014	.098	.049	.014	.095	.047	.014	.091	.046	.013	
10.0	.100	.048	.013	.098	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.075	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.118	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.033	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.097	.062	.039	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.046	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm											
NAME: TH2035-BKTC18C02						TYPE:			WEIGHT:		
SPEC.: black RA90 3000K+5700K						DIM.:			SERIAL No.:		
MFR.:						SUR.: 65mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		12.6	13.4	12.8	13.5	13.7	8.7	9.5	8.9	9.6	9.8
3H		12.6	13.3	12.8	13.5	13.7	8.8	9.5	9.0	9.7	9.9
4H		12.6	13.3	12.8	13.5	13.7	8.7	9.4	9.0	9.6	9.8
6H		12.5	13.1	12.8	13.4	13.6	8.6	9.3	8.9	9.5	9.8
8H		12.4	13.1	12.7	13.3	13.6	8.6	9.2	8.9	9.5	9.7
12H		12.4	13.0	12.7	13.3	13.5	8.5	9.1	8.9	9.4	9.7
4H	2H	12.4	13.1	12.7	13.3	13.6	8.8	9.5	9.0	9.7	9.9
	3H	12.5	13.1	12.8	13.4	13.6	8.9	9.5	9.2	9.8	10.1
	4H	12.4	13.0	12.8	13.3	13.6	8.8	9.4	9.2	9.7	10.0
	6H	12.4	12.8	12.7	13.2	13.5	8.7	9.2	9.1	9.6	9.9
	8H	12.3	12.8	12.7	13.1	13.5	8.7	9.1	9.1	9.5	9.9
	12H	12.3	12.7	12.7	13.0	13.4	8.6	9.0	9.0	9.4	9.8
8H	4H	12.3	12.8	12.7	13.1	13.5	8.7	9.2	9.1	9.5	9.9
	6H	12.2	12.6	12.6	13.0	13.4	8.6	9.0	9.0	9.4	9.8
	8H	12.2	12.5	12.6	12.9	13.3	8.6	8.9	9.0	9.3	9.8
	12H	12.1	12.4	12.6	12.8	13.3	8.5	8.8	9.0	9.2	9.7
12H	4H	12.3	12.7	12.7	13.0	13.4	8.7	9.1	9.1	9.5	9.8
	6H	12.2	12.5	12.6	12.9	13.3	8.6	8.9	9.0	9.3	9.8
	8H	12.1	12.4	12.6	12.8	13.3	8.5	8.8	9.0	9.2	9.7
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 3.2 / - 2.5					+ 1.2 / - 1.7				
1.5H		+ 4.9 / - 2.2					+ 1.5 / - 0.8				
2.0H		+ 2.0 / - 2.2					+ 1.6 / - 2.1				

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
Area: 0.00332 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

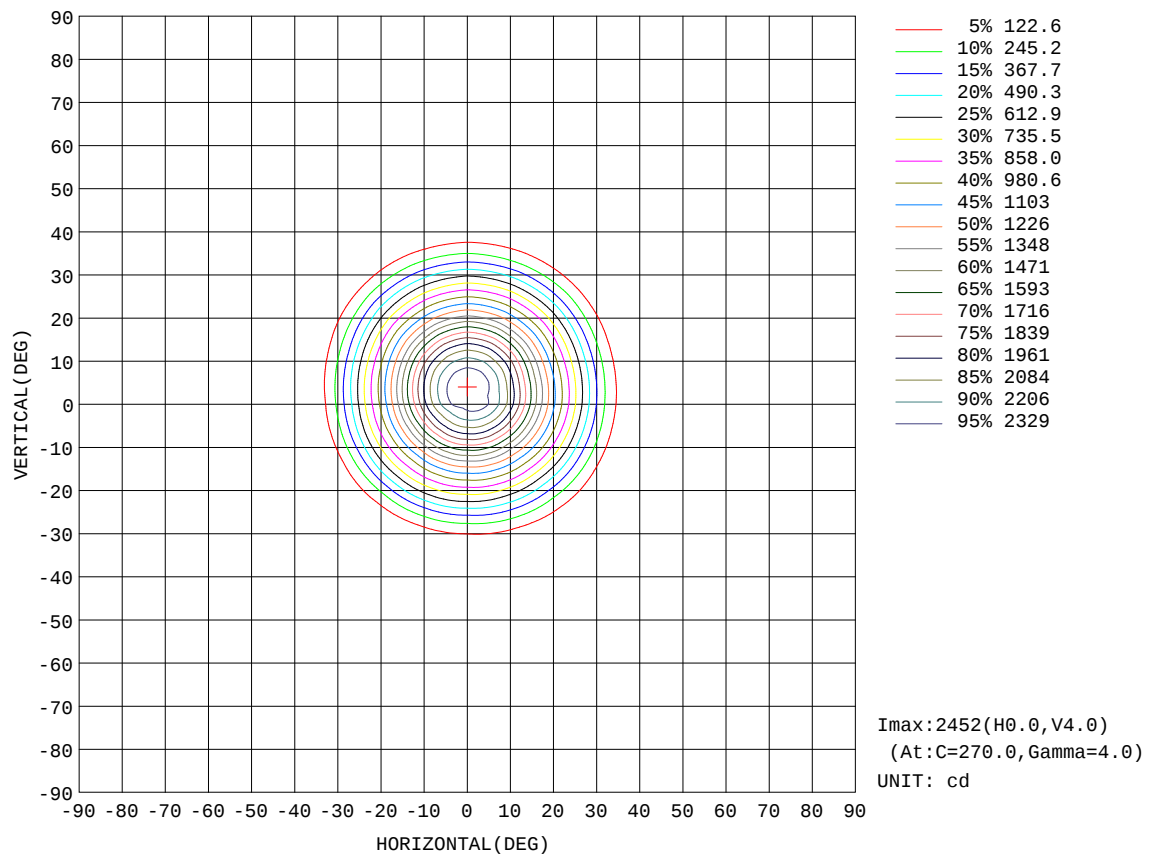


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

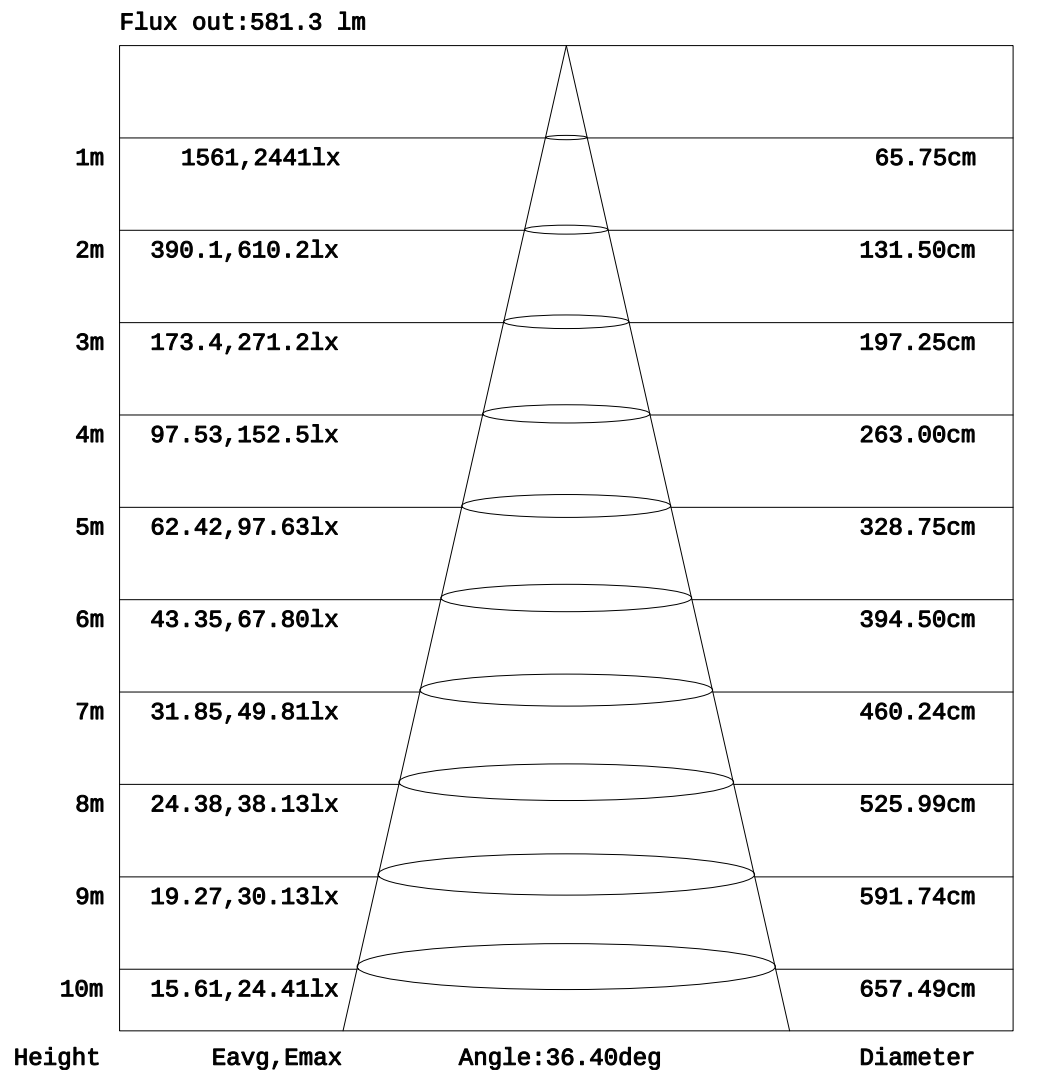


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:

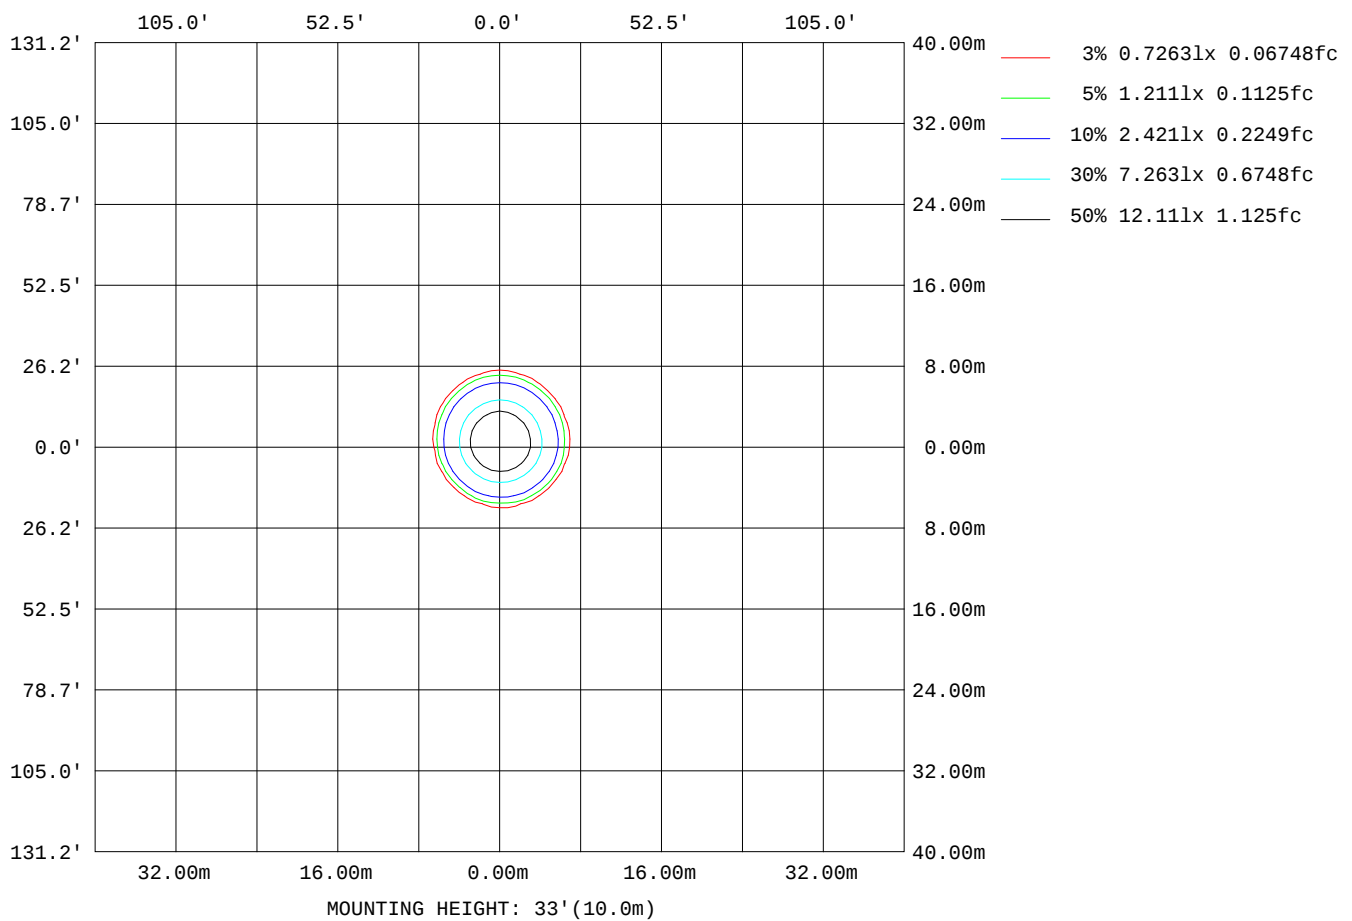

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.56V I:0.0732A P:15.723W PF:0.9739 Freq:50.01Hz Lamp Flux:1045.88x1 lm		
NAME: TH2035-BKTC18C02	TYPE:	WEIGHT:
SPEC.: black RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 65mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3164
L_0~180(75)av	1381
L_0~180(85)av	7
L_90~270(65)av	3334
L_90~270(75)av	1439
L_90~270(85)av	126
L_45(65)av	3217
L_45(75)av	1341
L_45(85)av	46

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

Planar Illuminance Curve

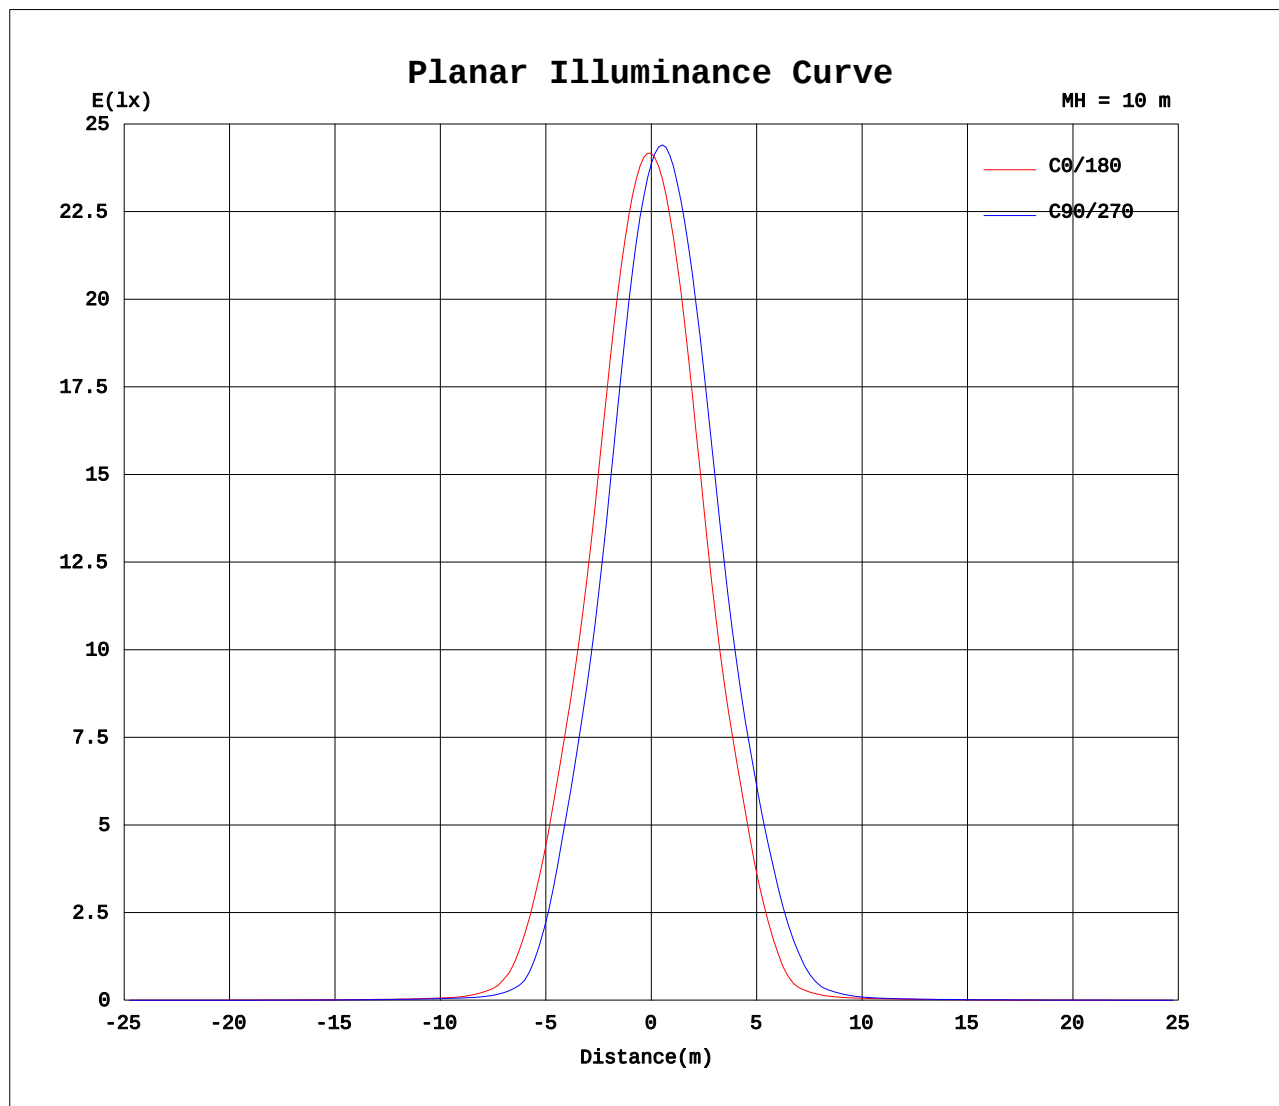

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

```