


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.69 lm/W			
MODEL	2835 64 4000K	I _{max} (cd)	1184	S/MH(C0/180)	1.27
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3479.7	η UP, DN(C0-180)	0.4, 49.6
NOMINAL FLUX(lm)	3479.74	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3, 49.7
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	99.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

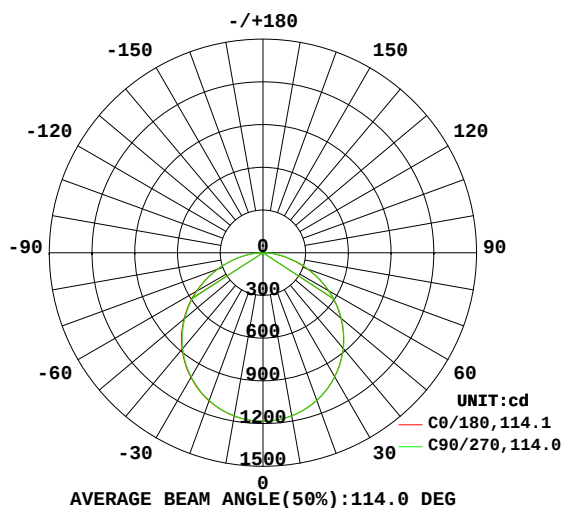

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

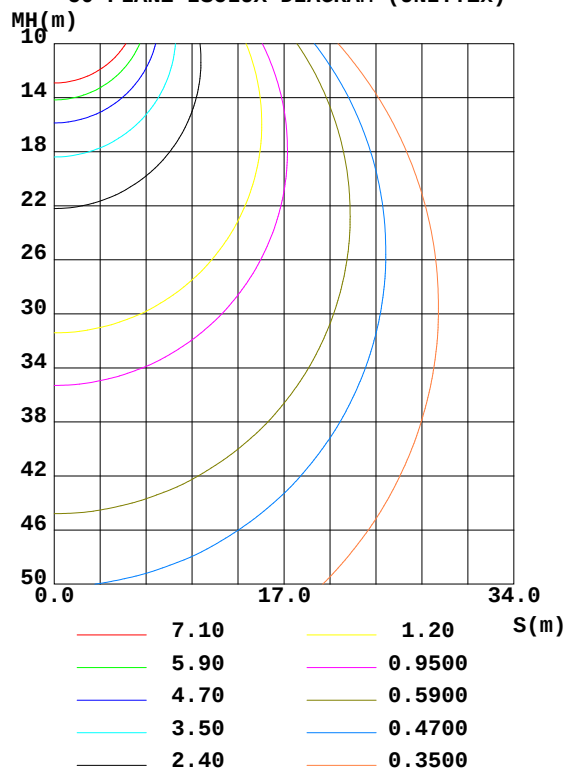

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1162	1164	1163	1162	1165	1163	1162	1164	0- 10	112.0	112.0	3.22, 3.22
20	1103	1107	1104	1103	1108	1102	1103	1107	10- 20	321.4	433.5	12.5, 12.5
30	1006	1012	1009	1005	1012	1005	1007	1012	20- 30	489.1	922.5	26.5, 26.5
40	876.0	883.1	878.4	875.0	884.6	874.0	876.6	883.3	30- 40	592.9	1515	43.6, 43.6
50	715.3	724.1	719.0	716.0	724.7	713.3	716.0	724.5	40- 50	618.8	2134	61.3, 61.3
60	529.8	540.4	536.6	531.1	540.4	527.9	532.1	540.9	50- 60	562.4	2697	77.5, 77.5
70	331.1	343.0	341.9	333.5	341.0	329.6	336.3	342.6	60- 70	432.0	3129	89.9, 89.9
80	140.5	152.4	153.3	144.8	150.0	139.9	147.4	151.1	70- 80	253.9	3383	97.2, 97.2
90	2.490	4.622	5.939	3.992	3.407	1.518	3.377	5.408	80- 90	74.24	3457	99.3, 99.3
100	2.843	2.761	2.635	2.768	1.843	1.707	1.649	1.736	90-100	2.358	3459	99.4, 99.4
110	3.498	3.426	3.337	3.441	2.410	2.284	2.260	2.325	100-110	2.703	3462	99.5, 99.5
120	4.116	4.084	4.028	4.073	2.976	2.826	2.834	2.855	110-120	3.147	3465	99.6, 99.6
130	4.694	4.698	4.653	4.684	3.529	3.465	3.390	3.454	120-130	3.379	3468	99.7, 99.7
140	5.143	5.250	5.216	5.254	4.180	4.145	4.030	4.065	130-140	3.375	3472	99.8, 99.8
150	5.557	5.715	5.677	5.751	4.892	4.935	4.823	4.789	140-150	3.116	3475	99.9, 99.9
160	5.937	6.109	6.145	6.128	5.451	5.589	5.525	5.374	150-160	2.552	3477	99.9, 99.9
170	6.149	6.325	6.427	6.244	5.901	6.021	6.142	5.827	160-170	1.684	3479	100, 100
180	6.157	6.292	6.442	6.127	6.135	6.274	6.427	6.124	170-180	0.5907	3480	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

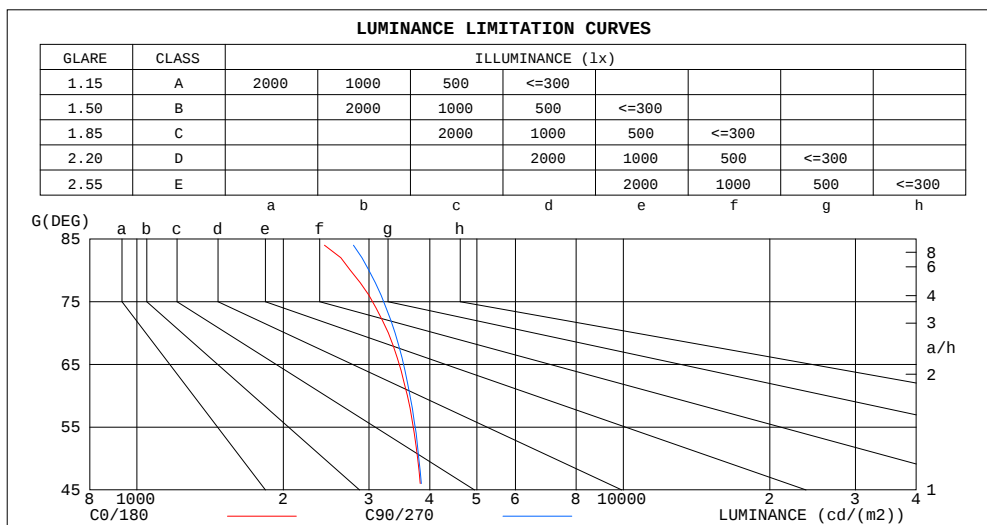


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.37	.30	.25	.36	.30	.25	.24

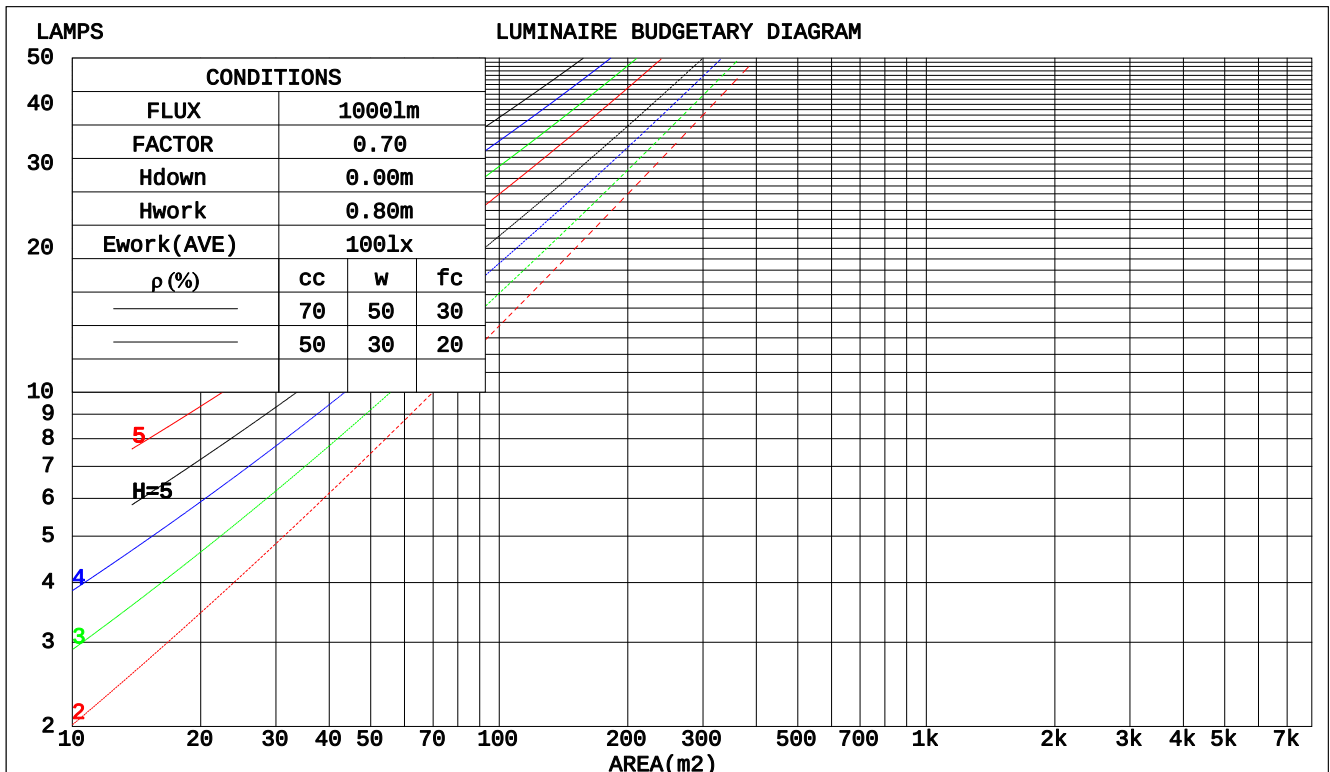

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm					
NAME: LPB new 40w 1200x300 WH TC			TYPE:		WEIGHT:
SPEC.: 40W			DIM.:		SERIAL No.:
MFR.:			SUR.: 1155*255mm		Shielding Angle:

ρ _{CC}	80%			70%			50%			30%			10%			0			
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0			
ρ _{fc}	20%			20%			20%			20%			20%			0			
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)												
0.0																			
1.0	.315	.179	.057	.307	.175	.056	.294	.169	.054	.281	.162	.052	.270	.156	.050				
2.0	.295	.162	.050	.289	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045				
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041				
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.219	.119	.036				
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033				
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030				
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027				
8.0	.186	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.166	.085	.025				
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023				
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021				

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.161	.139	.159	.138	.120	.109	.095	.083	.063	.055	.048	.020	.018	.016	
2.0	.178	.137	.103	.152	.118	.089	.104	.082	.062	.060	.047	.036	.019	.015	.012	
3.0	.170	.119	.079	.146	.103	.069	.100	.072	.048	.058	.042	.028	.019	.014	.009	
4.0	.162	.106	.063	.139	.092	.055	.096	.064	.039	.055	.037	.023	.018	.012	.008	
5.0	.155	.096	.052	.133	.083	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.148	.087	.044	.127	.076	.038	.088	.053	.027	.051	.031	.016	.016	.010	.005	
7.0	.141	.081	.038	.121	.070	.033	.084	.049	.024	.049	.029	.014	.016	.009	.005	
8.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
9.0	.128	.070	.030	.111	.061	.026	.077	.043	.019	.045	.025	.011	.014	.008	.004	
10.0	.123	.066	.028	.106	.057	.024	.073	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm											
NAME: LPB new 40w 1200x300 WH TC						TYPE:			WEIGHT:		
SPEC.: 40W						DIM.:			SERIAL No.:		
MFR.:						SUR.: 1155*255mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		13.1	14.6	13.4	14.8	15.0	13.1	14.7	13.4	14.9	15.1
	3H	14.6	16.0	14.9	16.3	16.5	14.7	16.1	15.0	16.4	16.6
	4H	15.2	16.6	15.5	16.8	17.1	15.3	16.7	15.7	16.9	17.2
	6H	15.7	16.9	16.0	17.2	17.5	15.8	17.1	16.2	17.4	17.7
	8H	15.8	17.0	16.1	17.3	17.6	16.0	17.2	16.3	17.5	17.8
	12H	15.9	17.0	16.2	17.3	17.7	16.1	17.3	16.5	17.6	17.9
4H	2H	13.7	15.1	14.0	15.3	15.6	13.8	15.1	14.1	15.4	15.6
	3H	15.4	16.6	15.8	16.9	17.2	15.5	16.7	15.9	17.0	17.3
	4H	16.2	17.2	16.6	17.6	17.9	16.3	17.4	16.7	17.7	18.0
	6H	16.7	17.7	17.1	18.1	18.4	16.9	17.9	17.3	18.2	18.6
	8H	16.9	17.8	17.4	18.2	18.6	17.1	18.0	17.5	18.4	18.8
	12H	17.1	17.9	17.5	18.3	18.7	17.3	18.1	17.7	18.5	18.9
8H	4H	16.5	17.4	16.9	17.7	18.1	16.6	17.5	17.0	17.8	18.2
	6H	17.2	17.9	17.6	18.4	18.8	17.3	18.1	17.8	18.5	18.9
	8H	17.5	18.1	17.9	18.6	19.0	17.7	18.3	18.1	18.8	19.2
	12H	17.7	18.2	18.2	18.7	19.2	17.9	18.5	18.4	18.9	19.4
12H	4H	16.5	17.3	16.9	17.7	18.1	16.6	17.4	17.0	17.8	18.2
	6H	17.3	17.9	17.7	18.4	18.8	17.4	18.1	17.9	18.5	19.0
	8H	17.6	18.2	18.1	18.6	19.1	17.8	18.3	18.3	18.8	19.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 3480 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.3)
Area: 0.294525 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	77	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

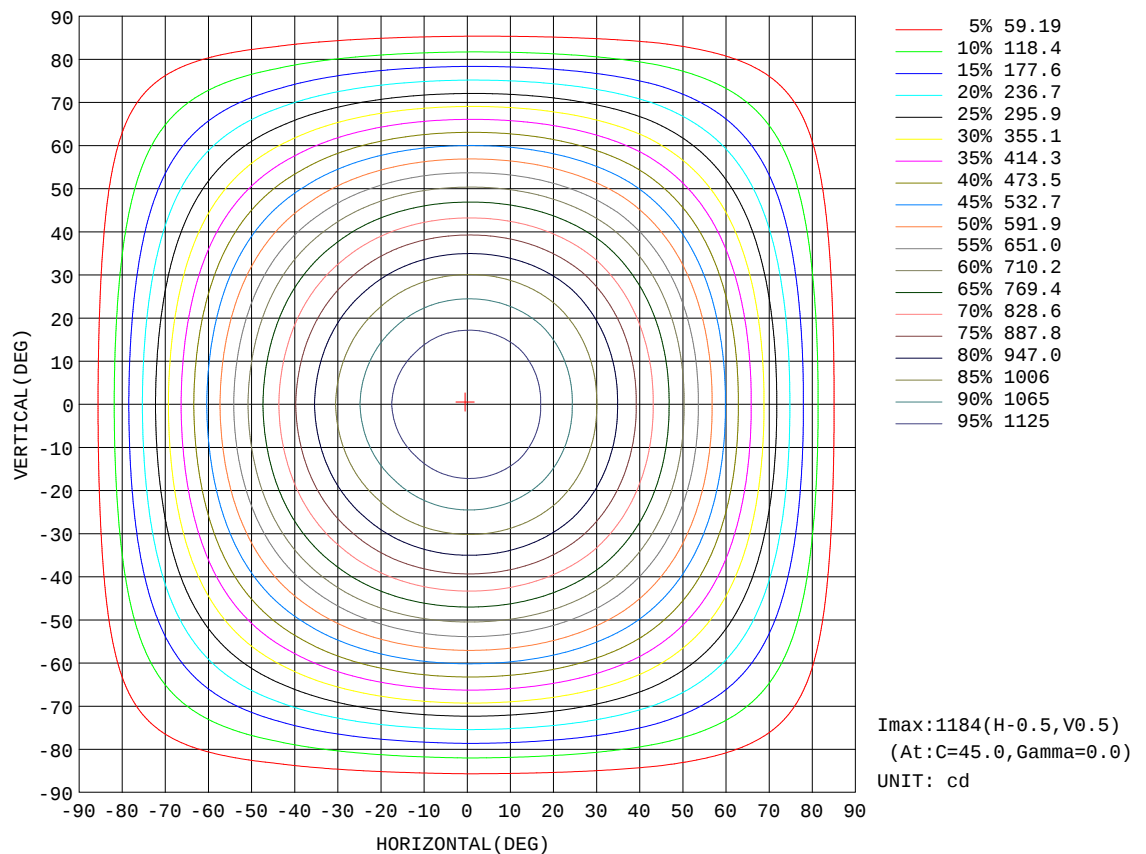


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

Flux out:2592 lm

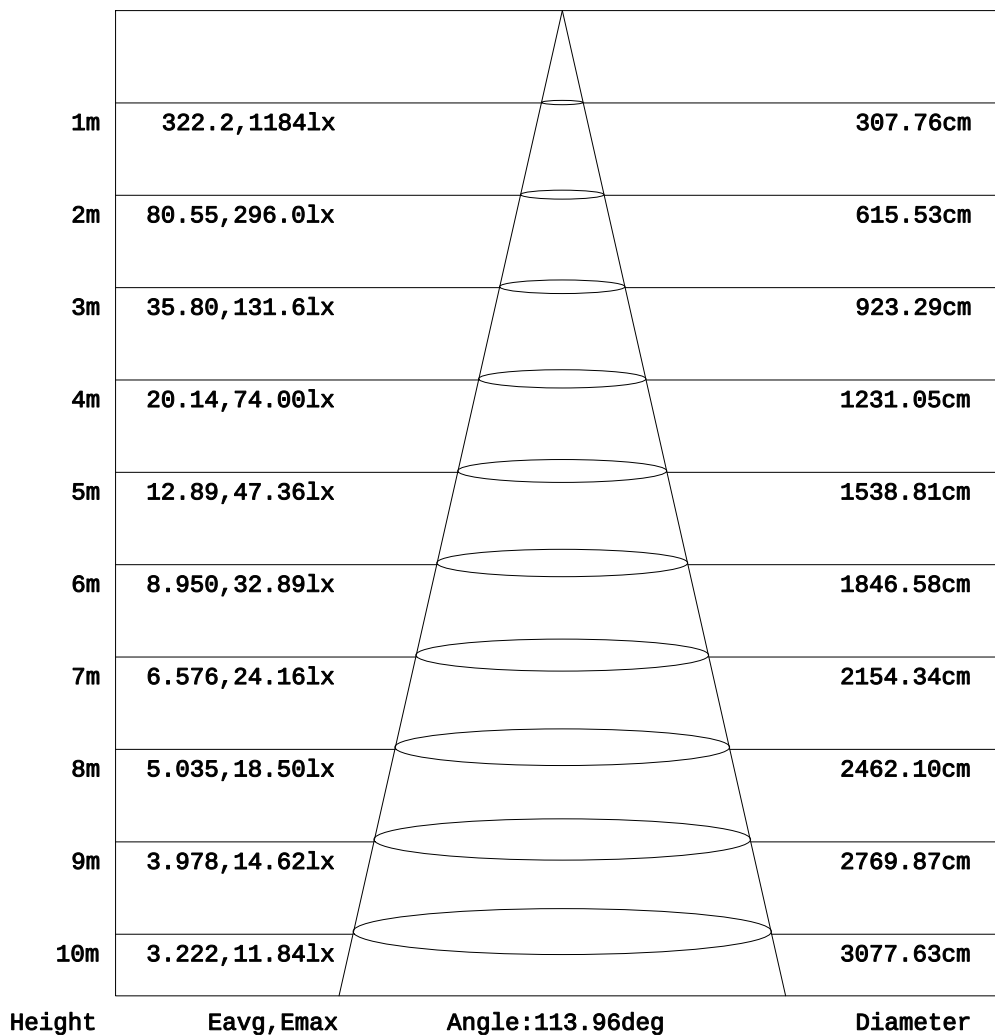


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

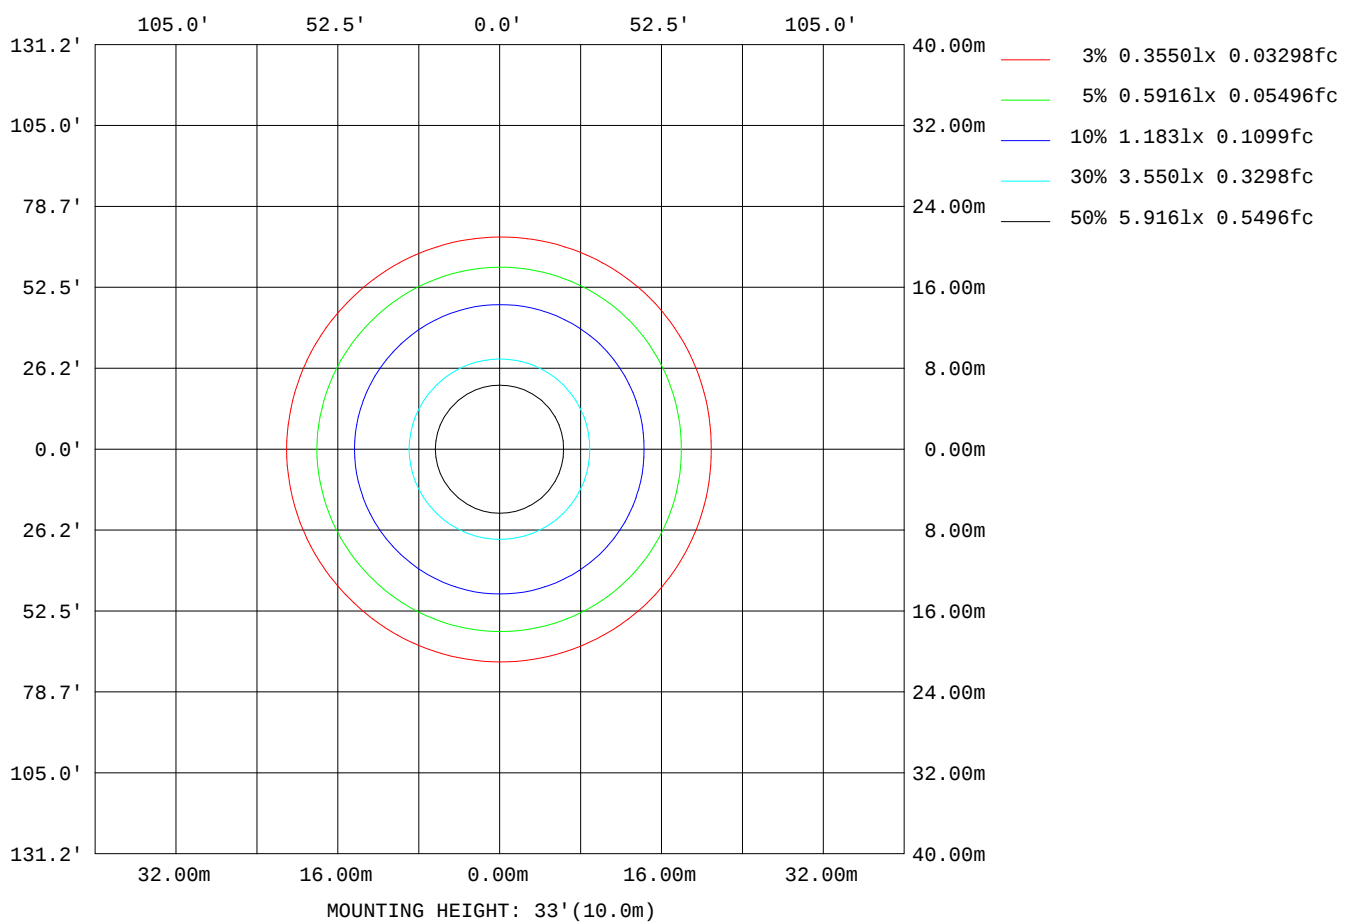

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3505
L_0~180(75)av	3118
L_0~180(85)av	2485
L_90~270(65)av	3514
L_90~270(75)av	3180
L_90~270(85)av	2607
L_45(65)av	3510
L_45(75)av	3144
L_45(85)av	2486

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

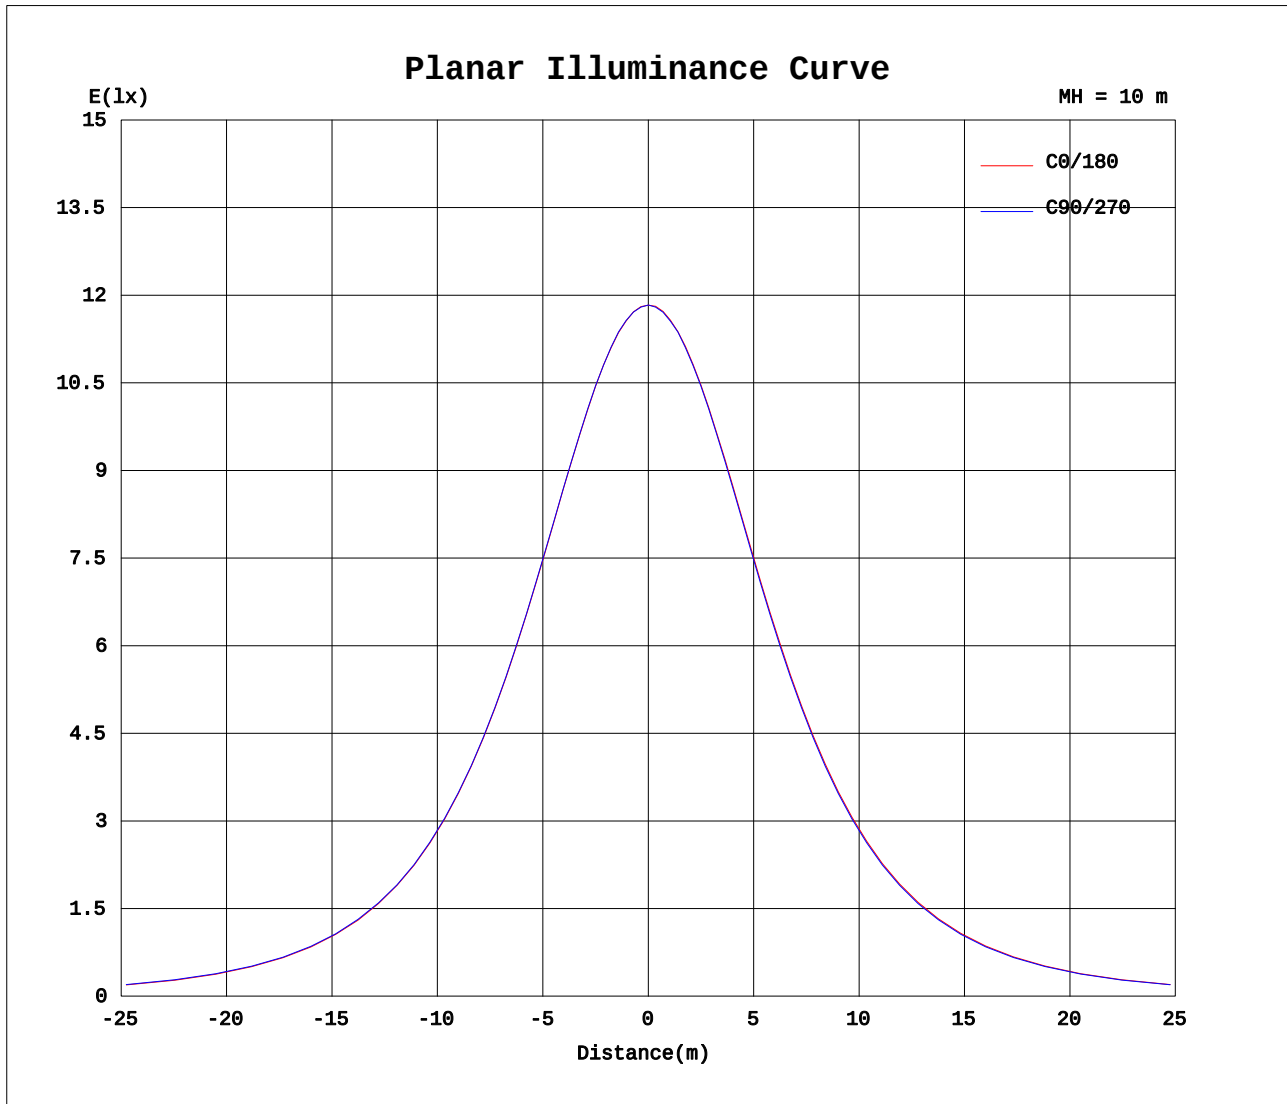

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.78V I:0.1602A P:33.886W PF:0.9581 Freq:50.01Hz Lamp Flux:3479.74x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1183	1184	1183	1182	1183	1184	1183	1182										
5	1180	1181	1180	1179	1181	1180	1180	1181										
10	1162	1164	1163	1162	1165	1163	1162	1164										
15	1144	1146	1145	1142	1146	1143	1144	1147										
20	1103	1107	1104	1103	1108	1102	1103	1107										
25	1069	1073	1070	1067	1074	1068	1070	1074										
30	1006	1012	1009	1005	1012	1005	1007	1012										
35	958	965	961	957	965	957	959	965										
40	876	883	878	875	885	874	877	883										
45	814	823	818	815	824	813	816	823										
50	715	724	719	716	725	713	716	725										
55	643	653	649	644	654	642	645	654										
60	530	540	537	531	540	528	532	541										
65	451	462	459	453	462	449	455	463										
70	331	343	342	333	341	330	336	343										
75	252	265	264	256	262	251	258	264										
80	140	152	153	145	150	140	147	151										
85	74.8	83.9	85.8	77.3	83.4	73.3	79.8	83.1										
90	2.49	4.62	5.94	3.99	3.41	1.52	3.38	5.41										
95	2.43	2.36	2.22	2.37	1.49	1.38	1.33	1.41										
100	2.84	2.76	2.64	2.77	1.84	1.71	1.65	1.74										
105	3.10	3.04	2.92	3.03	2.08	1.93	1.88	1.97										
110	3.50	3.43	3.34	3.44	2.41	2.28	2.26	2.32										
115	3.74	3.70	3.62	3.70	2.62	2.49	2.50	2.55										
120	4.12	4.08	4.03	4.07	2.98	2.83	2.83	2.85										
125	4.37	4.34	4.29	4.31	3.19	3.07	3.06	3.09										
130	4.69	4.70	4.65	4.68	3.53	3.47	3.39	3.45										
135	4.91	4.94	4.90	4.92	3.77	3.72	3.63	3.69										
140	5.14	5.25	5.22	5.25	4.18	4.15	4.03	4.06										
145	5.33	5.46	5.42	5.48	4.50	4.48	4.34	4.34										
150	5.56	5.71	5.68	5.75	4.89	4.93	4.82	4.79										
155	5.72	5.90	5.89	5.93	5.10	5.20	5.09	5.01										
160	5.94	6.11	6.15	6.13	5.45	5.59	5.52	5.37										
165	6.04	6.22	6.30	6.20	5.63	5.77	5.74	5.53										
170	6.15	6.32	6.43	6.24	5.90	6.02	6.14	5.83										
175	6.19	6.31	6.51	6.19	6.01	6.14	6.30	5.96										
180	6.16	6.29	6.44	6.13	6.13	6.27	6.43	6.12										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks: