


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.54 lm/W			
MODEL	TB25141209 4000K	I _{max} (cd)	3065	S/MH(C0/180)	0.80
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.81
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2523.7	η UP, DN(C0-180)	0.0,55.1
NOMINAL FLUX(lm)	2523.75	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,44.9
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

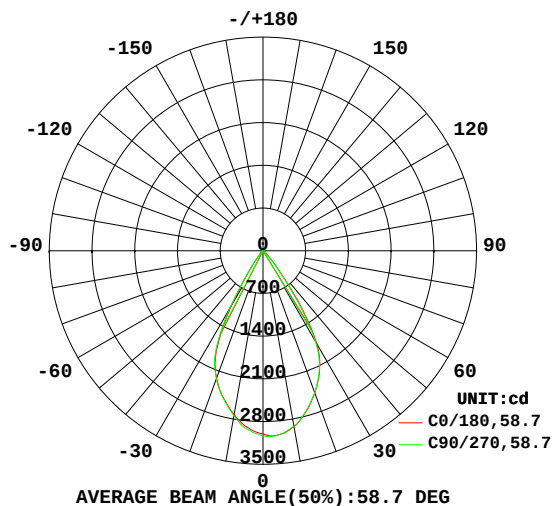

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

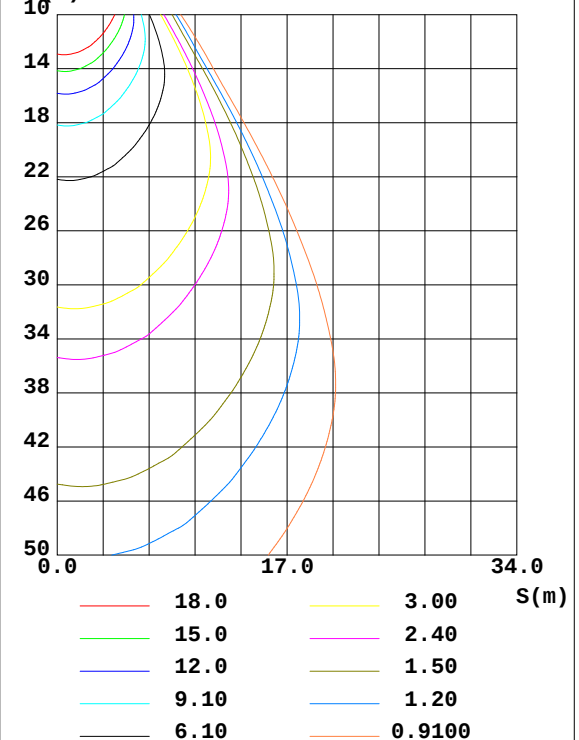

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2924	2954	2921	2837	2728	2707	2746	2837	0- 10	279.6	279.6	11.1, 11.1
20	2479	2517	2477	2387	2225	2176	2238	2346	10- 20	732.3	1012	40.1, 40.1
30	1764	1835	1721	1431	1018	926.2	1083	1416	20- 30	895.8	1908	75.6, 75.6
40	359.7	385.1	326.1	207.6	111.5	103.3	135.1	234.4	30- 40	432.7	2340	92.7, 92.7
50	65.00	66.79	63.38	56.19	50.93	50.03	51.65	56.67	40- 50	83.39	2424	96, 96
60	41.28	41.96	40.93	38.90	37.25	36.90	37.16	38.50	50- 60	41.91	2466	97.7, 97.7
70	30.88	31.57	30.09	27.08	22.73	22.02	23.25	27.07	60- 70	33.38	2499	99, 99
80	13.65	14.94	12.71	9.576	7.115	6.629	7.481	9.384	70- 80	19.60	2519	99.8, 99.8
90	1.803	2.224	1.436	0.2046	0.0926	0.0888	0.0849	0.0772	80- 90	5.089	2524	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

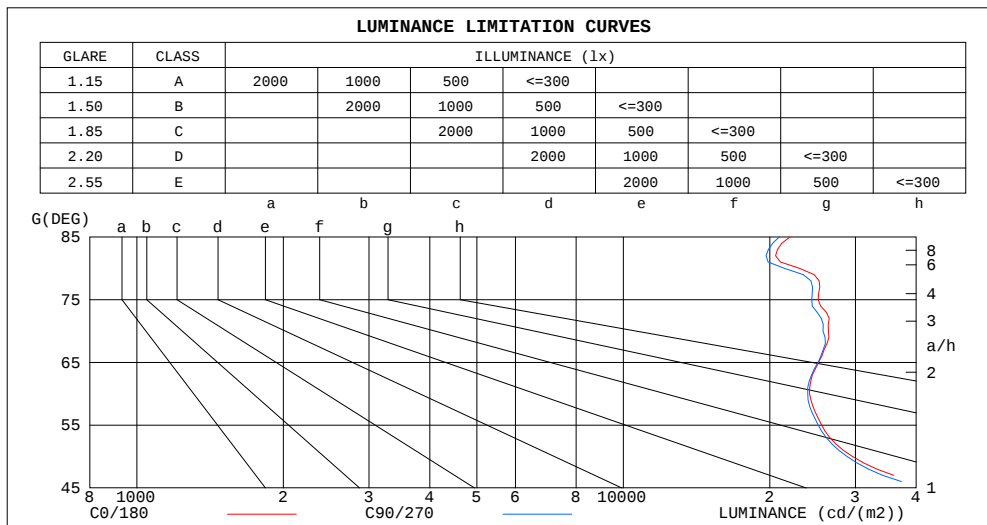

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	22019	20932
80	22977	21400
75	25152	24390
70	26396	25728
65	25206	25152
60	24142	23933
55	25562	25141
50	29570	28833
45	50794	45495


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.76	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.73	.68	.64	.72	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.64	.59	.56	.55
10.0	.63	.58	.54	.63	.57	.54	.62	.57	.54	.61	.57	.53	.61	.56	.53	.52

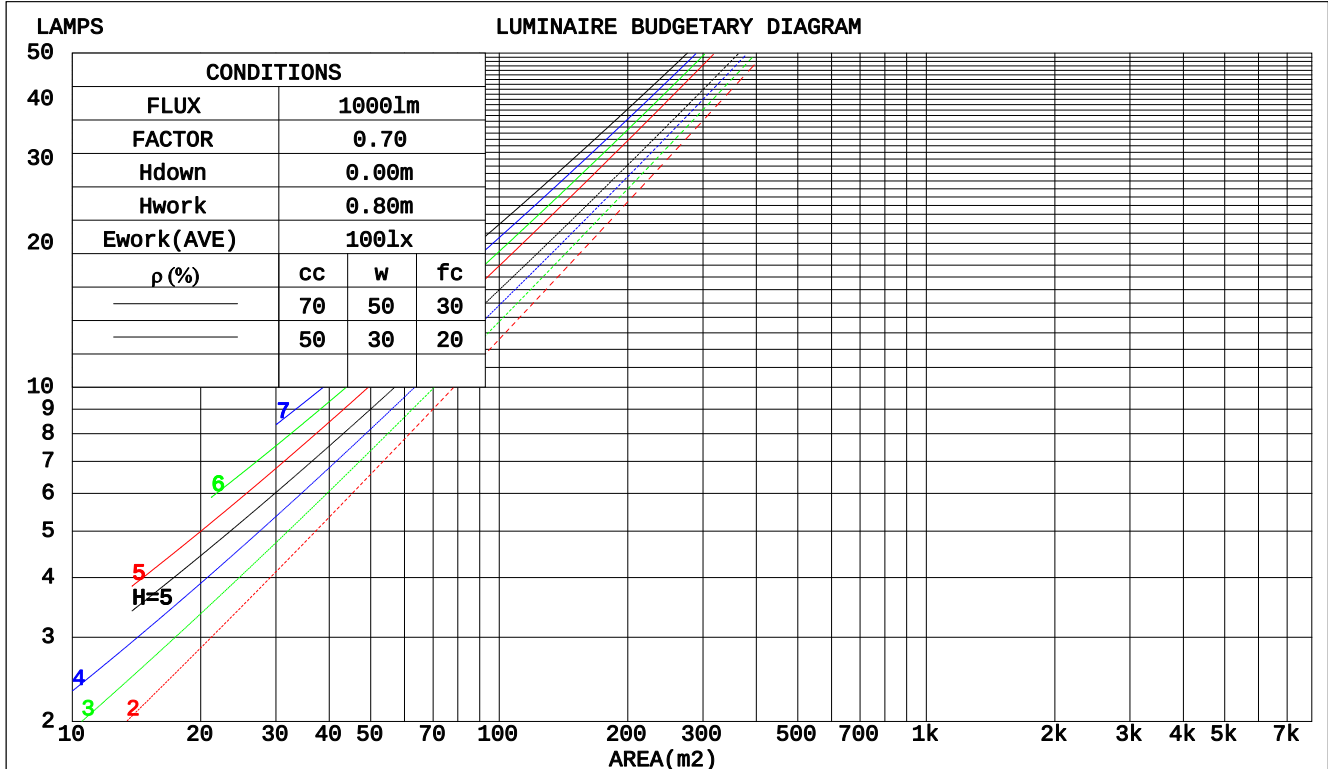

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm					
NAME: TH25-WHTC30C023P			TYPE:		WEIGHT:
SPEC.: white RA90 3000K+5700K			DIM.:		SERIAL No.:
MFR.:			SUR.: 66mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.182	.104	.033	.176	.100	.032	.163	.093	.030	.151	.087	.028	.141	.081	.026	
2.0	.173	.095	.029	.167	.092	.028	.157	.087	.027	.147	.083	.026	.138	.078	.025	
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.142	.078	.024	.134	.074	.023	
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021	
5.0	.147	.075	.022	.144	.074	.022	.137	.071	.021	.131	.069	.021	.125	.067	.020	
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.020	.126	.065	.019	.120	.063	.019	
7.0	.134	.066	.019	.131	.065	.019	.126	.064	.018	.121	.062	.018	.116	.060	.018	
8.0	.128	.063	.018	.125	.062	.017	.121	.060	.017	.116	.059	.017	.112	.058	.017	
9.0	.122	.059	.017	.120	.059	.016	.116	.057	.016	.112	.056	.016	.108	.055	.016	
10.0	.117	.056	.016	.115	.056	.016	.112	.055	.015	.108	.054	.015	.105	.053	.015	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.123	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.059	.107	.076	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.068	.043	.070	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.111	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.015	.012	.008	.005	
8.0	.105	.064	.036	.091	.056	.031	.063	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.100	.059	.031	.086	.051	.027	.060	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.095	.055	.027	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm											
NAME: TH25-WHTC30C023P					TYPE:			WEIGHT:			
SPEC.: white RA90 3000K+5700K					DIM.:			SERIAL No.:			
MFR.:					SUR.: 66mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	22.6	21.9	22.8	23.0	21.4	22.3	21.6	22.5	22.7	
	3H	21.8	22.6	22.0	22.8	23.1	21.5	22.4	21.8	22.6	22.8
	4H	21.8	22.7	22.1	22.9	23.1	21.6	22.4	21.8	22.6	22.8
	6H	21.9	22.7	22.2	22.9	23.2	21.6	22.4	21.9	22.6	22.9
	8H	21.9	22.7	22.2	22.9	23.2	21.6	22.4	21.9	22.6	22.9
	12H	21.9	22.6	22.2	22.9	23.2	21.6	22.3	21.9	22.6	22.9
4H	2H	21.5	22.4	21.8	22.6	22.8	21.3	22.1	21.5	22.3	22.5
	3H	21.7	22.5	22.1	22.7	23.0	21.5	22.2	21.8	22.5	22.7
	4H	21.9	22.5	22.2	22.8	23.1	21.6	22.3	22.0	22.6	22.9
	6H	22.0	22.6	22.4	22.9	23.3	21.8	22.3	22.1	22.7	23.0
	8H	22.1	22.6	22.5	23.0	23.3	21.8	22.3	22.2	22.7	23.0
	12H	22.1	22.6	22.5	22.9	23.3	21.8	22.3	22.2	22.7	23.1
8H	4H	21.9	22.4	22.3	22.8	23.1	21.6	22.2	22.0	22.5	22.9
	6H	22.1	22.5	22.5	22.9	23.4	21.9	22.3	22.3	22.7	23.1
	8H	22.2	22.6	22.6	23.0	23.4	21.9	22.3	22.4	22.7	23.2
	12H	22.2	22.6	22.7	23.0	23.5	22.0	22.3	22.5	22.8	23.2
12H	4H	21.9	22.3	22.3	22.7	23.1	21.6	22.1	22.0	22.5	22.9
	6H	22.1	22.5	22.5	22.9	23.3	21.8	22.2	22.3	22.6	23.1
	8H	22.2	22.5	22.7	23.0	23.4	21.9	22.3	22.4	22.7	23.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 2.3 / - 2.5					+ 2.1 / - 2.3					
1.5H	+ 4.3 / - 2.4					+ 4.1 / - 2.2					
2.0H	+ 1.1 / - 0.5					+ 0.9 / - 0.4					

CIE Pub.117, 2524 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.2)
Area: 0.00342 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	94	89	85	94	88	85	93	88	84	81
1.00	99	93	89	98	93	89	96	93	89	85
1.25	103	97	94	102	97	94	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

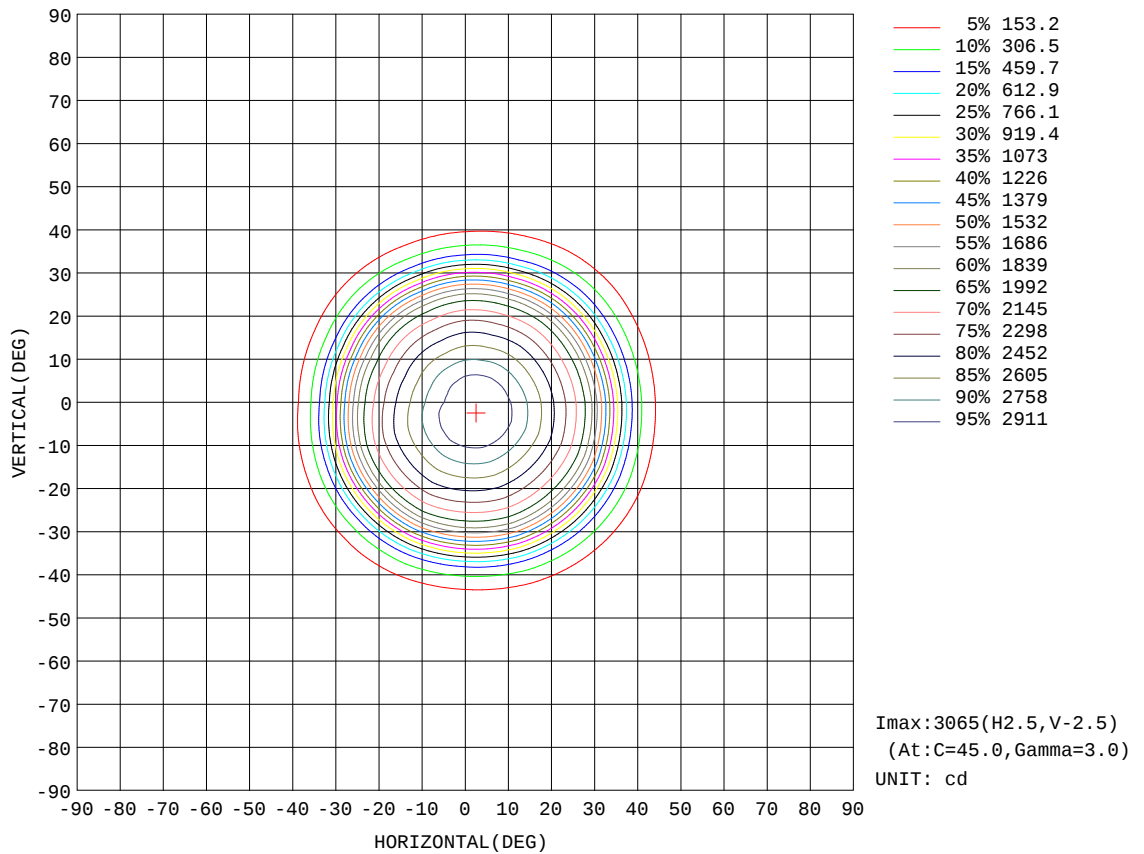


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

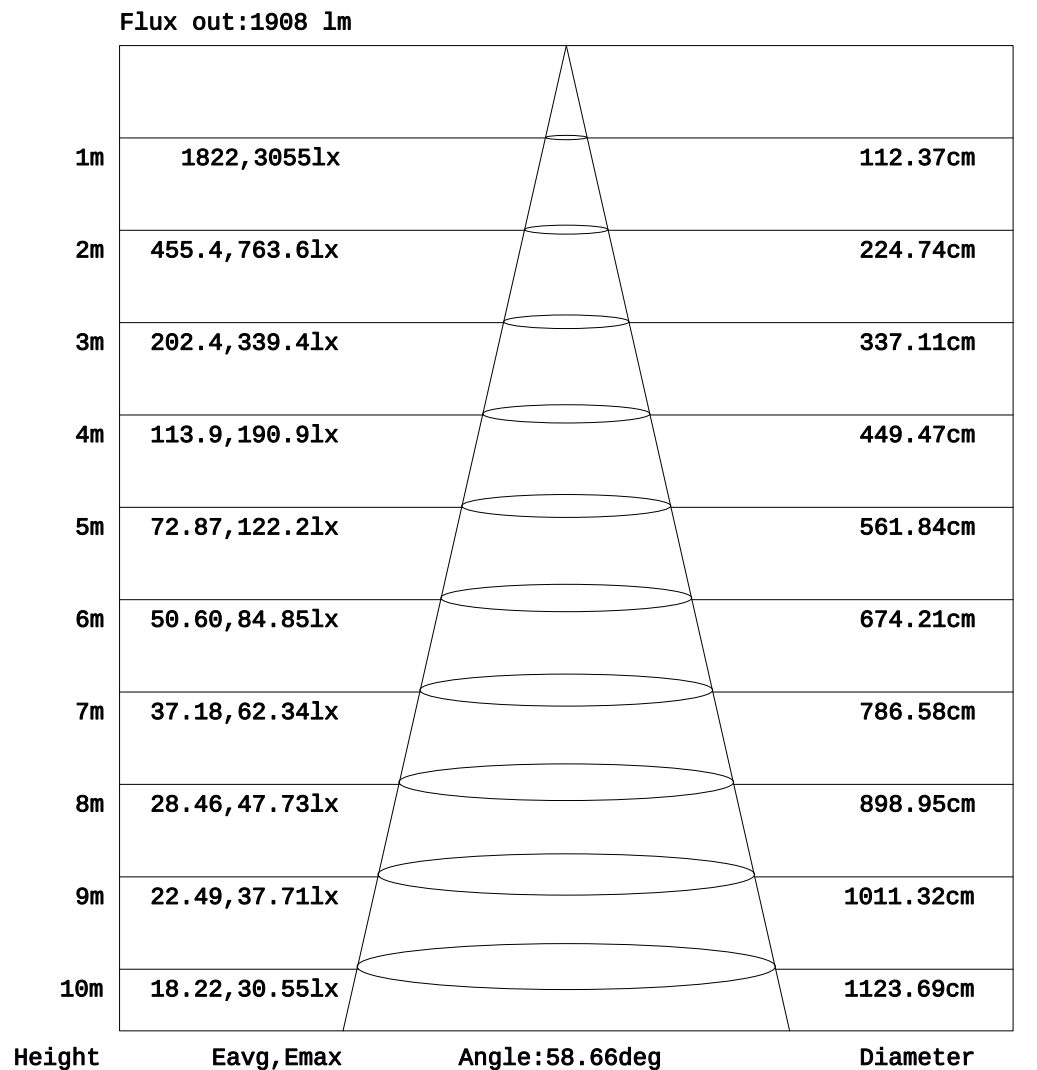


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:

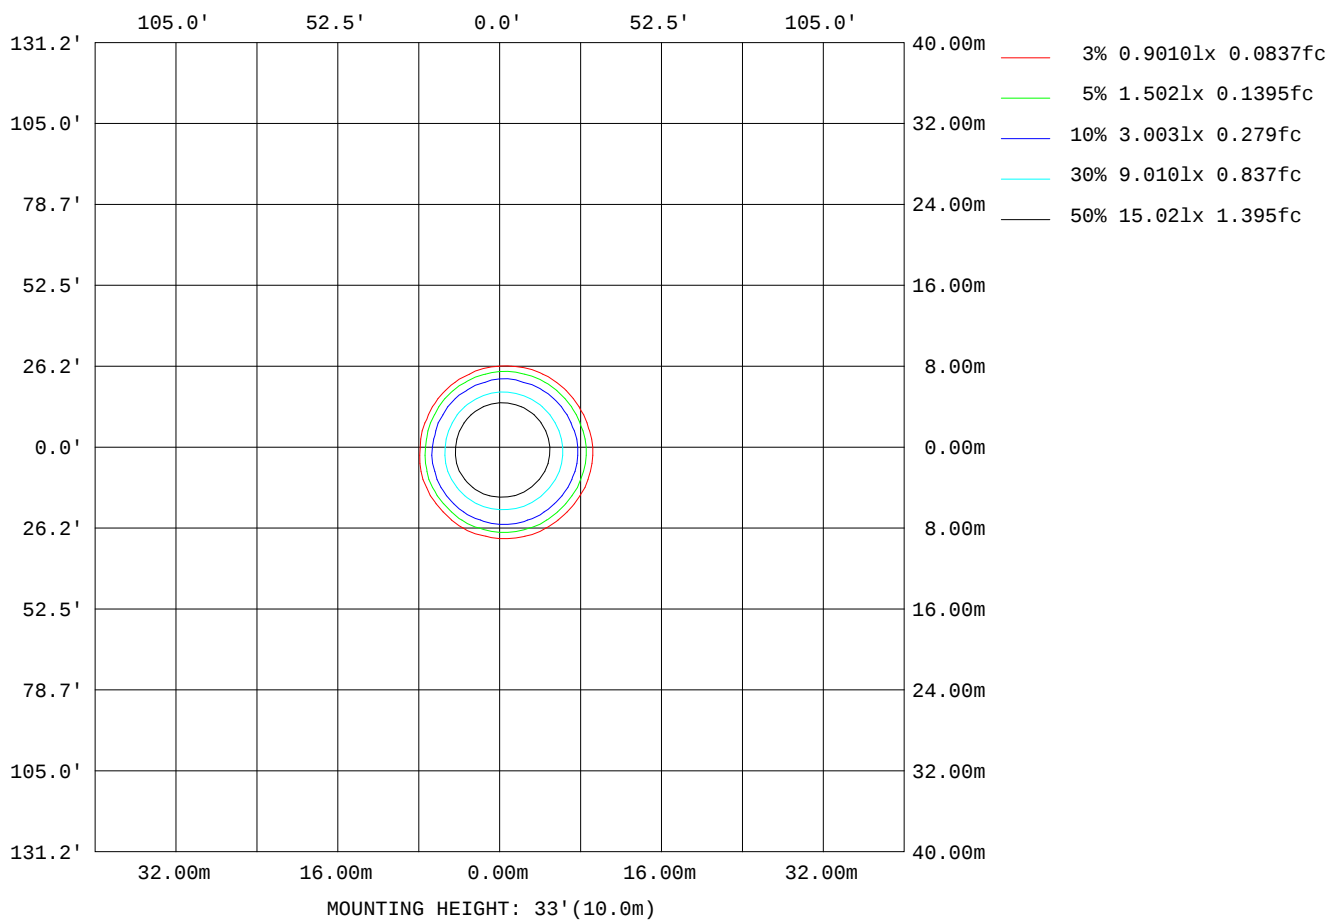

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.78V I:0.1169A P:26.142W PF:0.9694 Freq:49.99Hz Lamp Flux:2523.75x1 lm		
NAME: TH25-WHTC30C023P	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5700K	DIM.:	SERIAL No.:
MFR.:	SUR.: 66mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	23549
L_0~180(75)av	20999
L_0~180(85)av	14739
L_90~270(65)av	23680
L_90~270(75)av	21044
L_90~270(85)av	14797
L_45(65)av	23512
L_45(75)av	21012
L_45(85)av	14716

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-05-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

Planar Illuminance Curve

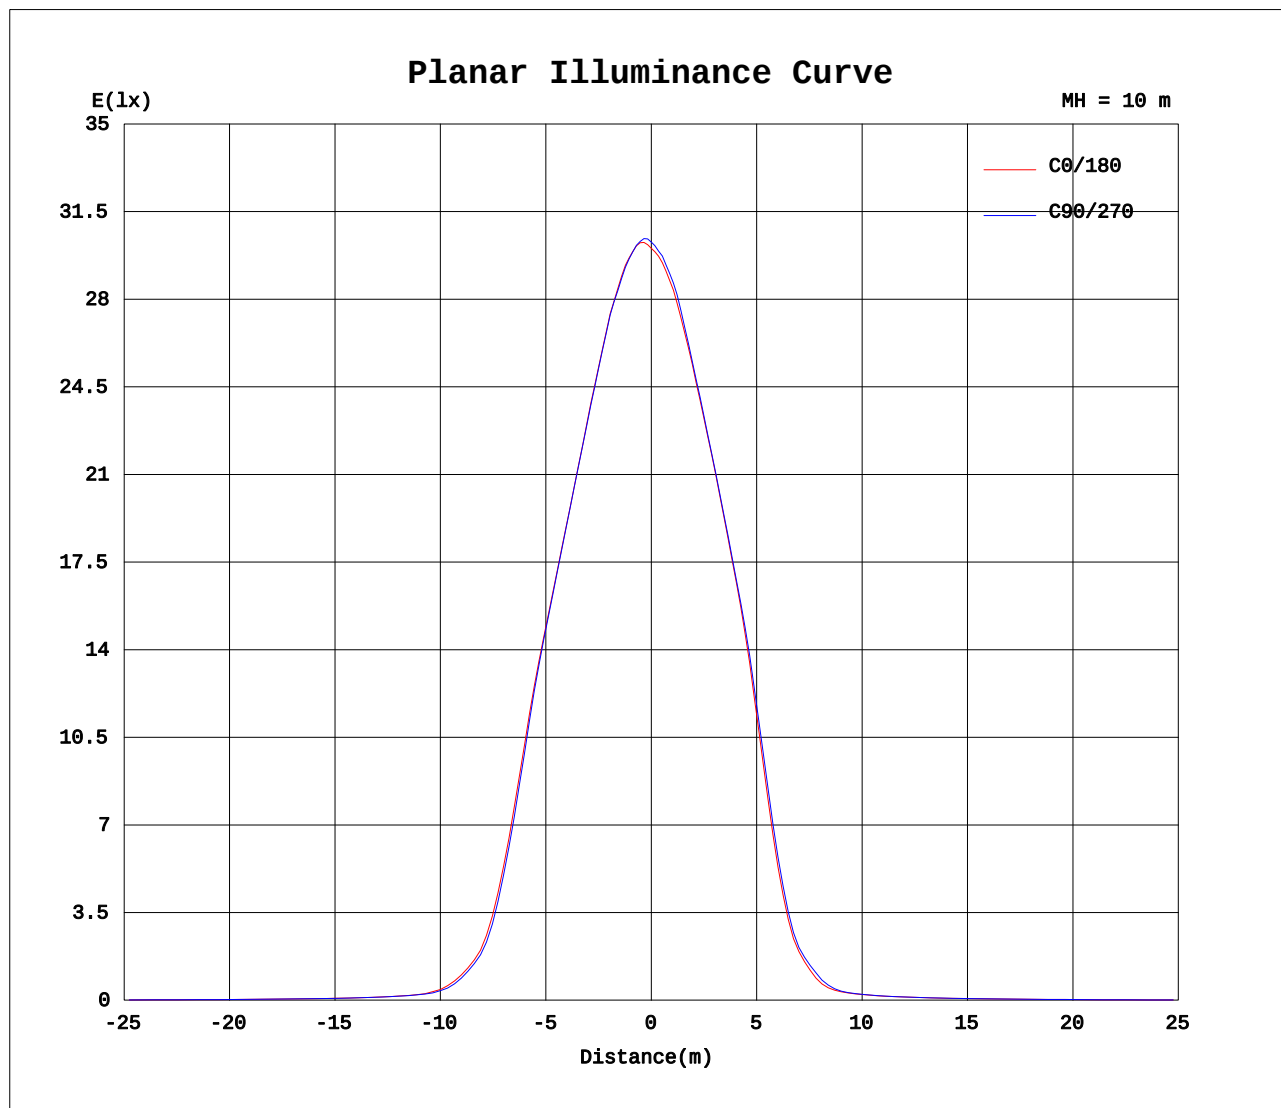

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2024-05-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.450m [K=1.0000]
 Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

```