


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.56 lm/W			
MODEL	2835 64 3000K	I _{max} (cd)	1071	S/MH(C0/180)	1.28
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3143.4	η UP, DN(C0-180)	0.4, 49.5
NOMINAL FLUX(lm)	3143.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3, 49.8
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	99.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

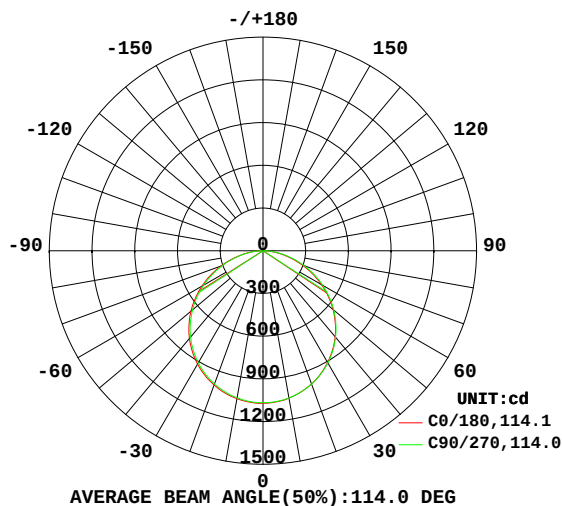

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

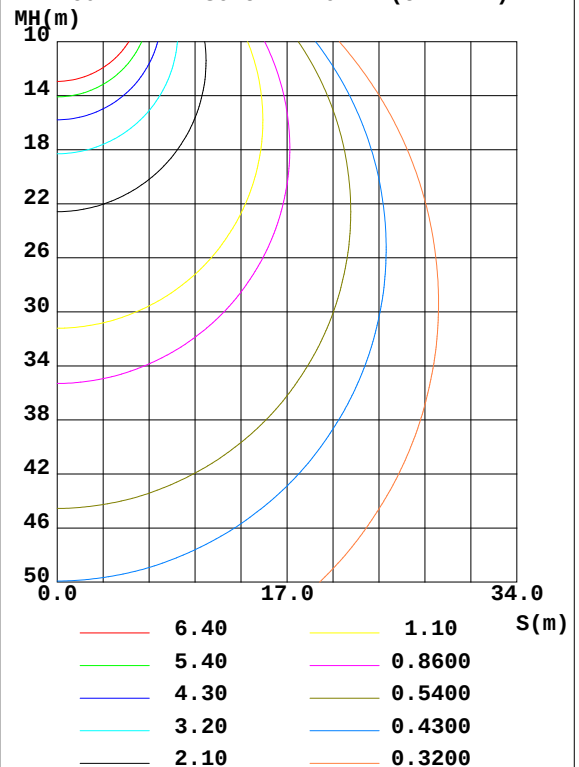

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1051	1053	1050	1048	1055	1051	1049	1051	0- 10	101.2	101.2	3.22,3.22
20	996.3	999.3	996.5	993.8	1004	996.7	996.1	998.6	10- 20	290.4	391.6	12.5,12.5
30	907.6	913.5	910.6	906.4	919.7	909.6	909.1	913.2	20- 30	441.8	833.4	26.5,26.5
40	789.1	796.2	793.6	789.1	804.4	791.8	791.5	796.9	30- 40	535.6	1369	43.6,43.6
50	642.8	652.8	649.7	645.1	661.0	646.8	646.3	653.9	40- 50	559.1	1928	61.3,61.3
60	474.4	486.1	484.7	478.7	494.1	479.3	480.6	487.8	50- 60	508.0	2436	77.5,77.5
70	294.3	307.6	308.6	300.8	314.2	300.1	303.6	309.0	60- 70	390.3	2826	89.9,89.9
80	122.4	135.7	138.5	130.4	140.6	128.6	133.1	136.3	70- 80	229.4	3056	97.2,97.2
90	2.071	3.511	5.409	3.529	4.711	1.608	3.024	4.848	80- 90	67.08	3123	99.3,99.3
100	2.548	2.479	2.365	2.486	1.606	1.487	1.445	1.539	90-100	2.117	3125	99.4,99.4
110	3.140	3.101	3.001	3.079	2.117	1.992	1.975	2.054	100-110	2.406	3127	99.5,99.5
120	3.714	3.671	3.608	3.649	2.625	2.482	2.494	2.548	110-120	2.804	3130	99.6,99.6
130	4.222	4.234	4.167	4.190	3.126	3.038	2.991	3.078	120-130	3.013	3133	99.7,99.7
140	4.642	4.742	4.683	4.720	3.708	3.663	3.565	3.612	130-140	3.014	3136	99.8,99.8
150	4.961	5.126	5.067	5.148	4.358	4.387	4.271	4.262	140-150	2.783	3139	99.9,99.9
160	5.293	5.466	5.483	5.469	4.866	4.953	4.918	4.807	150-160	2.277	3141	99.9,99.9
170	5.487	5.626	5.718	5.553	5.265	5.374	5.441	5.198	160-170	1.500	3143	100,100
180	5.491	5.597	5.721	5.484	5.491	5.579	5.725	5.473	170-180	0.5261	3143	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

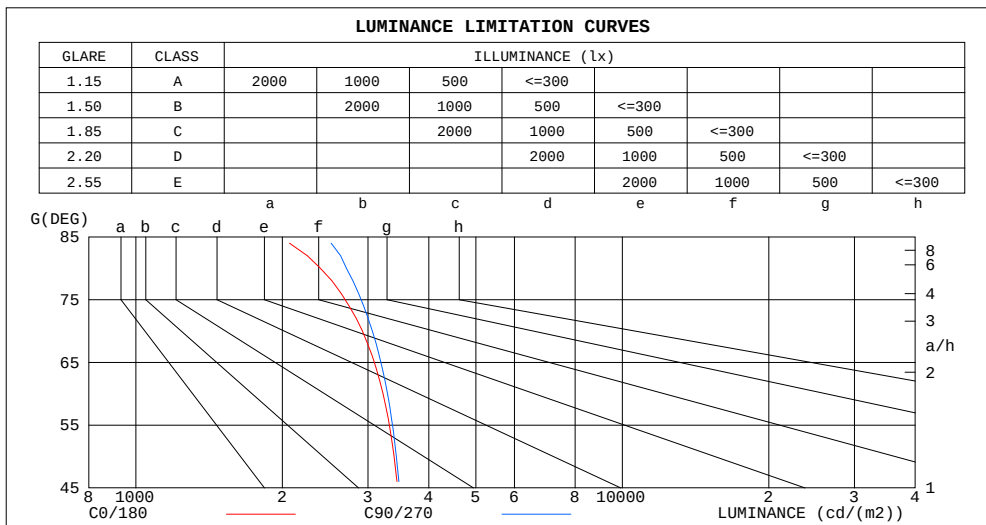

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2483	3022
80	2394	2709
75	2922	3130
70	2922	3063
65	3238	3333
60	3221	3291
55	3419	3468
50	3395	3432
45	3521	3546


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.37	.30	.25	.36	.30	.25	.24

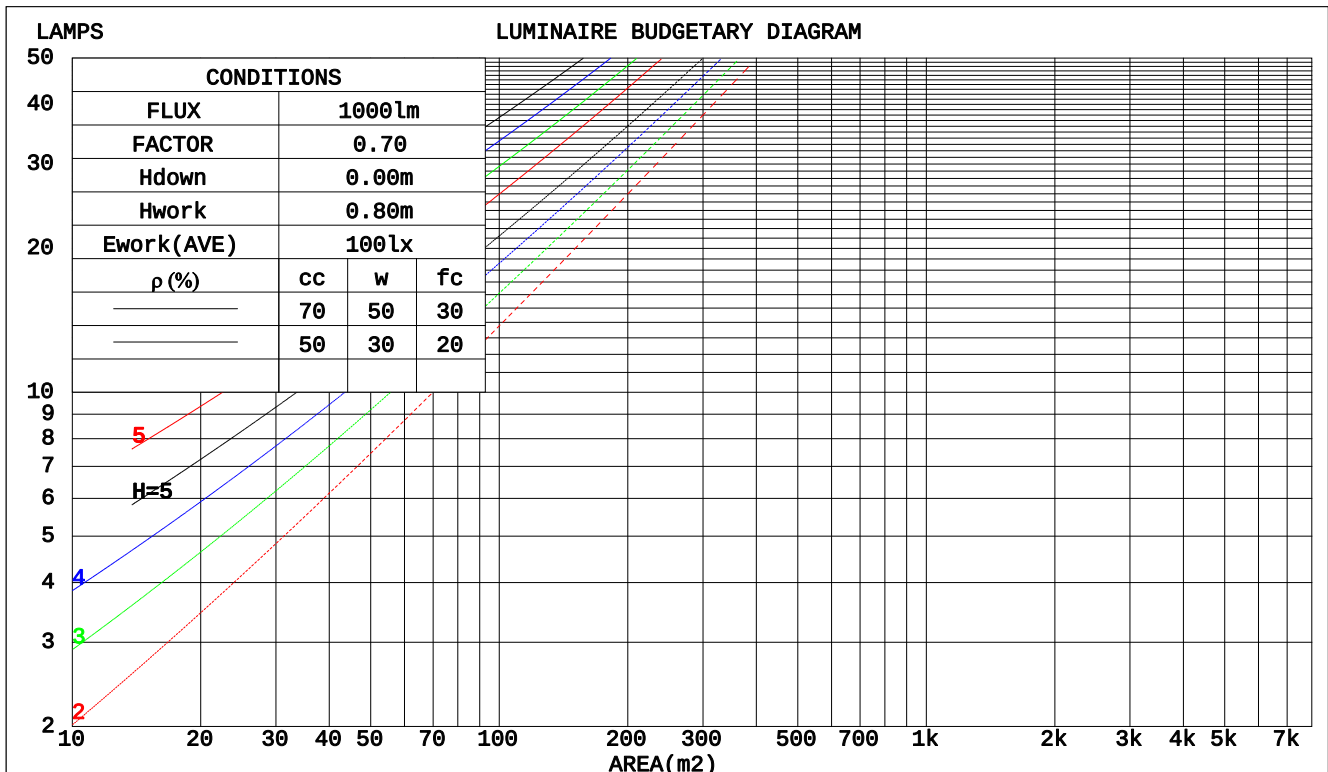

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm					
NAME: LPB new 40w 1200x300 WH TC			TYPE:		WEIGHT:
SPEC.: 40W			DIM.:		SERIAL No.:
MFR.:			SUR.: 1155*255mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.315	.179	.057	.307	.175	.056	.294	.169	.054	.281	.162	.052	.270	.156	.050	
2.0	.295	.162	.050	.289	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.219	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.186	.161	.139	.159	.138	.120	.109	.095	.083	.063	.055	.048	.020	.018	.016	
2.0	.178	.137	.103	.152	.118	.089	.104	.082	.062	.060	.047	.036	.019	.015	.012	
3.0	.170	.119	.079	.146	.103	.069	.100	.072	.048	.058	.042	.028	.019	.014	.009	
4.0	.162	.106	.063	.139	.092	.055	.096	.064	.039	.055	.037	.023	.018	.012	.008	
5.0	.155	.096	.052	.133	.083	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.148	.087	.044	.127	.076	.038	.088	.053	.027	.051	.031	.016	.016	.010	.005	
7.0	.141	.081	.038	.121	.070	.033	.084	.049	.024	.049	.029	.014	.016	.009	.005	
8.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
9.0	.128	.070	.030	.111	.061	.026	.077	.043	.019	.045	.025	.011	.014	.008	.004	
10.0	.123	.066	.028	.106	.057	.024	.073	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm											
NAME: LPB new 40w 1200x300 WH TC					TYPE:			WEIGHT:			
SPEC.: 40W					DIM.:			SERIAL No.:			
MFR.:					SUR.: 1155*255mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		13.0	14.6	13.3	14.8	15.0	13.1	14.6	13.4	14.9	15.1
	3H	14.6	16.0	14.9	16.2	16.5	14.7	16.1	15.0	16.3	16.6
	4H	15.1	16.5	15.5	16.8	17.0	15.3	16.7	15.7	16.9	17.2
	6H	15.6	16.8	15.9	17.1	17.4	15.8	17.1	16.2	17.4	17.7
	8H	15.7	16.9	16.0	17.2	17.5	16.0	17.2	16.3	17.5	17.8
	12H	15.8	16.9	16.1	17.2	17.6	16.1	17.3	16.4	17.6	17.9
4H	2H	13.7	15.0	14.0	15.3	15.6	13.7	15.1	14.1	15.3	15.6
	3H	15.4	16.6	15.7	16.9	17.2	15.5	16.7	15.9	17.0	17.3
	4H	16.1	17.2	16.5	17.5	17.9	16.3	17.3	16.6	17.7	18.0
	6H	16.6	17.6	17.1	18.0	18.3	16.9	17.8	17.3	18.2	18.6
	8H	16.8	17.7	17.3	18.1	18.5	17.1	18.0	17.5	18.4	18.8
	12H	16.9	17.8	17.4	18.2	18.6	17.3	18.1	17.7	18.5	18.9
8H	4H	16.4	17.3	16.8	17.7	18.1	16.5	17.4	17.0	17.8	18.2
	6H	17.1	17.8	17.6	18.3	18.7	17.3	18.1	17.8	18.5	18.9
	8H	17.4	18.0	17.8	18.5	18.9	17.6	18.3	18.1	18.7	19.2
	12H	17.6	18.1	18.0	18.6	19.1	17.9	18.4	18.4	18.9	19.4
12H	4H	16.4	17.2	16.9	17.6	18.1	16.6	17.4	17.0	17.8	18.2
	6H	17.2	17.8	17.6	18.3	18.7	17.4	18.0	17.8	18.5	18.9
	8H	17.5	18.0	18.0	18.5	19.0	17.7	18.3	18.2	18.8	19.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 3143 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.0)
Area: 0.294525 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	77	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

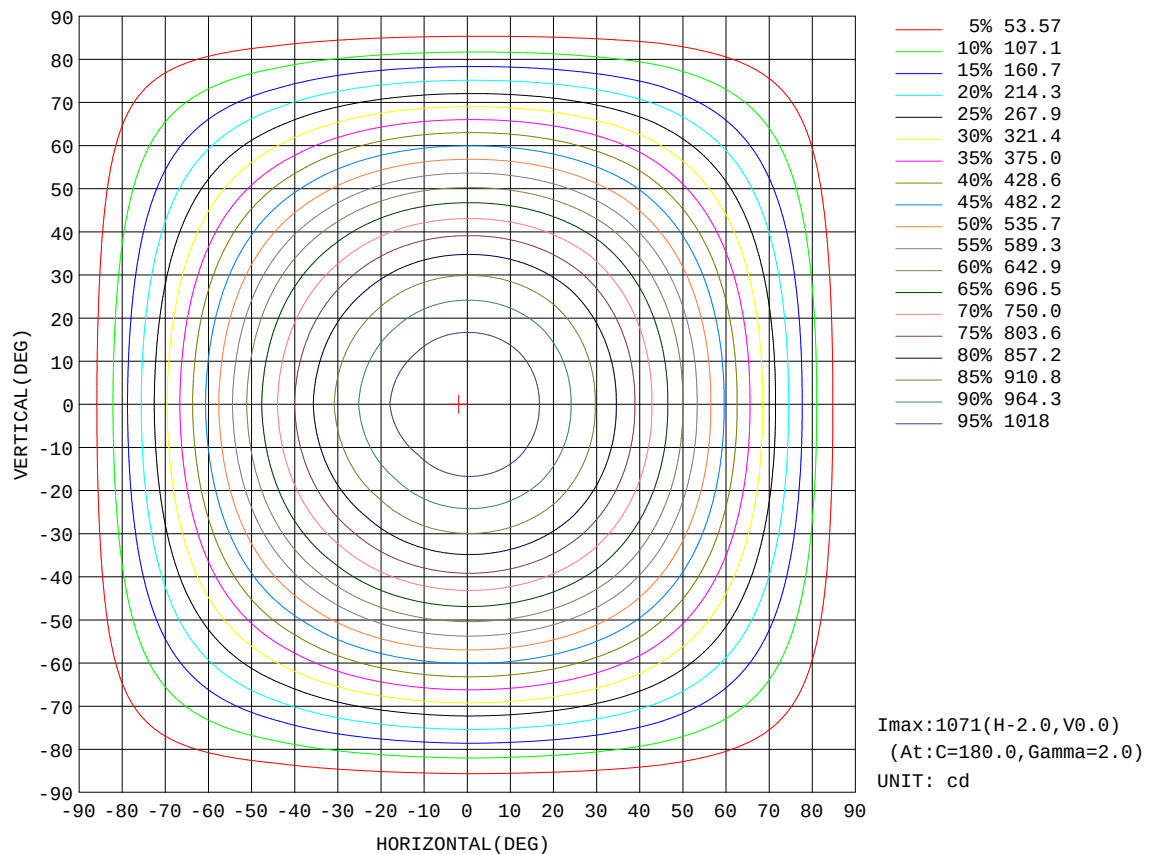


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

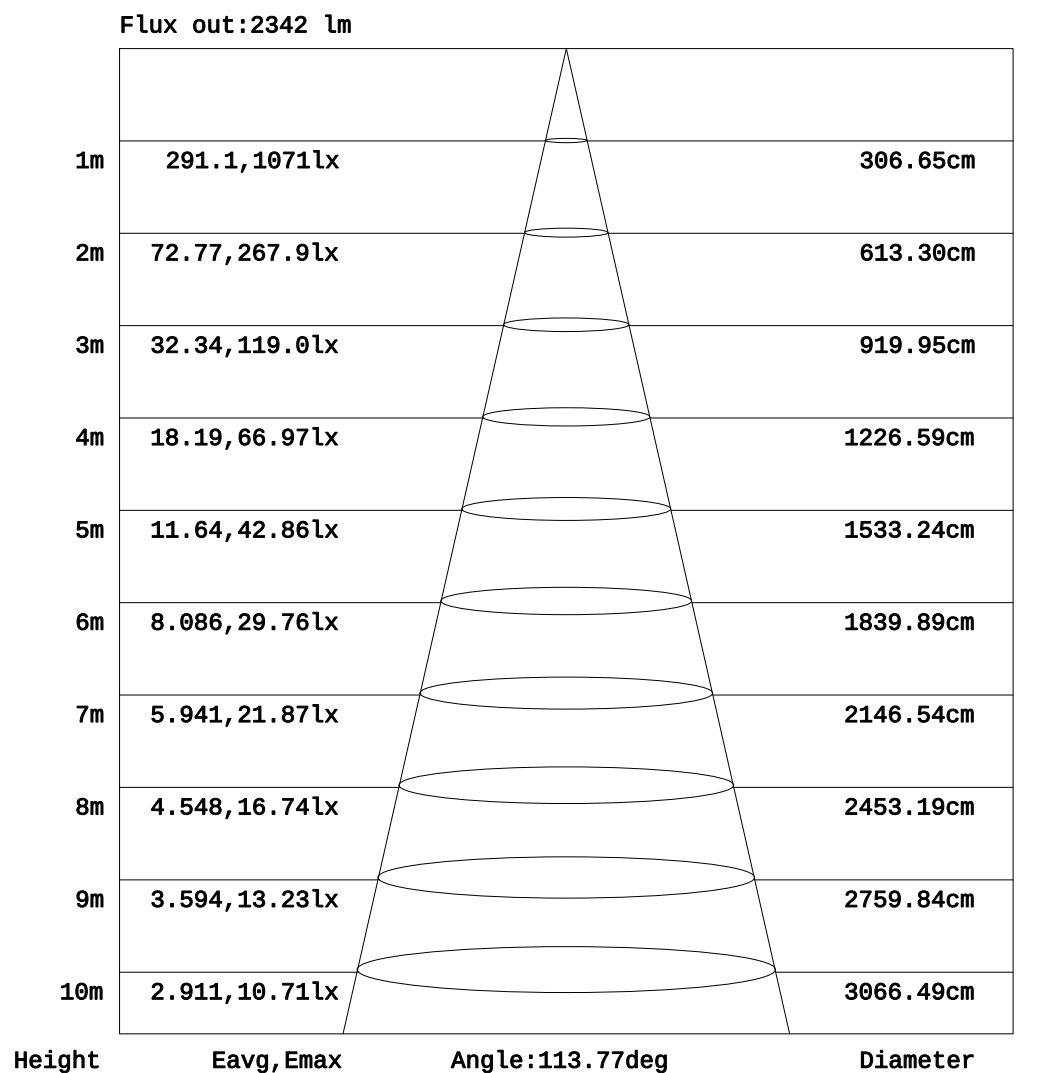


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

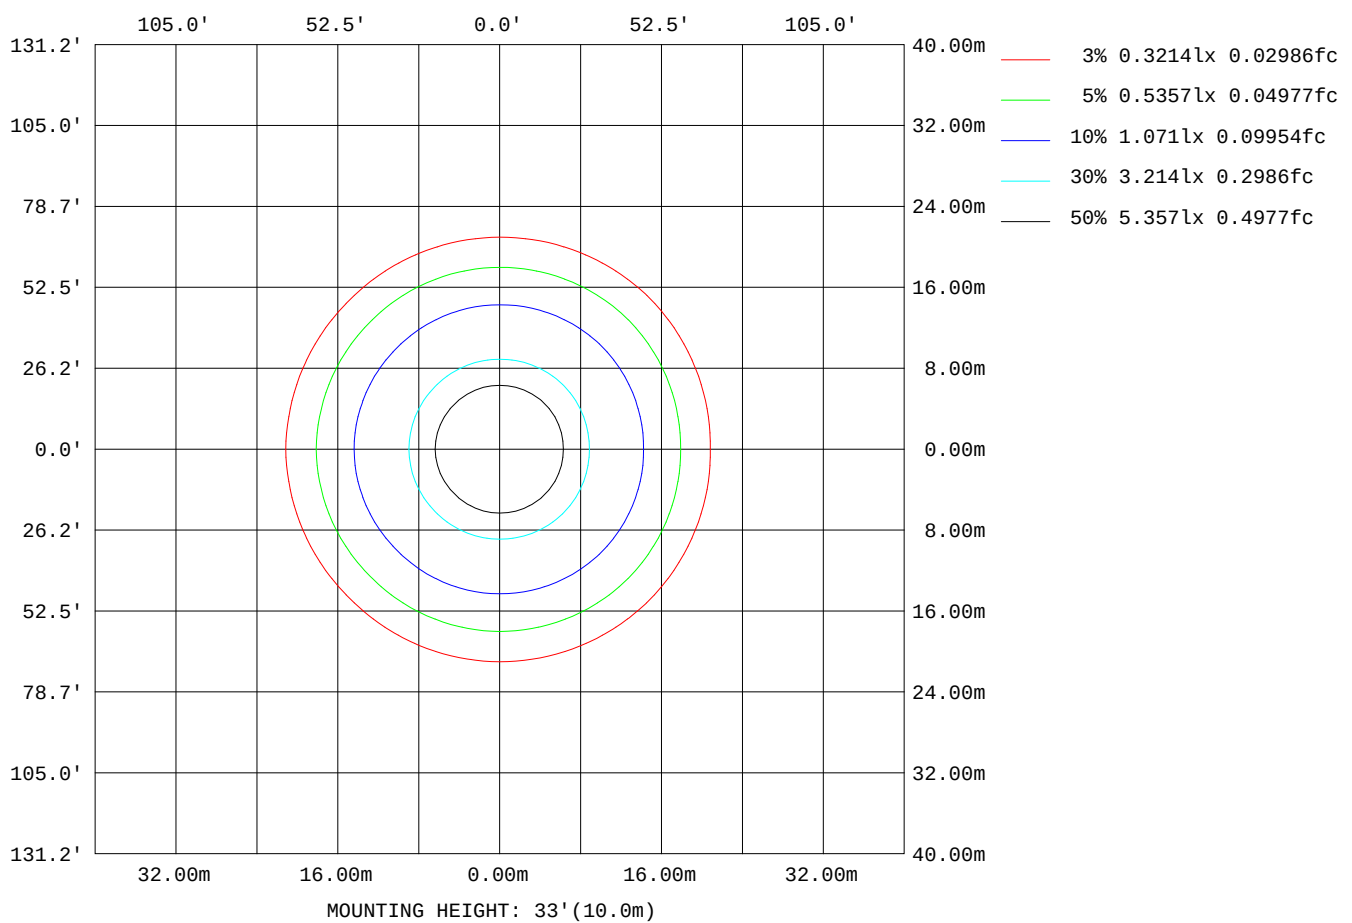

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3173
L_0~180(75)av	2821
L_0~180(85)av	2253
L_90~270(65)av	3172
L_90~270(75)av	2871
L_90~270(85)av	2353
L_45(65)av	3168
L_45(75)av	2838
L_45(85)av	2245

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

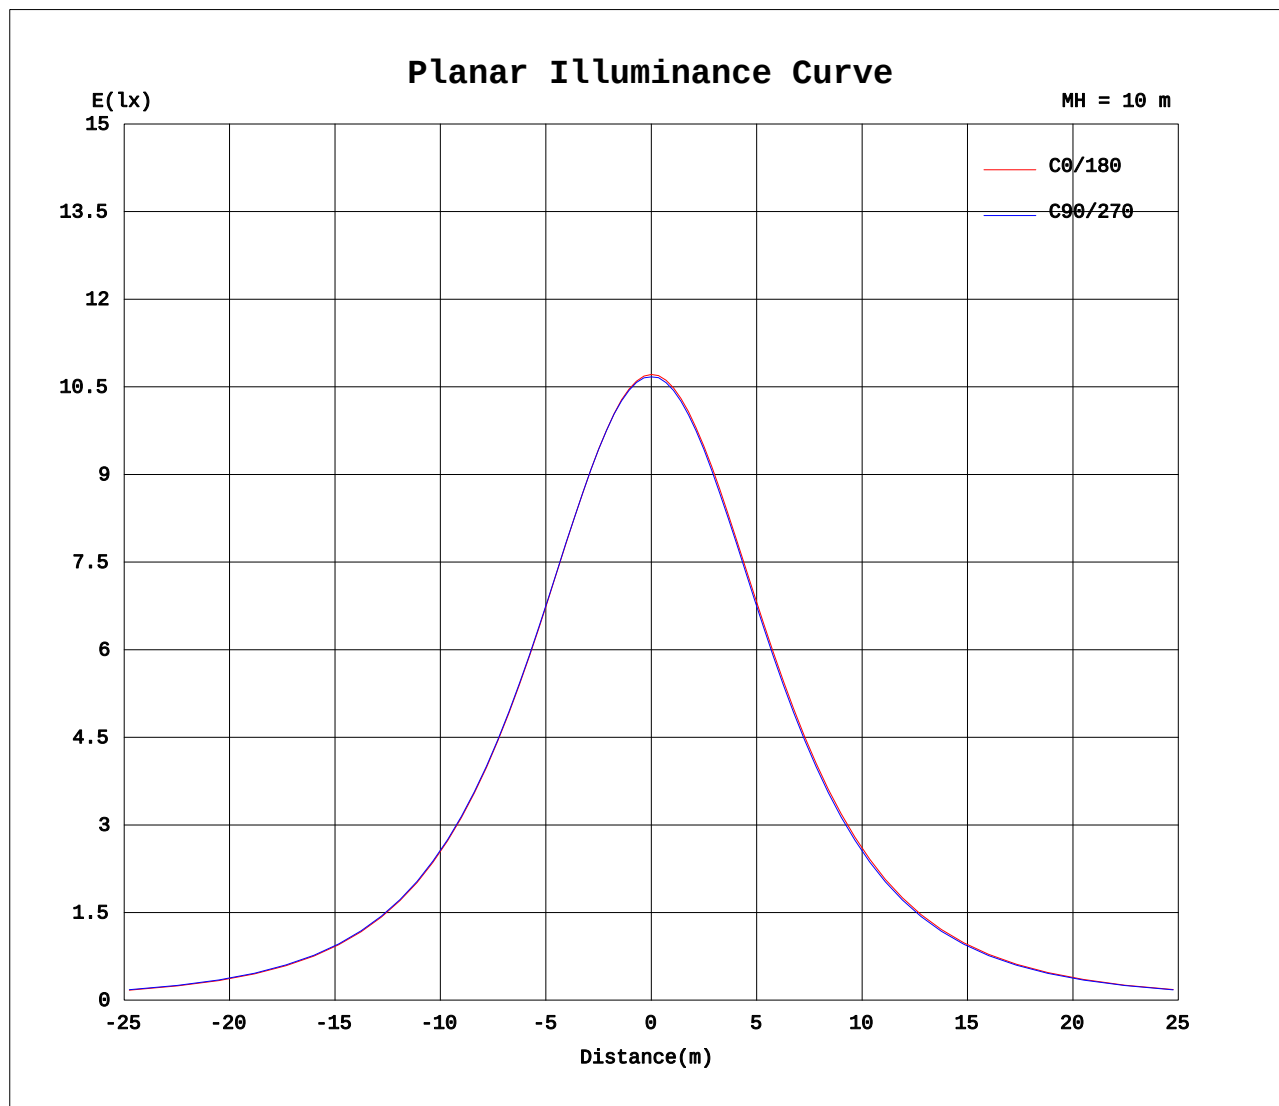

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2021-05-20

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.78V I:0.1673A P:35.493W PF:0.9611 Freq:50.01Hz Lamp Flux:3143.4x1 lm		
NAME: LPB new 40w 1200x300 WH TC	TYPE:	WEIGHT:
SPEC.: 40W	DIM.:	SERIAL No.:
MFR.:	SUR.: 1155*255mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1071	1070	1067	1067	1071	1070	1067	1067										
5	1068	1067	1065	1064	1069	1067	1065	1065										
10	1051	1053	1050	1048	1055	1051	1049	1051										
15	1033	1035	1033	1031	1039	1034	1033	1034										
20	996	999	996	994	1004	997	996	999										
25	965	969	966	963	974	966	965	968										
30	908	914	911	906	920	910	909	913										
35	864	870	868	863	877	866	866	870										
40	789	796	794	789	804	792	792	797										
45	733	742	738	735	750	738	736	743										
50	643	653	650	645	661	647	646	654										
55	578	588	586	581	597	582	582	590										
60	474	486	485	479	494	479	481	488										
65	403	415	415	408	423	408	410	417										
70	294	308	309	301	314	300	304	309										
75	223	237	239	231	242	229	234	238										
80	122	136	139	130	141	129	133	136										
85	63.7	74.3	77.6	69.7	79.7	68.2	72.0	74.8										
90	2.07	3.51	5.41	3.53	4.71	1.61	3.02	4.85										
95	2.19	2.12	1.99	2.13	1.30	1.20	1.17	1.24										
100	2.55	2.48	2.36	2.49	1.61	1.49	1.44	1.54										
105	2.80	2.73	2.61	2.72	1.82	1.68	1.65	1.74										
110	3.14	3.10	3.00	3.08	2.12	1.99	1.97	2.05										
115	3.37	3.34	3.25	3.31	2.30	2.19	2.19	2.26										
120	3.71	3.67	3.61	3.65	2.63	2.48	2.49	2.55										
125	3.93	3.89	3.84	3.86	2.83	2.69	2.69	2.75										
130	4.22	4.23	4.17	4.19	3.13	3.04	2.99	3.08										
135	4.44	4.46	4.38	4.41	3.34	3.29	3.21	3.28										
140	4.64	4.74	4.68	4.72	3.71	3.66	3.57	3.61										
145	4.80	4.93	4.87	4.92	3.99	3.95	3.84	3.87										
150	4.96	5.13	5.07	5.15	4.36	4.39	4.27	4.26										
155	5.11	5.29	5.26	5.31	4.56	4.62	4.53	4.47										
160	5.29	5.47	5.48	5.47	4.87	4.95	4.92	4.81										
165	5.40	5.54	5.60	5.54	5.00	5.12	5.09	4.94										
170	5.49	5.63	5.72	5.55	5.26	5.37	5.44	5.20										
175	5.52	5.62	5.78	5.52	5.37	5.45	5.60	5.32										
180	5.49	5.60	5.72	5.48	5.49	5.58	5.73	5.47										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2021-05-20

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.250m [K=1.0000]
Remarks: