


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.80 lm/W			
MODEL	TB8-1911A 4000K	I _{max} (cd)	1127	S/MH(C0/180)	0.84
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	974.73	η UP, DN(C0-180)	0.0, 49.7
NOMINAL FLUX(lm)	974.727	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 50.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

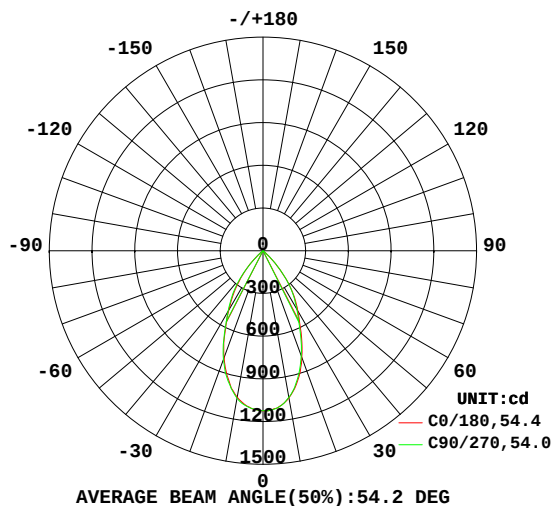

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

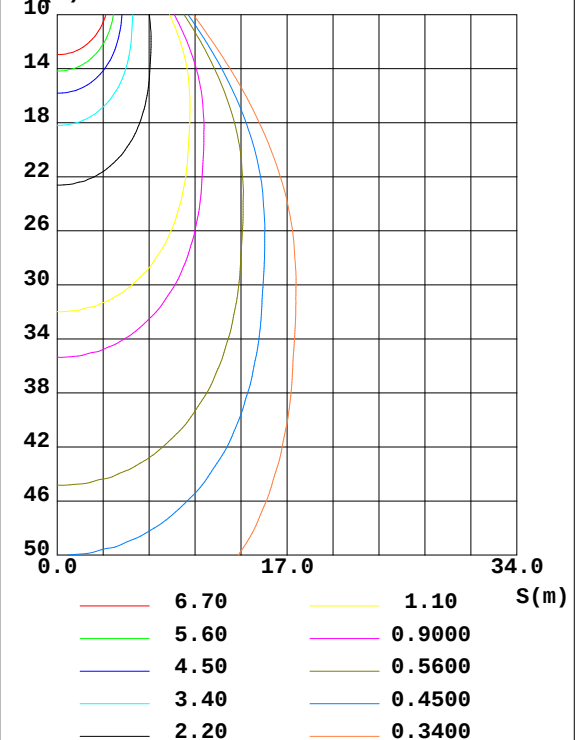

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1049	1047	1046	1044	1045	1043	1052	1059	0- 10	103.9	103.9	10.7,10.7
20	798.3	797.2	785.4	784.6	800.4	801.6	811.9	819.1	10- 20	261.6	365.4	37.5,37.5
30	489.3	485.3	476.7	468.3	481.3	492.5	491.4	492.5	20- 30	289.8	655.2	67.2,67.2
40	233.3	235.8	234.2	224.8	226.5	226.5	238.6	243.2	30- 40	224.3	879.5	90.2,90.2
50	22.40	23.13	19.47	20.00	22.60	24.03	22.68	23.33	40- 50	84.58	964.1	98.9,98.9
60	3.534	3.421	3.324	3.417	3.465	3.427	3.497	3.593	50- 60	8.032	972.1	99.7,99.7
70	0.9472	1.024	1.059	1.094	0.9443	0.9828	1.021	1.106	60- 70	1.940	974.1	99.9,99.9
80	0.2281	0.2205	0.2243	0.2281	0.1695	0.1696	0.2043	0.2312	70- 80	0.5400	974.6	100,100
90	0.0425	0.0386	0.0386	0.0347	0	0	0	0	80- 90	0.0990	974.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.450m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

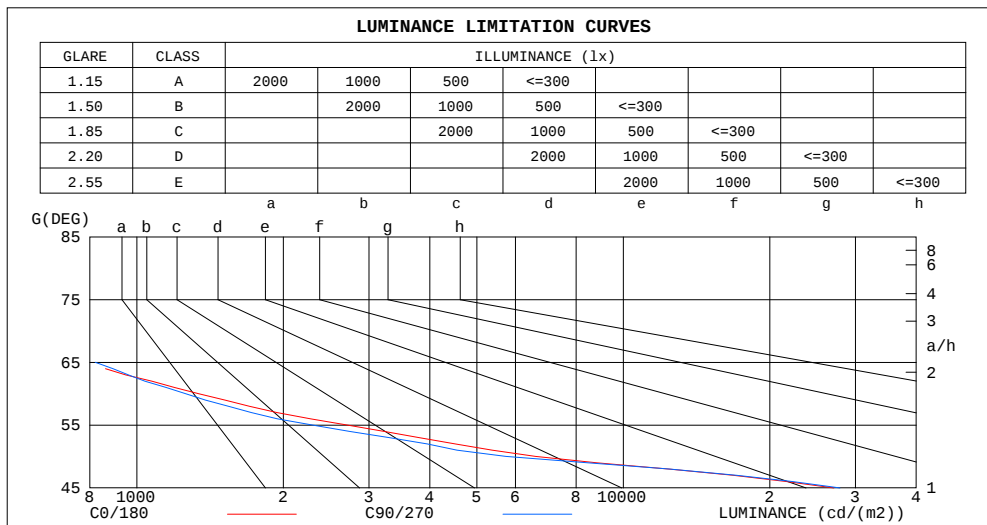


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.83	.77	.73	.82	.77	.73	.81	.76	.72	.79	.75	.71	.77	.74	.71	.69
6.0	.78	.72	.68	.77	.72	.67	.76	.71	.67	.74	.70	.67	.73	.69	.66	.65
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.66	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.68	.63	.59	.67	.62	.58	.66	.62	.58	.65	.61	.58	.56
9.0	.65	.59	.55	.64	.59	.55	.64	.58	.55	.63	.58	.54	.62	.57	.54	.53
10.0	.61	.56	.52	.61	.55	.52	.60	.55	.51	.59	.55	.51	.59	.54	.51	.50

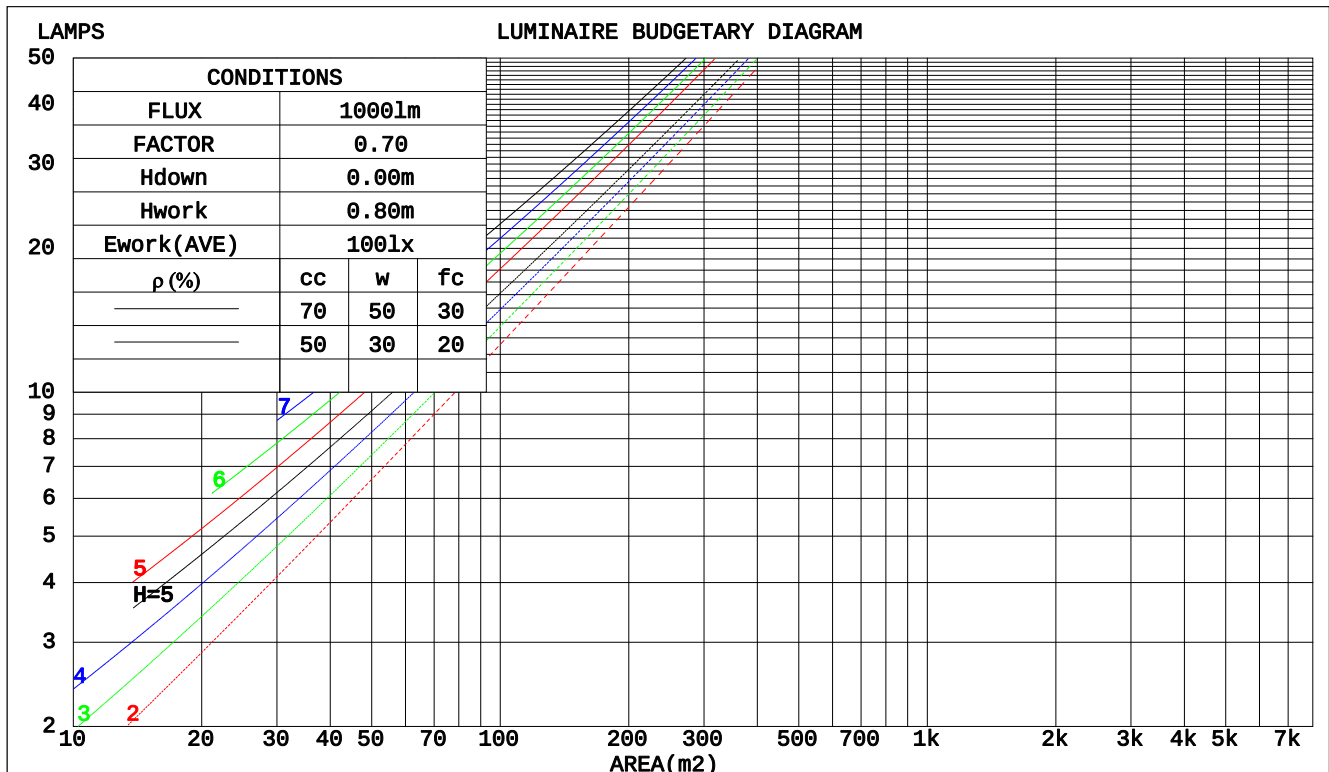

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm					
NAME: DL1757-WHTC13C01			TYPE:		WEIGHT:
SPEC.: white RA90 3000K+5000K			DIM.:		SERIAL No.:
MFR.:			SUR.: 82mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.180	.102	.032	.173	.099	.031	.160	.092	.029	.149	.086	.028	.138	.080	.026	
2.0	.173	.095	.029	.167	.092	.028	.157	.087	.027	.147	.082	.026	.138	.078	.025	
3.0	.165	.088	.026	.160	.086	.026	.151	.082	.025	.143	.078	.024	.135	.075	.023	
4.0	.158	.082	.024	.154	.080	.024	.146	.077	.023	.138	.074	.022	.132	.072	.022	
5.0	.151	.077	.022	.147	.075	.022	.140	.073	.021	.134	.071	.021	.128	.068	.021	
6.0	.144	.072	.021	.141	.071	.020	.135	.069	.020	.129	.067	.020	.124	.065	.019	
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.019	.120	.062	.018	
8.0	.132	.064	.018	.129	.064	.018	.124	.062	.018	.120	.061	.018	.116	.059	.017	
9.0	.126	.061	.017	.124	.060	.017	.120	.059	.017	.116	.058	.017	.112	.057	.016	
10.0	.121	.058	.016	.119	.058	.016	.115	.056	.016	.112	.055	.016	.108	.054	.016	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.108	.076	.051	.074	.053	.036	.043	.031	.022	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.036	.092	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm											
NAME: DL1757-WHTC13C01						TYPE:			WEIGHT:		
SPEC.: white RA90 3000K+5000K						DIM.:			SERIAL No.:		
MFR.:						SUR.: 82mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.1	21.1	20.3	21.2	21.4	20.0	21.0	20.2	21.1	21.3
	3H	19.9	20.8	20.2	21.0	21.2	19.8	20.7	20.1	20.9	21.1
	4H	19.8	20.7	20.1	20.9	21.1	19.7	20.6	20.0	20.8	21.0
	6H	19.7	20.5	20.0	20.8	21.0	19.7	20.4	20.0	20.7	20.9
	8H	19.7	20.4	20.0	20.7	21.0	19.6	20.4	19.9	20.6	20.9
	12H	19.6	20.4	20.0	20.6	20.9	19.6	20.3	19.9	20.6	20.8
4H	2H	19.8	20.7	20.1	20.9	21.1	19.7	20.6	20.0	20.8	21.0
	3H	19.6	20.4	20.0	20.6	20.9	19.6	20.3	19.9	20.6	20.8
	4H	19.5	20.2	19.9	20.5	20.8	19.5	20.1	19.8	20.4	20.7
	6H	19.4	20.0	19.8	20.4	20.7	19.4	20.0	19.8	20.3	20.6
	8H	19.4	19.9	19.8	20.3	20.7	19.3	19.9	19.7	20.2	20.6
	12H	19.4	19.8	19.8	20.2	20.6	19.3	19.8	19.7	20.1	20.5
8H	4H	19.4	19.9	19.8	20.3	20.7	19.3	19.9	19.7	20.2	20.6
	6H	19.3	19.7	19.7	20.1	20.5	19.2	19.7	19.7	20.1	20.5
	8H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.6	20.0	20.4
	12H	19.2	19.5	19.7	20.0	20.4	19.1	19.4	19.6	19.9	20.4
12H	4H	19.4	19.8	19.8	20.2	20.6	19.3	19.8	19.7	20.1	20.5
	6H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.6	20.0	20.4
	8H	19.2	19.5	19.7	20.0	20.4	19.1	19.4	19.6	19.9	20.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 2.7 / -17.2					+ 2.7 / -17.5					
1.5H	+ 5.0 / -14.7					+ 4.9 / -14.9					
2.0H	+ 7.9 / -12.7					+ 8.0 / -12.4					

CIE Pub.117, 974.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
Area: 0.00528 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	74	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

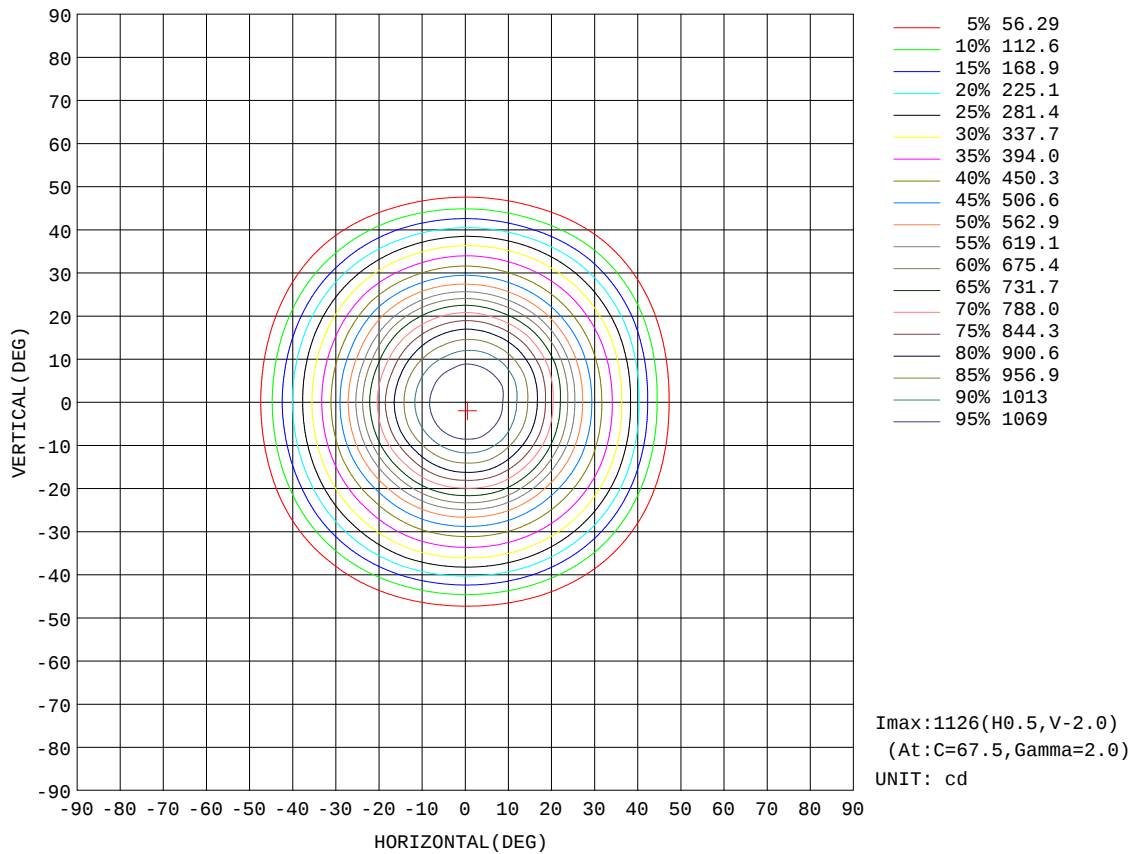


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

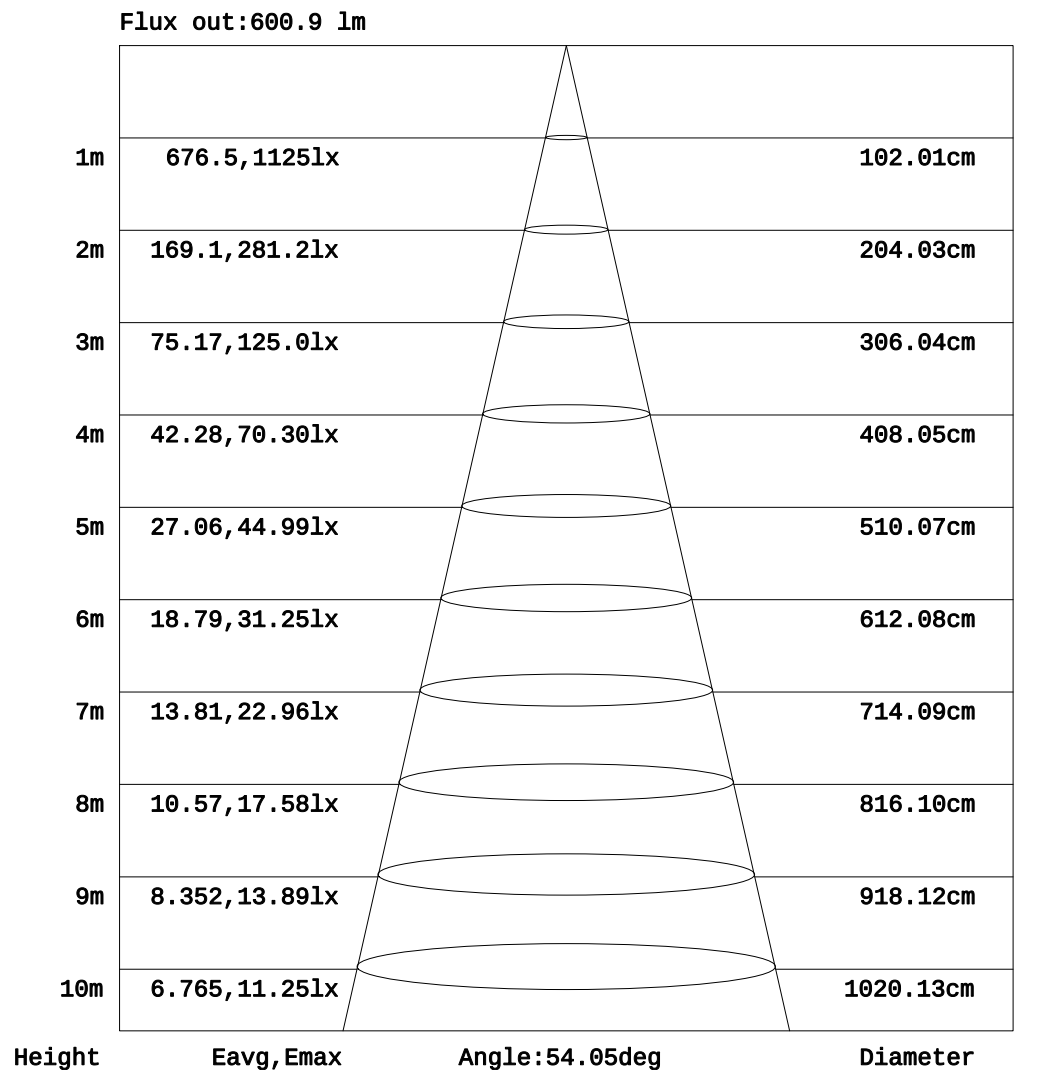


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:

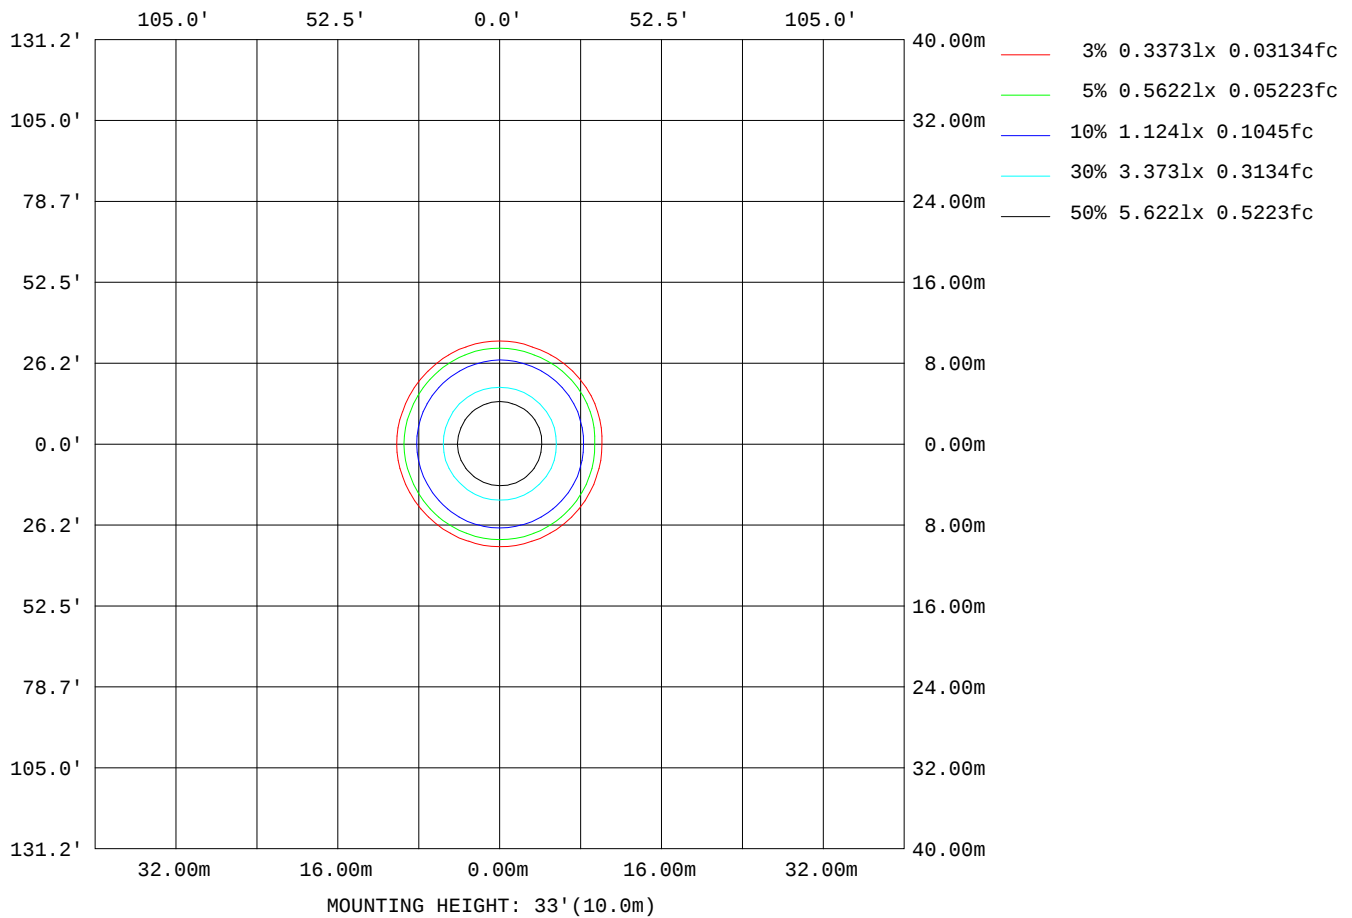

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.82V I:0.0470A P:9.5745W PF:0.8821 Freq:49.99Hz Lamp Flux:974.727x1 lm		
NAME: DL1757-WHTC13C01	TYPE:	WEIGHT:
SPEC.: white RA90 3000K+5000K	DIM.:	SERIAL No.:
MFR.:	SUR.: 82mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	781
L_0~180(75)av	273
L_0~180(85)av	151
L_90~270(65)av	840
L_90~270(75)av	329
L_90~270(85)av	197
L_45(65)av	837
L_45(75)av	323
L_45(85)av	184

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:
Test Date:2024-12-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

Planar Illuminance Curve

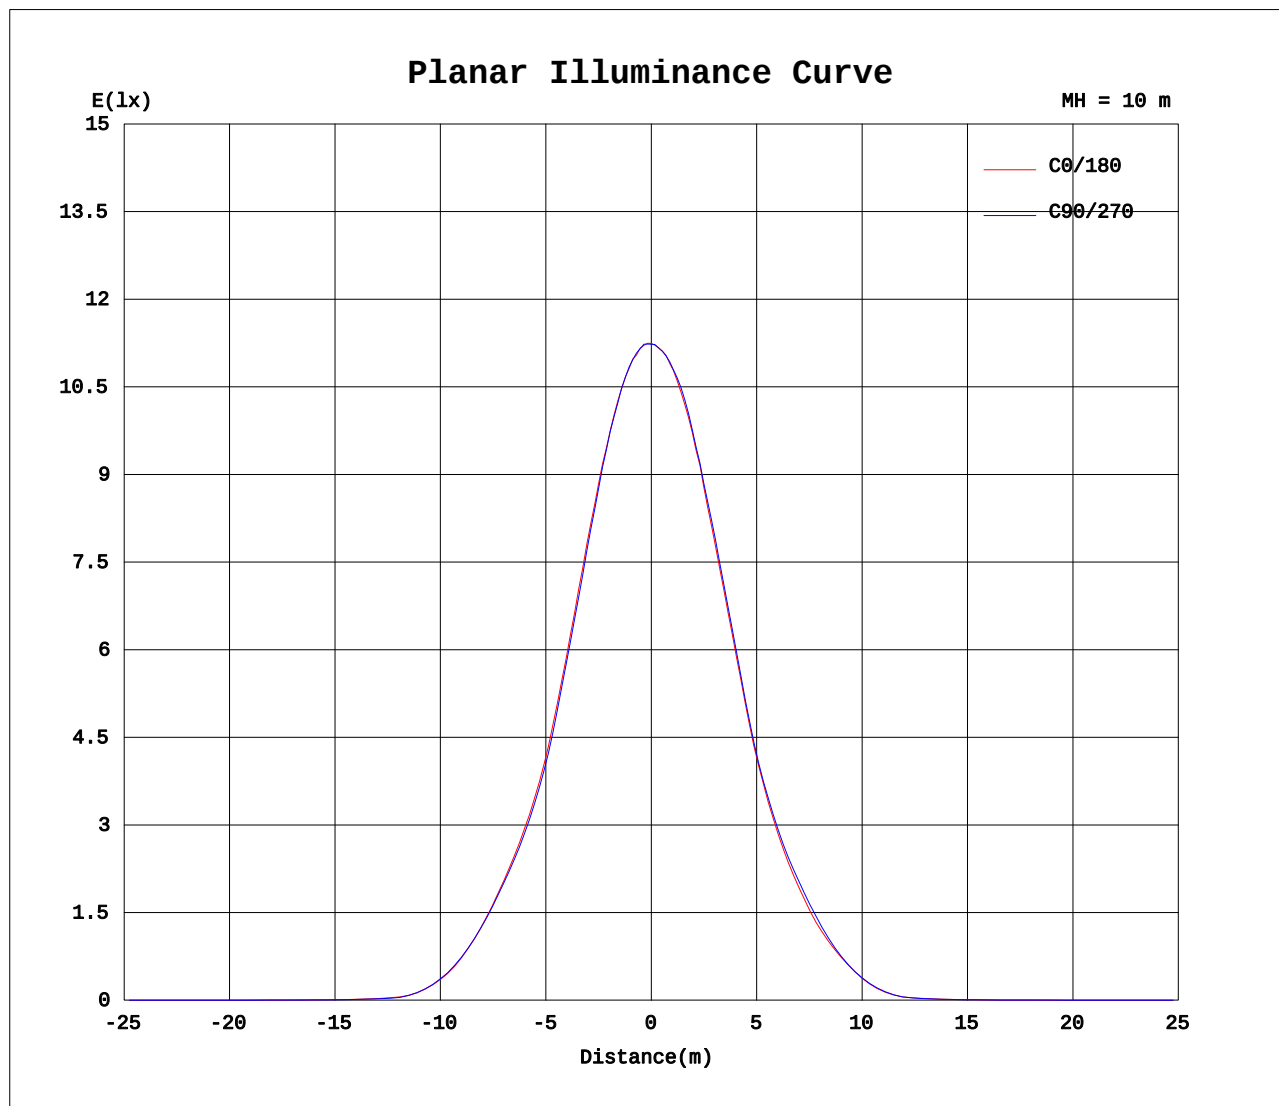

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators:
Test Date: 2024-12-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 7.450m [K=1.0000]
Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:7.450m [K=1.0000]
Remarks:

```