




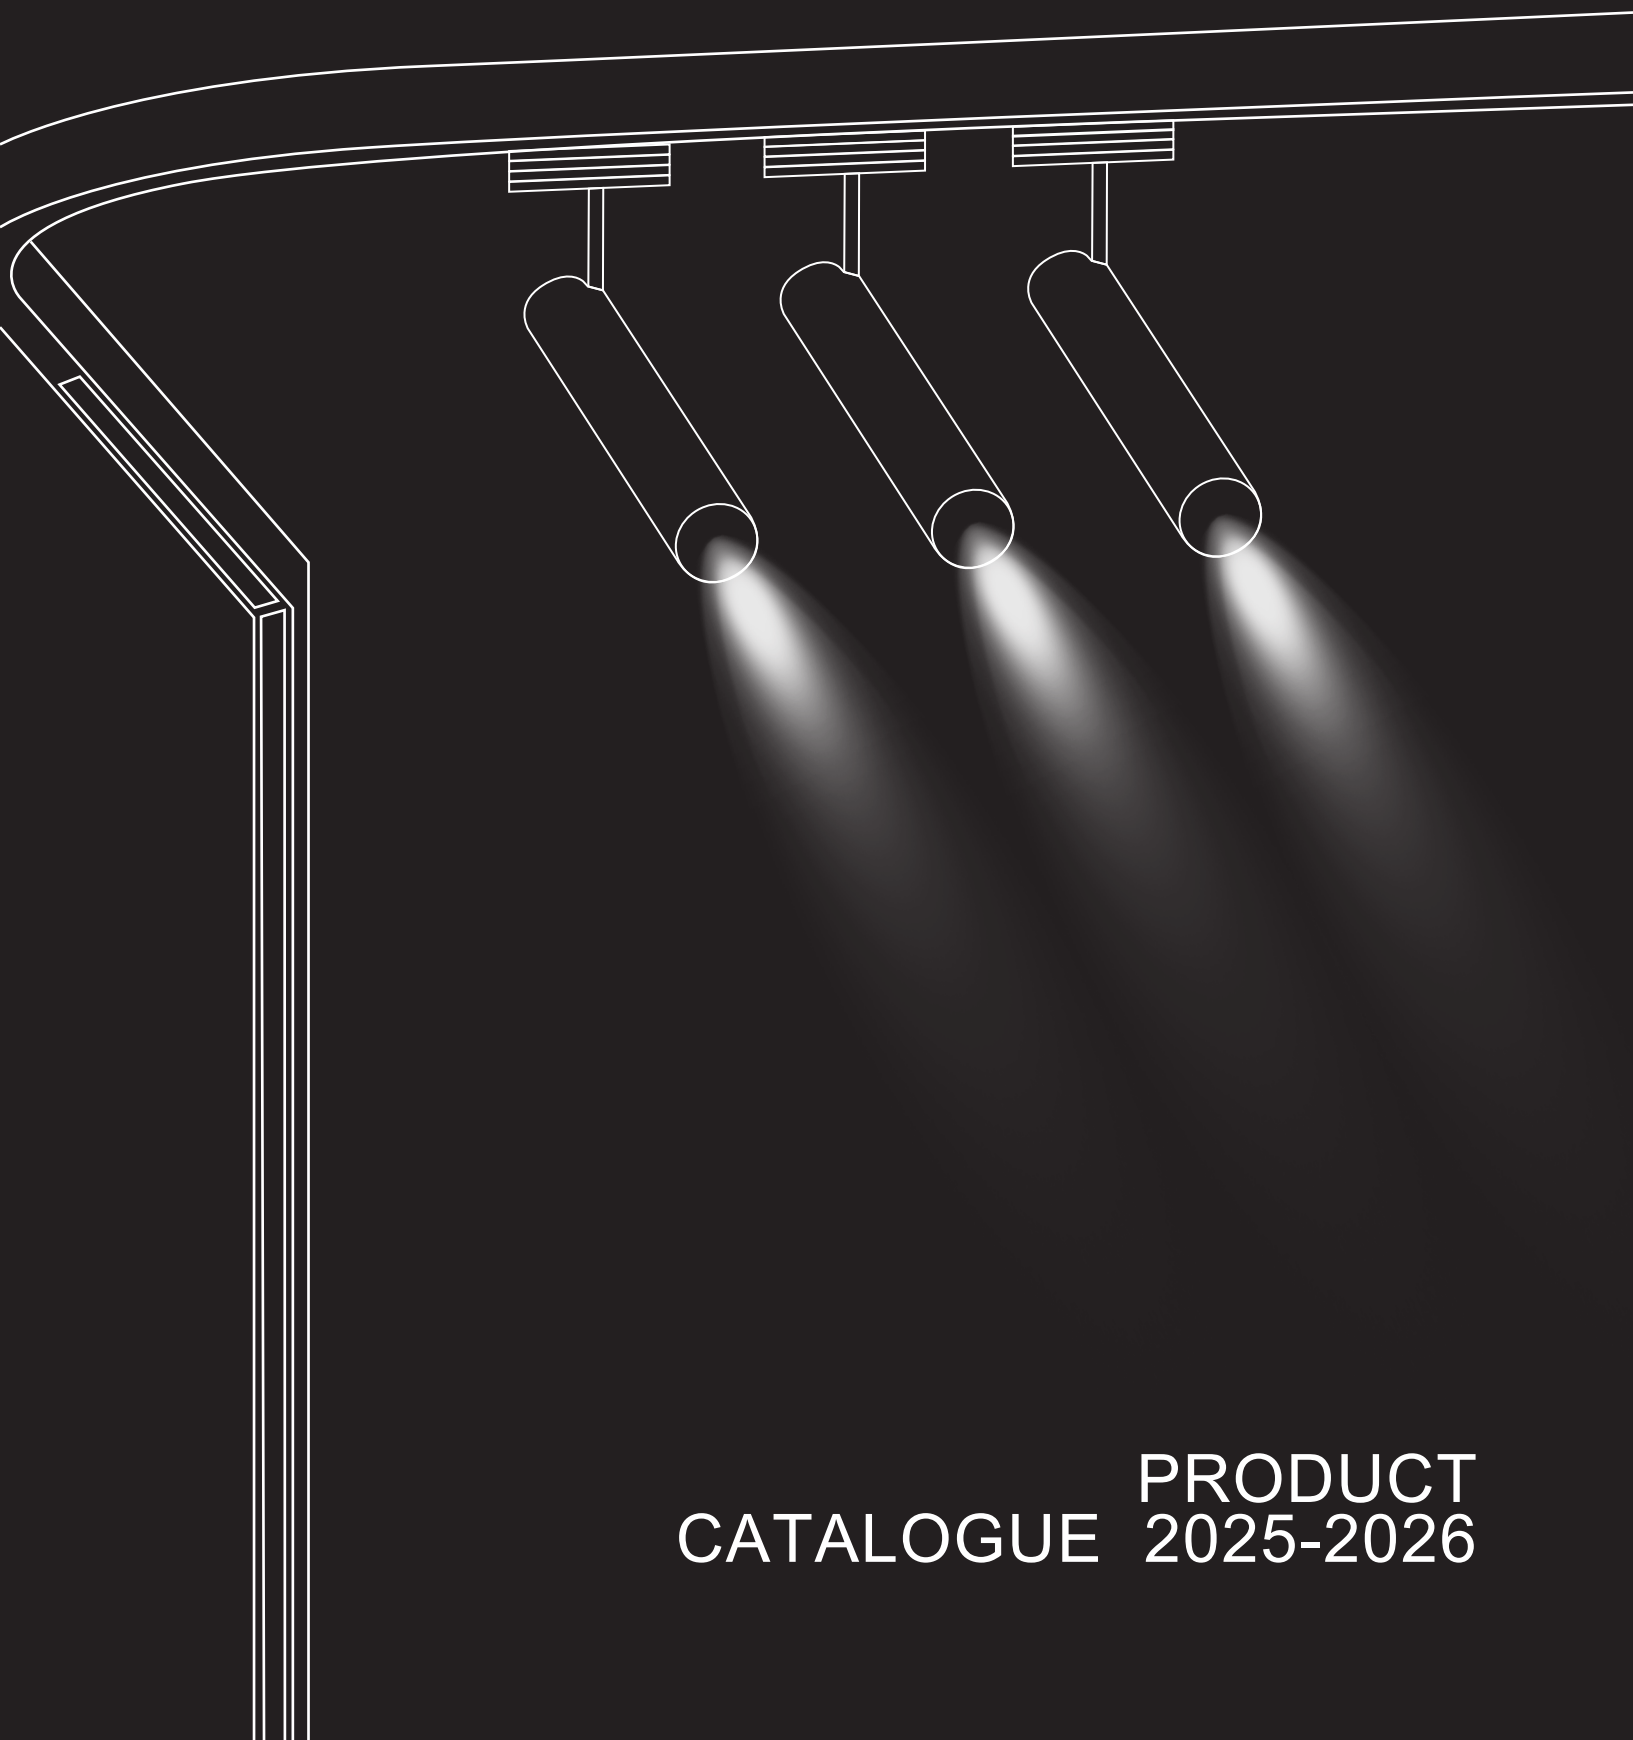

3A
LIGHTING

3A

LIGHT

Company Introduction

3A Lighting, based in Sydney, Australia, has been a dynamic force in the lighting industry since its establishment in 2004. As an importer and wholesaler, the company has made a significant impact by offering a diverse range of light fittings suitable for both residential and commercial applications.

3A Lighting's primary clientele includes retail lighting stores and electrical wholesalers, and despite the highly competitive nature of the industry, the company has experienced rapid growth. This growth can be attributed to their commitment to quality, customer service, and a keen understanding of market trends.

Their product portfolio is expansive, covering everything from interior to exterior LED light fittings, and even ventilation solutions. The range continues to grow, reflecting the company's innovative spirit and dedication to meeting the evolving needs of its customers.


3A Lighting is a young and energetic company, but don't let their youth fool you. They have quickly established themselves as a reliable and trusted provider in the lighting industry, thanks to their strong work ethics and commitment to customer satisfaction.

Products And Services:

LED Lighting: 3A Lighting offers a comprehensive range of LED lighting solutions. Their product line includes LED downlights, panel lights, floodlights, and more. These products are designed for energy efficiency and longevity.

Ventilation Systems: Offers ventilation systems, including exhaust fans and air circulation fans, as part of their comprehensive lighting solutions.

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL9412
P. 002



DL9413
P. 002



DL9520
P. 003



DL9530
P. 004




DL9660
P. 005



DL1270
P. 006



DL1275
P. 006



DL1262
P. 007



DL1362
P. 007



DL1250
P. 008



DL1260
P. 008



DL1365
P. 009



DL1367
P. 009



DL8695
P. 010



DL2018
P. 011




DL2001
P. 011



DL1755
P. 012



DL1297
P. 013



DL1583
P. 014



DL1584
P. 014



DL51 TC
P. 015



DL1071
P. 016



AL5007
P. 017



DL10W-RGB
P. 018



DL1131
P. 019

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL110ECO
P. 020



DL1195
P. 021



DL1196
P. 022



DL1198-PRO
P. 022



DL191
P. 023




DL192
P. 024



DL1194
P. 025



DL1197
P. 026



DL2050
P. 027



Cad01-91 fix
P. 028



DL9417
P. 029



TH21
P. 030



DL1016
P. 031



DL9421
P. 032



DL1560
P. 035



DL1570
P. 035




DL1561
P. 036



DL1571
P. 036



DL1562
P. 037



DL1756
P. 038



DL1757
P. 038



DL9415
P. 039



DL9416
P. 039



DL9454
P. 040



DL9455
P. 040

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL9452
P. 042



DL9453
P. 043



DL9411
P. 044



DLJ103-WH3K10C02
P. 045



DL2005
P. 047



DL3005
P. 047



DL4001
P. 048



DL5001
P. 048



DL106 & DL1019 & DL2009
DL3009 & DL4009 & DL5000
P. 051



AL5006 & AL5008 & AL5009
AL5010 & AL5011
P. 054



DL108 & DL1008
DL2008 & DL3008
P. 056



MD02-5C
P. 057



BL-5CLR-Module
P. 058



MD01-TC
P. 059



Trimless downlight
P. 060



DRFAD01-90
P. 061



DL103
P. 062



SFR006
P. 063




DL2503 & DL3503
P. 064



DLV325 TC
DLV324 TC
P. 065




SFS009-TC
P. 067



DD1010M
P. 069



DD1810M
P. 069



DD2810M
P. 069



DL694002
P. 071

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




DL694005
P. 072



DL6940010
P. 073



DL13
P. 074



DL23
P. 075

LED SURFACE MOUNT DOWN LIGHT SERIES



DL2082 & DL2092 & DL3082
P. 078



DL1066 & DL10196
DL20096 & DL30096
P. 079



DD1541
P. 080



DD1542
P. 081



DL3017
P. 082



DL2034
P. 083




DL2035
P. 083



DL1562
P. 084



TH22
P. 085



DL24
P. 085

LED PENDANTS SERIES



PD1562
P. 087



DL2082P & DL2092P
DL3082P
P. 088

LED TRACK LIGHT SERIES



TH13
P. 091




TH40
P. 091



TH41
P. 092



BJ20
P. 094



BJ30
P. 094



BJ35
P. 094



BJ21
P. 095



BJ31
P. 095



TH19
P. 097



TH30
P. 097



TH25
P. 098



TH1562
P. 098




TH14
P. 099




TH15
P. 099




TH26
P. 100



TH3017
P. 101



DL2035
P. 102



TH11
P. 104



TH16
P. 104



Track-3 wires
P. 105




End Cap & Middle Feed
-3 wires
P. 105




Straight Connector-3 wires
P. 105



Mini Joiner-3 wires
P. 105



L-Feed-L-3 wires
P. 106



L-Feed-R-3 wires
P. 106


LED TRACK LIGHT SERIES




Flexible Connector-3 wires
P. 106




T-Feed-L1-3 wires
P. 106



T-Feed-L2-3 wires
P. 106



T-Feed-R1-3 wires
P. 106



T-Feed-R2-3 wires
P. 107



X-Feed-3 wires
P. 107



Suspension Kit-3 wires
P. 107



Track-4 wires
P. 108



Power Connector&End Cup
-4 wires
P. 109



Straightt Connector-4 wires
P. 109



Suspension Clamp-4 wires
P. 109




Mini Joiner-4 wires
P. 109




Mini Straightt Connector
-4 wires
P. 109



"+" Connector -4 wires
P. 109




"L" Right Container-4 wires
P. 110



"L" Left Container-4 wires
P. 110




T Connector-L1-4 wires
P. 110



T Connector-L2-4 wires
P. 110



T Connector-R1-4 wires
P. 110



T Connector-R2-4 wires
P. 110



Flexible Connector-4 wires
P. 111



Flexible Hard Connector
-4 wires
P. 111



Suspension Kit-4 wires
P. 111

LED MAGNETIC TRACK SYSTEM SERIES



3A-24V-PDYT
P. 117



3A-24V-PDSR
P. 117



3A-24V-PDDK
P. 117



3A-24V-PDGK
P. 117



TPS16-TUYA
P. 117



3A-24VS-LE
P. 117




3A-24VS-I
P. 117




3A-24VS-L
P. 117



3A-24VS-IN
P. 117



3A-24VS-T
P. 117



3A-24VS-X
P. 117




THG16WW-BK12W24V
P. 119




THG16WW-BK12W24V
P. 119




THS16-BK12W24V
P. 120



THD16-BK2X12W24V
P. 120



FGB16-BK6W24V
P. 121



WL16-BK6W24V
P. 121

LED MAGNETIC TRACK LIGHT SERIES



MTRS601010
P. 125



MLSJ601901
P. 125



MTH6012011
P. 126



MTHP601241
P. 126



MTHS601211
P. 127

LED MAGNETIC TRACK LIGHT SERIES




MTHSA601251
P. 127

LED LINEAR LIGHT SERIES




LLR550M
P. 132




LL1200M/LL1800M
P. 132

LED PANEL SERIES



LPB3060-WHTC18
P. 135




LPB6060-WHTC40
P. 135



LPB3012-WHTC40
P. 135



LPB6012-WHTC72
P. 135



LPB NEW 36W-6000K
P. 136



FR3060-WH
P. 137



FR6060-WH
P. 137



FR3012-WH
P. 137



FR6012-WH
P. 137



FS3060-WH
P. 138



FS6060-WH
P. 138



FS3012-WH
P. 138



FS6012-WH
P. 138

LED CEILING LIGHT SERIES



AC1011-WHTC
P. 140



AC1014-LED
P. 141



AC1020
P. 142



AC9001
P. 143



AC9002
P. 144




AC1013-TC30EMS
P. 145



AC9004-WHTC
P. 146




AC1015-WHTC
15S15/18S15/30S15
P. 147



AC1001/WB
P. 148



AC1001/30 & AC1001/40
AC1001/50
P. 148



AC1002/WB
P. 148




AC1002/30 & AC1002/40
P. 148


LED STRIP AND DRIVER SECTION



STRIP/RF-SMD05
RFCCT 5M DC24V
P. 150



STRIP/SMD01 SMD02
P. 151



STRIP/TY-SMD03
P. 152



STP-COB-14W-24V-320D
3K/4K/6K-5M/10M
P. 153



STP-COB-6W-24V-320D
P. 154



STP-COB-6W-24V-320D
3K/4K/5K-5M-IP20
P. 155



STP-COB-6W-24V-320D
3K/4K/5K-10M-IP20
P. 156



14W 3A-COB-24V-320D
P08-WW/DW/CW/50M
P. 157




10W 3A-COB-24V-480D
WW/DW/PW
P. 158




9.6W 3A-COB-24V-480D
WW/DW/5M/10M
P. 159

LED STRIP AND DRIVER SERIES



15W 3A-COB-24V
480D-RGB/5M
P. 160



4MM PCB 6W 3A-COB-24V
480D-P04/WW/DW/5M
P. 161



9W FREE CUT 3A-COB-24V
480D-P08-CF-WW/DW/50M
P. 162



20W 3A-COB-24V-1920D
WW/DW/CW-10M
P. 163




15W 3A-COB-12V-576D
RGB/10M
P. 164



3A-1506B
P. 165



3A-1708A
P. 166



3A-2020C
P. 167



3A-5213
P. 168



3A-5035A
P. 169



3A-6060
P. 170



3A-3512
P. 171



0.75m² SAA 3A-AU PLUG
P. 172




3A-DR-CV-20/30/60/80/100/
150/200-24 with AU Plug
P. 173



3A-OTM-W300-24
with AU Plug
P. 174



KS65DU-2400250
with AU Plug
P. 175




KS100DU-2400400
with AU Plug
P. 176




KS65DU-2400250
with AU Plug
P. 177




3A-BCI-N8BB-2
P. 178



3A-BCI-N8XB-2
P. 178




3A-BCI-N8BXB-2
P. 178




3A-BCI-N8-2L
P. 178



3A-BCI-N10BB-2
P. 179




3A-BCI-N10XB-2
P. 179




3A-BCI-N10BXB-2
P. 179

LED STRIP AND DRIVER SERIES



3A-BCI-N10-2L
P. 179



3A-BCI-N10-3/4L
P. 180



3A-BCI-N10XB-4
P. 180



3A-BCI-N10XB-4
P. 180



LED Stair Induction
P. 181



Q4 12V 20W
P. 182



Q8H-12V-40W
P. 182



Q8H-12V-75W
P. 182



DR-40W 24V Q8H
P. 182



36W STRIP DRIVER
P. 182



72W STRIP DRIVER
P. 182



V6-40-12V
P. 183



V6-100-12V
P. 183



V6-200-12V
P. 183



V6-200-24V
P. 183



ELG-240-36A
P. 184



HLG-600H-24A
P. 185



LPV-150-12
P. 186



XLG-25-A
P. 187



XLG-75-12-A
P. 188



XLG-100-12
P. 189



XLG-150-12
P. 190



XLG-320-V-A
P. 191



10-220-240-250
P. 192



12-220-240-300
P. 193

LED STRIP AND DRIVER SERIES



12-220-240-300CS
P. 194



40-220-240-1A0
P. 195



40-220-240-1A0 CS T-B
P. 196



40-220-240-1A0 CS T-W
P. 197




42-220-240-1050 CS
P. 198

LED NEON LIGHT SERIES




M1615D-TOP
P. 200



3A-Neon-SB-
1625D-WW/NW
P. 201

LED FLOOR LIGHT SERIES



FL35150
P. 203


LED HIGH BAY LIGHT SERIES




HB-A-VT-80W/120W/150W
P. 205




HB-A-VT-150W
P. 205



KD007-BKTCTP
P. 206



KD007-BK6K150
P. 207



KD007-BK6K200
P. 207



KD007-BK6K100L120
P. 208



KD008-BKTCTP100-60
KD008-BKTCTP150-100
P. 209



KD008-BKTCTP200-100
KD008-BKTCTP300-200
P. 210

LED FLOOD LIGHT SERIES



FL03-C-200W/
FL03-C-BKTCTP500-300
P. 212-213



FLLG155C-BKTC
20/30/50/100
P. 214-215



FLLG158S-BKTC30PIR
FLLG158S-BKTC50PIR
P. 216

LED STREET LIGHT SERIES



SL-A-100W
P. 218

LED OUTDOOR LIGHT SERIES



2122
P. 220




2132
P. 220



2116
P. 221



2123
P. 222



2133
P. 222



2112
P. 223



2121
P. 224



2131
P. 224



2114
P. 224



146A+C EX
P. 225



146B+C EX
P. 225



146C+C EX
P. 225



146B+C-GUSEN
P. 226



146C+C-GUSEN
P. 227



2142
P. 228



2143
P. 228



2144
P. 228



2124
P. 229



2134
P. 230



2150
P. 231



251
P. 232



252
P. 232



253
P. 233




ST151
P. 234



ST152
P. 235

LED OUTDOOR LIGHT SERIES



ST153
P. 236



ST2153
P. 237



21191
P. 238



21192
P. 239




ST11506-1W-350
P. 240



ST11506-1W-600
P. 240



ST11509-1W-350
P. 241



ST11510-1W-420
P. 241



3121
P. 242



3311
P. 242



3222
P. 242



3131-BK12V
P. 243




3312-SS12V
P. 243




3132-BK12V
P. 243



3313-SS12V
P. 243



CD75C02C
P. 244




CD3502
P. 245




341-BK
P. 246



F35002/1
P. 247



ST5089
P. 248



ST5090
P. 249



ST5161
P. 250



ST5163
P. 250



ST712
P. 251



ST714-450
P. 251

LED OUTDOOR LIGHT SERIES



ST714-1000
P. 251



ST5022
P. 252



ST5023
P. 252



ST5021
P. 253



ST5024
P. 253



ST5025
P. 253



ST258
P. 254



ST259
P. 255



ST367
P. 256



ST368
P. 257



ST354
P. 258



ST365
P. 258



ST362
P. 259



ST363
P. 260



W13141
P. 261



W13142
P. 262



W13143
P. 263



ST18209
P. 264



ST19307
P. 264



ST2929
P. 265




2324
P. 266



3601
P. 266



AL5608
P. 267



257AL-2
P. 268



256AL-2
P. 268

LED OUTDOOR LIGHT SERIES



2562
P. 268



257AL
P. 269



2571
P. 269



256AL
P. 269



2561
P. 269



79B001
P. 270



79B053
P. 270




ST6050
P. 271



SA031
P. 272




BL3003
P. 273




W11286
P. 274




ST254
P. 275




DW13532
P. 276



DW13531
P. 276



ST136
P. 277



ST137
P. 278



W13151
P. 279



ST60
P. 280



ST61
P. 281



ST80
P. 282



ST81
P. 283



ST100
P. 284



WL13301
P. 285



WL31001
P. 286



WL31004
P. 287

LED OUTDOOR LIGHT SERIES



WL31031
P. 288



ST13305
P. 289



ST13306
P. 289



ST13307
P. 289




2356
P. 290



2360
P. 291



2361
P. 291



421
P. 292



411-2
P. 292



411-4
P. 293



831
P. 294



831A
P. 294



5111
P. 295



UL713-MR16
P. 295



BL142
P. 296



BL145
P. 296



WX6015TC
P. 297



WX6016TC
P. 297



WX6015-TC15SEN
P. 298



WX4011
P. 299



WX4017
P. 299



WX4018
P. 299



WX4019
P. 299



WX4026
P. 299



WX4028
P. 299

LED STEP LIGHT SERIES



ST511
P. 301



STEP-512 TC
P. 302



STEP-513 TC
P. 302



STEP-514 TC
P. 302



STEP-518 TC
P. 302



STEP-515 TC
P. 303




STEP-516 TC
P. 303




STEP-517 TC
P. 303




STEP-519 TC
P. 303



3A-C092-1
P. 305



3A-C092-2
P. 305



3A-C092-3
P. 305

CEILING FAN BATHROOM HEATER SERIES



CEILING FAN-Remote
Control
P. 307



3AH2E125D10
P. 308



3AH4E125D10
P. 308



SBH2
P. 309



SBH4
P. 309



H200-7-WH
P. 310



H200-7L-WH
P. 310



H200-9-WH
P. 310



H200-9L-WH
P. 310



H250-7-WH
P. 311

CEILING FAN BATHROOM HEATER SERIES




H250-9-WH
P. 311



H250-7L-WH
P. 312



H250-9L-WH
P. 312



H200-16-WH
P. 313



H200-17-WH
P. 313



H250-16-WH
P. 314



H250-17-WH
P. 314



3A1HB10EBP
P. 315



H200-15L & H250-15L
P. 316

CEILING FAN SERIES



MP1248-4
P. 318



MP1248-E27-4
P. 319



MP1248-LED-4
P. 320



FDC2248/FDC2352/
FDC2356
P. 321

LED GLOBES SERIES



GU10
P. 323



LED-A60-11W
P. 324



LED-A60-11W-TC
P. 324



LED-T40-9W
P. 324



GU10-8W
P. 325

LED GLOBES SERIES




MR16-5W
P. 325



A60B22-WHSMART11W
P. 326



A60E27-WHSMART11W
P. 326



GLOBE/ SMART 5W
GU10 RGB CCT
P. 327




PAR20 7W
P. 328



PAR30 9W
P. 328



PAR38 18W
P. 328



LBR63 & LBR80
P. 329



HEAT LAMP 275W
P. 330



LT600-9W6500K
LT1200-18W6500K
P. 331



C35E14
P. 332



C35E27
P. 332



G45E14
P. 333



G45E27
P. 333



G95
P. 334



G125
P. 335



ST64
P. 336

LED BATTEN LIGHT SERIES



BT20-TC20
BT40-TCTP203040
P. 338



LED/BT-22-DL
P. 339



BT20-TC20S
BT40-TC40S
P. 340



BT 34-18W-600
BT 34-36W-1200
P. 341



ARC600-TC25
ARC1200-TC40
P. 342

LED BATTEN LIGHT SERIES



LS600-TC18
LS1200-TC36
P. 343



DPB07-WP-CW-22W
DPB13-WP-CW-45W
P. 344



VP2032-TC12
P. 345




SP110PS-WH6K9
SP120PS-WH6K18
P. 346



SP210PS-WH6K2X9
SP220PS-WH6K2X18
P. 346



SP110WG-WH6K9
SP120WG-WH6K18
P. 347



SP210WG-WH6K2X9
SP220WG-WH6K2X18
P. 347



SP210WG-WH6K2X9SEN
SP220WG-WH6K2X18SEN
P. 348



DPB118WPNB-9
DPB136WPNB-18
P. 349



DPB218WPNB-2X9
DPB236WPNB-2X18
P. 349



DPB218WPWB-2X9
DPB236WPWB-2X18
P. 350



SP210WP-TC18W
SP220WP-TC36W
P. 351



SP220WP-TC36WSEN
P. 352



BT41-TCTP203040
P. 353



BT22-TCTP101520
P. 354




BT42-TCTP203040
P. 355




BT44-TCTP203040
P. 356

SECURITY LIGHT AND SENSOR SERIES




AC4203
P. 358




AC4202
P. 358



AC4206
P. 359




AC4205
P. 359



ES-B06B
P. 360

SECURITY LIGHT AND SENSOR SERIES



ES-B06W
P. 360



ST09
P. 361



ST19
P. 361



ST05C
P. 361



ST765
P. 361



ST41C
P. 361



DIM-400
P. 362



DIM-TOUCH(350VA)
P. 362

LED EMERGENCIES LIGHT SERIES



SP2001
P. 364



SP2002
P. 365



SP2003
P. 365



SP-3001
P. 366



SP-3002
P. 366



SP1001
P. 367



SP210PS-WH6K2X9EM
P. 368



SP120PS-WH6K18EM
P. 368



SP220PS-WH6K2X18EM
P. 368



SP210WG-WH6K2X9EM
P. 369



SP120WG-WH6K18EM
P. 369



SP220WG-WH6K2X18EM
P. 369



SP210WG-WH6K2X9SEENEM
P. 370



SP220WG-WH6K2X18SEENEM
P. 370



SP210WP-TC18WEM
P. 371

LED EMERGENCIES LIGHT SERIES



SP220WP-TC36WEM
P. 371



SP220WP-TC36WEMSEN
P. 372



WP ENCLOSURE
P. 373




SPTTEST
P. 374

ACCESSORIES



GU10LP
P. 376



B12LP
P. 376



GU10 to MR16 CONVERTER
P. 376



SOCKET
P. 376




QUICK SOCKET
P. 376



150MM ADAPTOR
P. 376



S9913
P. 376

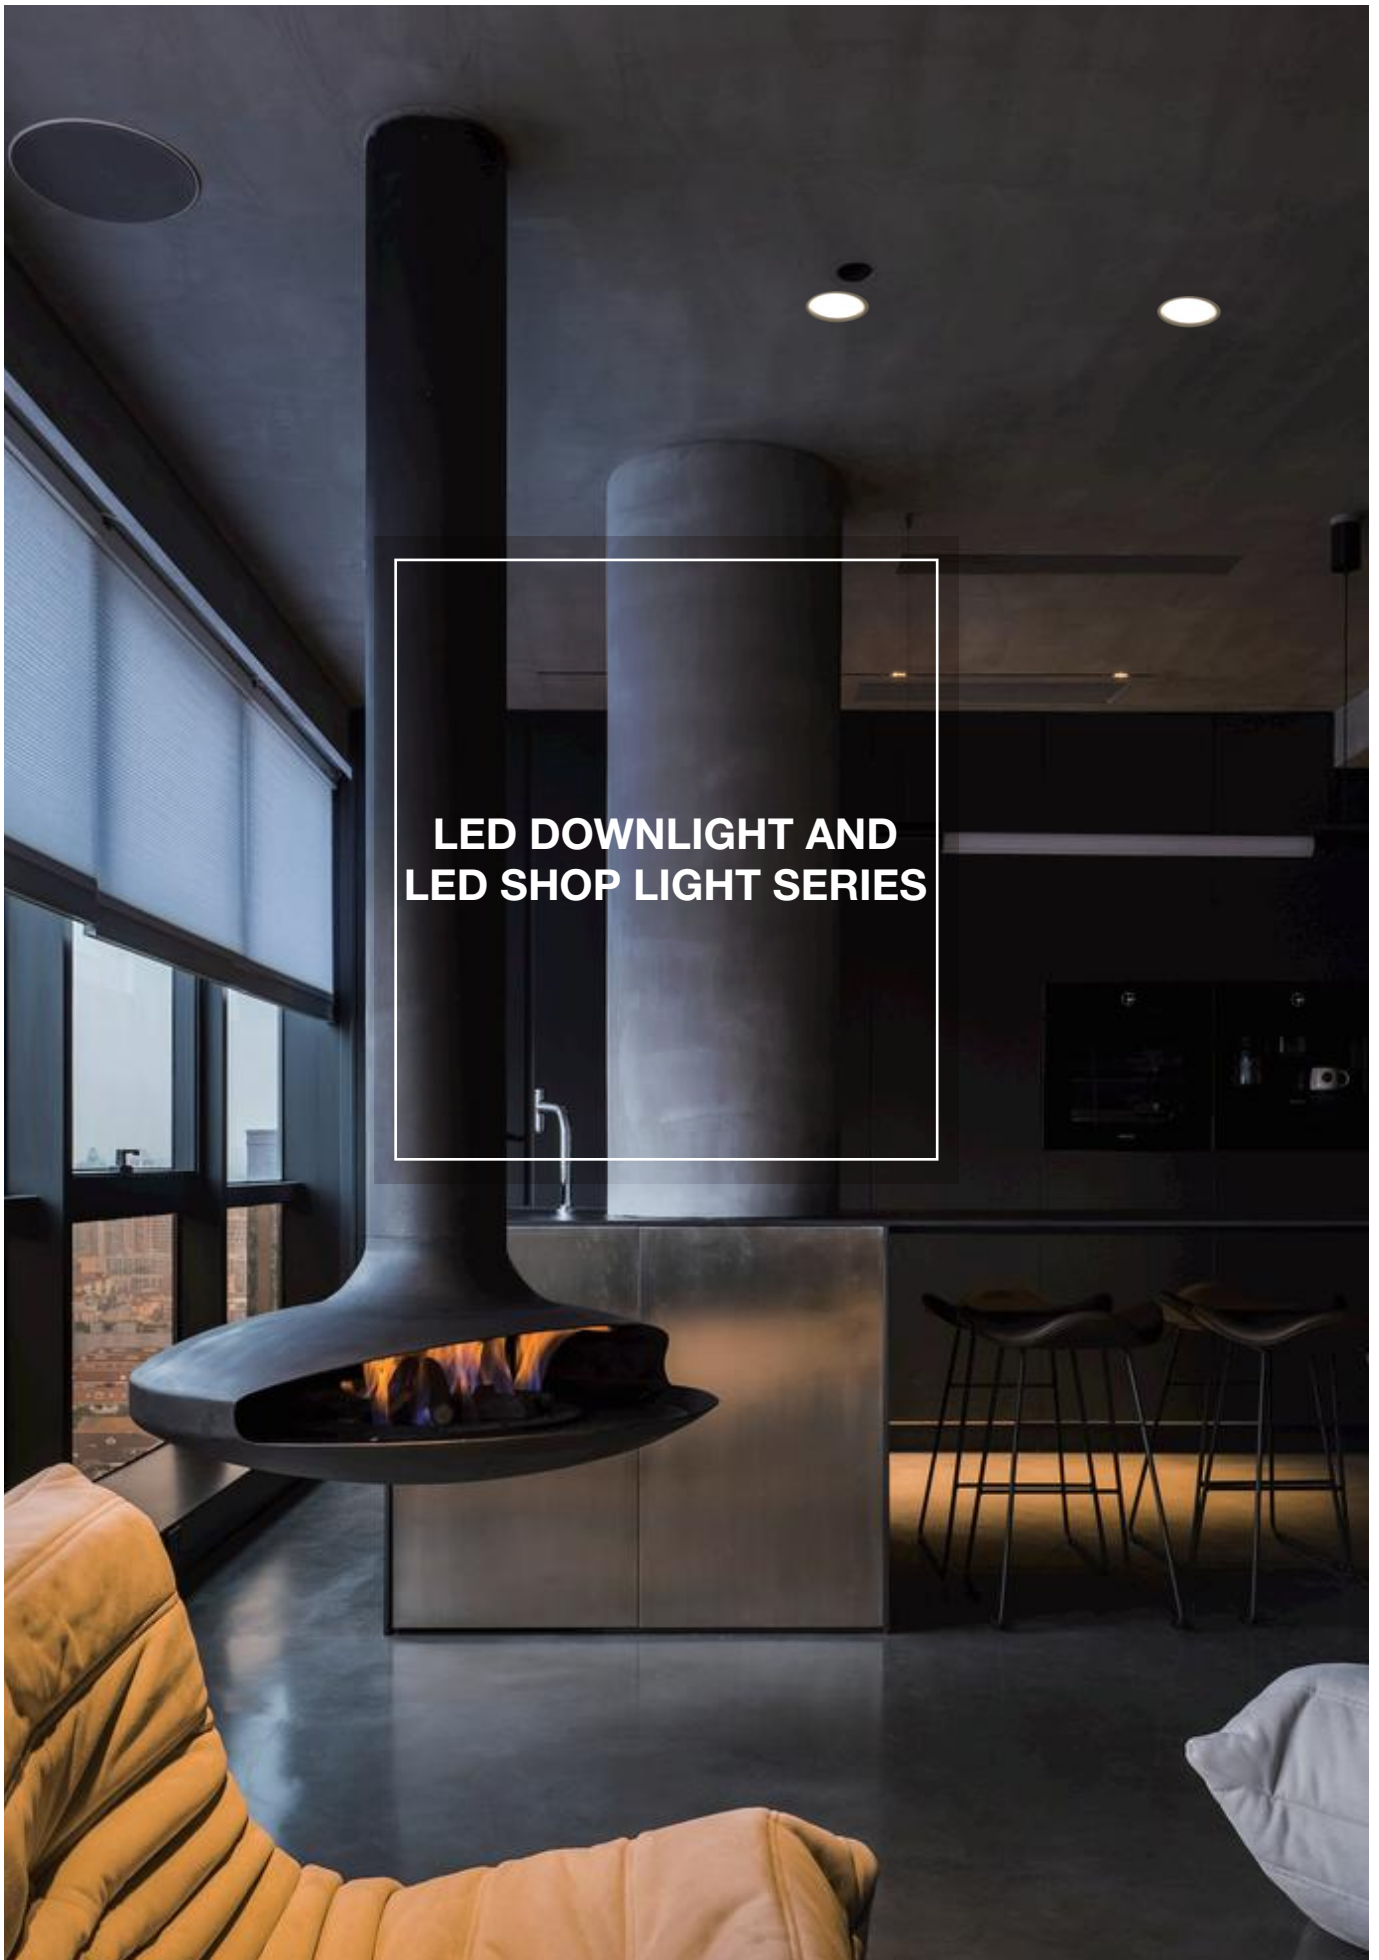


LED DOWNLIGHT AND LED SHOP LIGHT SERIES



Product Features

- Dimmable with trailing edge and universal dimmer dimmable range 3%-100%
- High efficiency LED chip and translucent diffuser
- Easy installation
- DALI Optional
- C BUS 2 Compatible
- Aluminum heatsink
- Separate driver
- 3 years replacement warranty

Dimensions

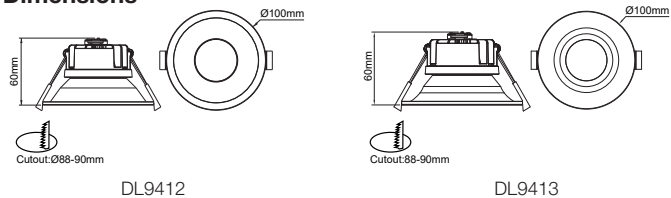

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Chip	Packaging	Dimensions
DL9412-WHTC10S03	9360338000907	10W	731-844lm	Ø100*60mm	88-90mm	WH	Die-cat Aluminum	60°	3000K/4000K/5000K	SMD	30 PCS/CTN	380*260*375 mm
DL9412-BKTC10S03	9360338000914	10W	731-844lm	Ø100*60mm	88-90mm	BK	Die-cat Aluminum	60°	3000K/4000K/5000K	SMD	30 PCS/CTN	380*260*375 mm
DL9413-WHTC10C03	9360338000921	10W	670-770lm	Ø100*60mm	88-90mm	WH	Die-cat Aluminum	60°	3000K/4000K/5000K	COB	30 PCS/CTN	380*260*375 mm
DL9413-BKTC10C03	9360338000938	10W	670-770lm	Ø100*60mm	88-90mm	BK	Die-cat Aluminum	60°	3000K/4000K/5000K	COB	30 PCS/CTN	380*260*375 mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL9520


 White  Matt black



Product Features

- Dimmable with leading and trailing edge phase cut dimmers
- Long lifespan average 40,000 hours
- 5-CCT changeable
- With flex and plug for easy installation
- DALI Optional
- C BUS 2 Compatible
- Aluminum heatsink
- Separate driver
- 5 years replacement warranty

Dimensions



DL9520

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	△	CCT		
DL9520-WH5C10C03	9360338001058	10W	649-685lm	Ø88.6*H62.4mm	Ø80mm	WH	Die-cat Aluminum	60°	2700K/3000K/4000K/5000K/5700K30	PCS/CTN	595*365*225 mm
DL9520-BK5C10C03	9360338001065	10W	649-685lm	Ø88.6*H62.4mm	Ø80mm	BK	Die-cat Aluminum	60°	2700K/3000K/4000K/5000K/5700K30	PCS/CTN	595*265*225 mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL9530



White




Matt black



Product Features

- UltraLong lifespan average 40,000 Hrs
- C BUS2 Compatible
- Original CREE COB LED chip with dimmable driver
- Fitted with flex and plug for ease of installation
- It can replace 75W halogens. Ultra-low energy consumption, high optical property
- DALI Optional
- Aluminum heatsink
- Separate driver
- Adjustable angle 25°
- 3 years replacement warranty

Dimensions



DL9530

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	PCS/CTN	Box Size
DL9530-WH3K13C03	9360338000228	13W	1220-1240lm	Ø100*H102.5mm	90-92mm	WH	Die-cat Aluminum	60°	3000K	36 PCS/CTN	500*380*505mm
DL9530-WH4K13C03	9360338000235	13W	1220-1240lm	Ø100*H102.5mm	90-92mm	WH	Die-cat Aluminum	60°	4000K	36 PCS/CTN	500*380*505mm
DL9530-BK3K13C03	9360338000242	13W	1220-1240lm	Ø100*H102.5mm	90-92mm	BK	Die-cat Aluminum	60°	3000K	36 PCS/CTN	500*380*505mm
DL9530-BK4K13C03	9360338000259	13W	1220-1240lm	Ø100*H102.5mm	90-92mm	BK	Die-cat Aluminum	60°	4000K	36 PCS/CTN	500*380*505mm


LED DOWNLIGHT AND LED SHOP LIGHT SERIES



Product Features

- Original CREE COB LED chip with dimmable driver (IC from USA)
- Fitted with flex and plug for ease of installation
- Big range of cutout size (70-100mm) for different replacment.
- Anti-glare solution with soft & comfort light
- 3 years replacement warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box
DL9660-WHTC13C01	9360338001140	13W	1000lm	Ø110*H67mm	70-100mm	WH	Die-cat Aluminum	60°	3000K/4000K/5000K	50 PCS/CTN	640*640*325mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL1270




DL1275



Product Features

- 3-CCT Changeable
- Compatible with leading and trailing edge phase cut dimmers
- Commercial grade quality and design
- DALI Optional
- C BUS 2 Compatible
- Aluminum heatsink
- Separate driver
- 5 years replacement warranty

Dimensions

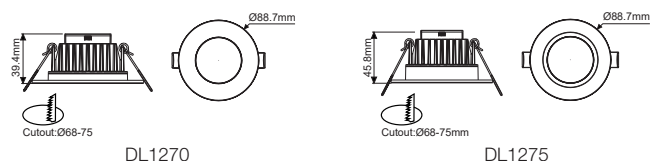


DL1270

DL1275

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1270-WHTC10501	9360338000006	10W	615-713lm	Ø88.7*H39.4mm	Ø68-75mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*175mm
DL1270-SCTC10501	9360338000013	10W	615-713lm	Ø88.7*H39.4mm	Ø68-75mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*175mm
DL1270-BKTC10501	9360338000020	10W	615-713lm	Ø88.7*H39.4mm	Ø68-75mm	BK	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*175mm
DL1275-WHTC10502	9360338000037	10W	579-679lm	Ø88.7*H45.8mm	Ø68-75mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*200mm
DL1275-SCTC10502	9360338000044	10W	579-679lm	Ø88.7*H45.8mm	Ø68-75mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*200mm
DL1275-BKTC10502	9360338000051	10W	579-679lm	Ø88.7*H45.8mm	Ø68-75mm	BK	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*200mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES

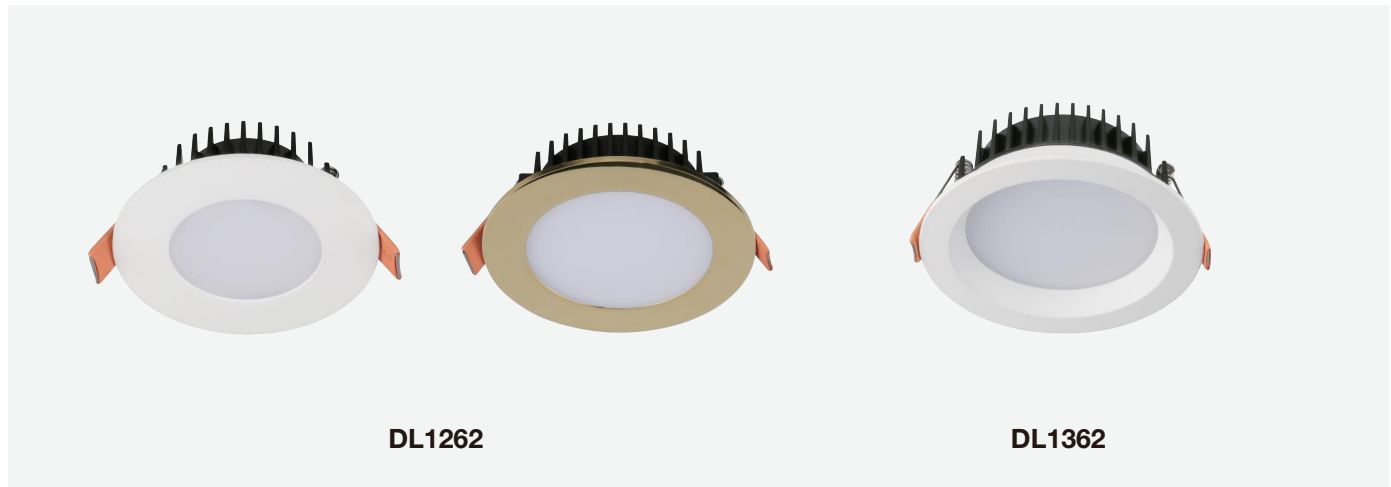

 White
  Black
  Chrome
  Golden


 White
  Black
  Chrome



Product Features

- 3-CCT Changeable
- Compatible with leading and trailing edge phase cut dimmers
- Commercial grade quality and design
- DALI Optional
- C BUS 2 Compatible
- Aluminum heatsink
- Separate driver
- 5 years replacement warranty

Dimensions

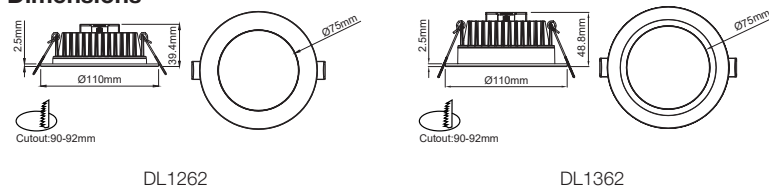

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1262-WHTC12S01	9360338000068	12W	800-900lm	Ø110*H39.4mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1262-BKTC12S01	9360338000082	12W	800-900lm	Ø110*H39.4mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1262-SCTC12S01	9360338000075	12W	800-900lm	Ø110*H39.4mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1262-GDTC12S01	9360338000099	12W	800-900lm	Ø110*H39.4mm	Ø90-100mm	GD	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1362-WHTC13S02	9360338000105	13W	800-900lm	Ø110*H48.8mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1362-SCTC13S02	9360338000112	13W	800-900lm	Ø110*H48.8mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm
DL1362-BKTC13S02	9360338000129	13W	800-900lm	Ø110*H48.8mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5700K	30 PCS/CTN	595*365*215mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL1250



DL1260




Product Features

- Selectable colour temperature by wall switch
- Polycarbonate body
- Remote constant current dimmable LED driver with flex&plug
- Not compatible with touch dimmer
- Easy operation to setting and memory color temperatur
- Long life span >40,000 Hrs
- 3 Years replacement warranty

Application

- Residential
- Commercial area (eg reception area, hotel and shops)


Dimensions

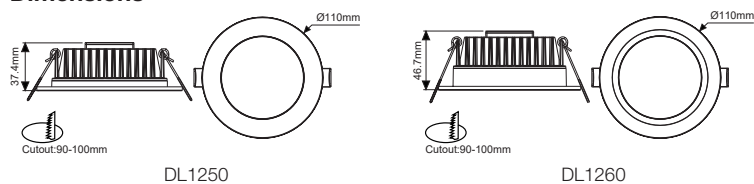

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1250-WHTC12S01	9360338000266	12W	791-876lm	Ø110*H37.4mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm
DL1250-SCTC12S01	9360338000273	12W	791-876lm	Ø110*H37.4mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm
DL1250-BKTC12S01	9360338000280	12W	791-876lm	Ø110*H37.4mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm
DL1260-WHTC13S02	9360338000297	12W	775-860lm	Ø110*H46.7mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm
DL1260-SCTC13S02	9360338000303	12W	775-860lm	Ø110*H46.7mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm
DL1260-BKTC13S02	9360338000310	12W	775-860lm	Ø110*H46.7mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	595*365*215mm


LED DOWNLIGHT AND LED SHOP LIGHT SERIES

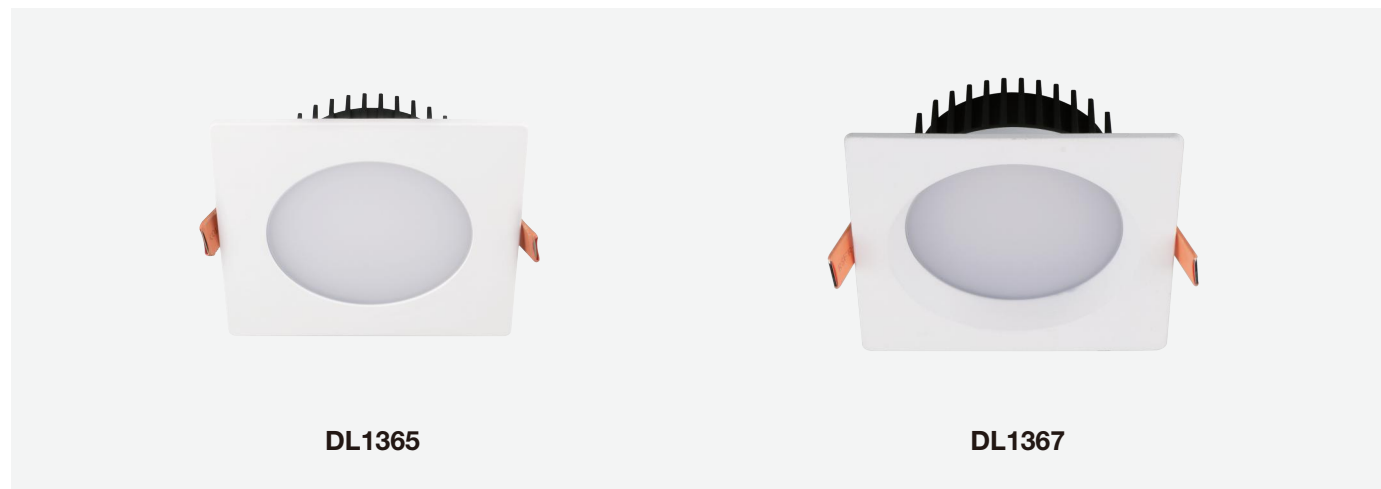

Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- 3 Years Replacement Warranty

Dimensions

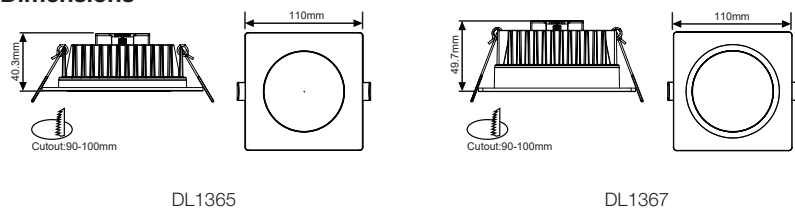

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Box Size
DL1365-WHTC10S01S	9360338000808	10W	829-921lm	110*110*40.3mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm
DL1365-BKTC10S01S	9360338000822	10W	829-921lm	110*110*40.3mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm
DL1365-SCTC10S01S	9360338000815	10W	829-921lm	110*110*40.3mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm
DL1367-WHTC12S02S	9360338000839	12W	808-900lm	110*110*49.7mm	Ø90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm
DL1367-BKTC12S02S	9360338000846	12W	808-900lm	110*110*49.7mm	Ø90-100mm	BK	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm
DL1367-SCTC12S02S	9360338000853	12W	808-900lm	110*110*49.7mm	Ø90-100mm	SCH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	600*425*210mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




DL8695



Product Features

- C-Bus2 compatible
- Gimbal adjustable Aluminum fitting 30° tilt
- Commercial grade quality and design
- Tricolour WW/CW/DL
- Made with Lm80 certified SMD LED chips
- Long Life span with low power consumption - Include remote dimmable driver and Australian plug
- 3 Years replacement warranty
- Dali dimming optional

Dimensions

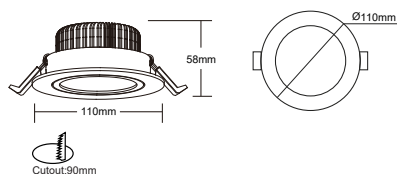


DL8695

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL8695-WHTC15S01	9360338000150	15W	1000-1100lm	Ø110*58mm	90mm	WH	Die-cat Aluminum	90°	3000K/4000K/5000K	30 PCS/CTN	600*245*335 mm
DL8695-SCHTC15S01	9360338000167	15W	1000-1100lm	Ø110*58mm	90mm	SCH	Die-cat Aluminum	90°	3000K/4000K/5000K	30 PCS/CTN	600*245*335 mm
DL8695-BKTC15S01	9360338000174	15W	1000-1100lm	Ø110*58mm	90mm	BK	Die-cat Aluminum	90°	3000K/4000K/5000K	30 PCS/CTN	600*245*335 mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES

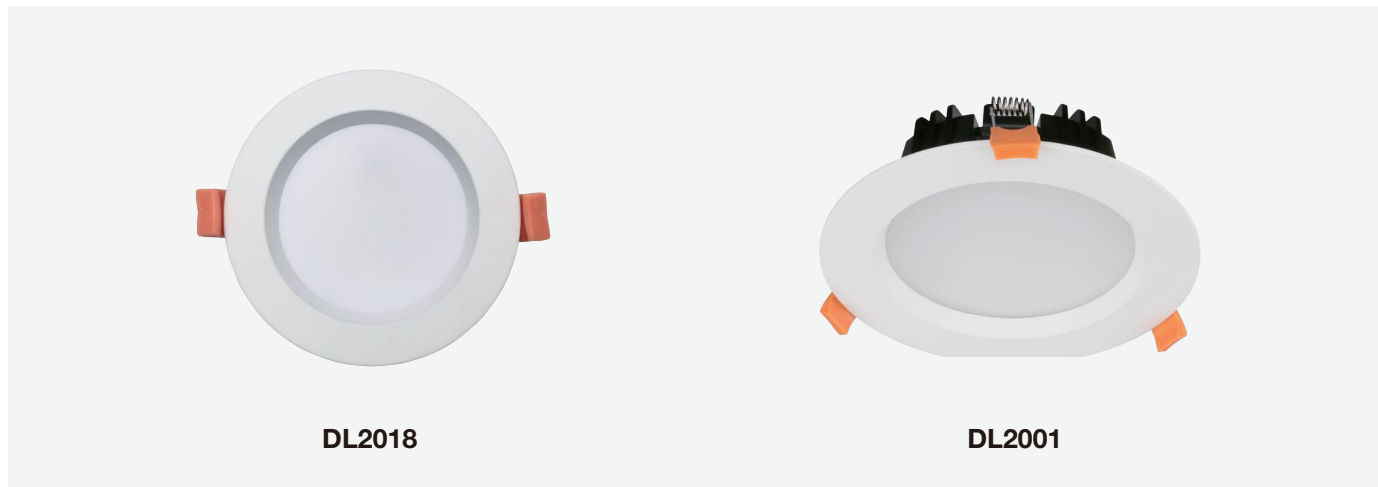

DL2018


DL2001



Product Features

- C-BUS2 compatible
- DALI optional
- Aluminum heatsink
- Dimmable with trailing edge and universal dimmer
- With separate driver and Australian standard plug
- 5 years replacement warranty

Dimensions

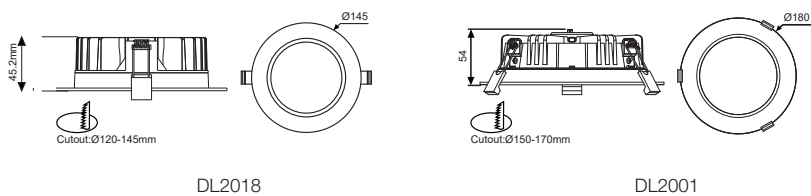

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL2018-WHTC18S02	9360338000686	18W	1330-1510lm	Ø145*H45.2mm	120-145mm	WH	Die-cast Aluminum	90°	3000K/4000K/5000K	20 PCS/CTN	355*355*530mm
DL2018-BKTC18S02	9360338000693	18W	1330-1510lm	Ø145*H45.2mm	120-145mm	BK	Die-cast Aluminum	90°	3000K/4000K/5000K	20 PCS/CTN	355*355*530mm
DL2001-WHTC20S02	9360338000709	20W	1780-1890lm	Ø180*H54mm	150-170mm	WH	Die-cast Aluminum	90°	3000K/4000K/5000K	20 PCS/CTN	445*445*435mm
DL2001-BKTC20S02	9360338000716	20W	1780-1890lm	Ø180*H54mm	150-170mm	BK	Die-cast Aluminum	90°	3000K/4000K/5000K	20 PCS/CTN	445*445*435mm


LED DOWNLIGHT AND LED SHOP LIGHT SERIES



Product Features

- Dimmable with trailing edge and universal dimmer
- DALI Optional
- Aluminum heatsink
- C-bus2 compatible
- Adopt anti-glare diffuser
- Made with LM-80 certified COB LED chips
- 3 years replacement warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1755-WHTC13C02	9360338000587	13W	1000-1050lm	Ø110*40.5mm	90mm	WH	Die-cast Aluminum	90°	3000K/4000K/5000K	30 PCS/CTN	595*365*105mm
DL1755-BKTC13C02	9360338000594	13W	1000-1050lm	Ø110*40.5mm	90mm	BK	Die-cast Aluminum	90°	3000K/4000K/5000K	30 PCS/CTN	595*365*105mm


LED DOWNLIGHT AND LED SHOP LIGHT SERIES



Product Features

- 3CCT Changeable
- Dimmable with leading and trailing edge ohase cut dimmers
- 3 years replacement warranty

Dimensions

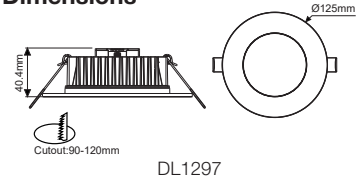

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1297-WHTC15S01	9360338009559	15W	1098-1168lm	Ø125*H40.4mm	Ø90-120mm	WH	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	405*275*500mm
DL1297-BKTC15S01	9360338009566	15W	1098-1168lm	Ø125*H40.4mm	Ø90-120mm	BK	Die-cat Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	405*275*500mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL1583




DL1584



Product Features

- 3CCT Changeable(DL1583)
- 5CCT Changeable(DL1584)
- DALI Optional
- C BUS 2 Compatible
- Aluminum heatsink
- Separate driver
- 5 years warranty

Dimensions

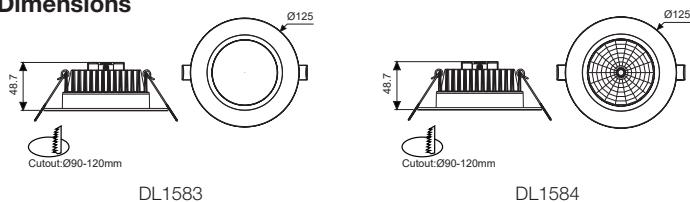

DL1583

DL1584

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging
DL1583-WHTC15S029360338000525	15W	1000-1200lm	Ø125*H48.7mm	Ø90-120mm	WH	Die-cast Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	675*410*210mm
DL1583-SCTC15S029360338000532	15W	1000-1200lm	Ø125*H48.7mm	Ø90-120mm	SCH	Die-cast Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	675*410*210mm
DL1583-BKTC15S029360338000549	15W	1000-1200lm	Ø125*H48.7mm	Ø90-120mm	BK	Die-cast Aluminum	100°	3000K/4000K/5000K	30 PCS/CTN	675*410*210mm
DL1584-WHTC15C029360338000556	15W	1098-1168lm	Ø125*H48.7mm	Ø90-120mm	WH	Die-cast Aluminum	100°	2700K/3000K/4000K/5000K/5700K	30 PCS/CTN	675*410*210mm
DL1584-BKTC15C029360338000570	15W	1098-1168lm	Ø125*H48.7mm	Ø90-120mm	BK	Die-cast Aluminum	100°	2700K/3000K/4000K/5000K/5700K	30 PCS/CTN	675*410*210mm
DL1584-SCTC15C029360338000563	15W	1098-1168lm	Ø125*H48.7mm	Ø90-120mm	SCH	Die-cast Aluminum	100°	2700K/3000K/4000K/5000K/5700K	30 PCS/CTN	675*410*210mm


LED DOWNLIGHT WITH SERGIN



Product Features

- 3CCT Changeable
- Dimmable with leading and trailing edge phase cut dimmers
- Die-cast aluminum lamp body,excellent heat dissipation
- Power coating finish from AkzoNobel.
- Interchangeable face plate with magnetic design
- 3 years replacment warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	△	CCT		
DL51-WHTC5C01	9360338001096	5W	191-222lm	Ø55*H40.6mm	Ø45mm	WH	Die-cast Aluminum 36°		3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
DL51-BKTC5C01	9360338001119	5W	173-201lm	Ø55*H40.6mm	Ø45mm	BK	Die-cast Aluminum 36°		3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
DL51-SCTC5C01	9360338001102	5W	191-222lm	Ø55*H40.6mm	Ø45mm	SCH	Die-cast Aluminum 36°		3000K/4000K/5000K	50 PCS/CTN	340*340*240mm

LED DOWNLIGHT WITH SERGIN




White



Product Features

- Dimmable with trailing edge and universal dimmer
- With built-out driver and Australian standard plug
- Low profile
- 3 years replacement warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box
DL1071-WHTC10S01	9360338000785	10W	700-710lm	Ø110*H29.5mm	80-95mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	50 PCS/CTN	625x255x375mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



AL5007-WHTC10S02-TS



White




Product Features

- It will turn off in 40 seconds if there is no motion detected
- High efficiency LED chip and translucent diffuser
- With separate driver and Australian standard plug
- Easy installation
- 3 Years Replacment Warranty

Application Areas

- Residential area
- Commercial areas:shops,hotel etc

Dimensions

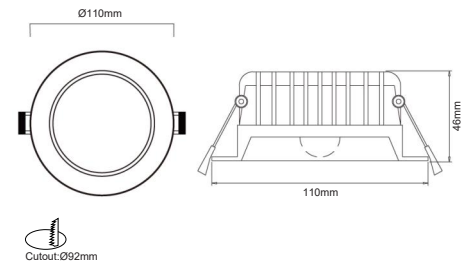

AL5007-WHTC10S02-TS

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Box	Box
-------	---------	---	----	------	--------	-------	----------	------	-----	-----	-----

AL5007-WHTC10S02-TS 9360338000464 10W 800lm Ø110*H46mm Ø92mm WH Die-cat Aluminum 100° 3000K/4000K/6000K 30PCS/CTN L375*W265*H275mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL10W-RGB



White




Product Features

- 2.4G WiFi Signal, Easy dimming;
- High efficiency LED chip and translucent diffuser
- Integrated design, with built in driver and flex and plug
- UL 94V0 fire-rated PC+AL heat sink
- Work temperature between -20°C and 50°C
- 2 years replacement warranty

Smart features

- Control lights and other appliances through Smart Life APP from anywhere support Google Home or Amazon Echo voice control
- Protect your home with home automation tasks during holidays
- Support scene management, you can control group of devices in-one-click work with Home Automation
- Preset schedule, turn on/off lights as schedule
- Compatible with all Tuya Powered apps


Dimensions

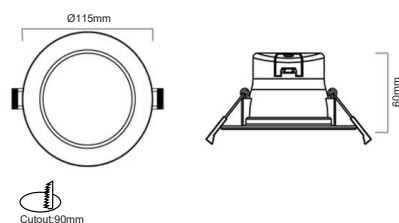

DL10W-RGB

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box Size
DL10W-WHRGB10S01	9360338000457	10W	650-750lm	Ø115*60mm	90mm	WH	Die-cat Aluminum	110°	3000K/6000K/RGB	40 PCS/CTN	620*255*320mm

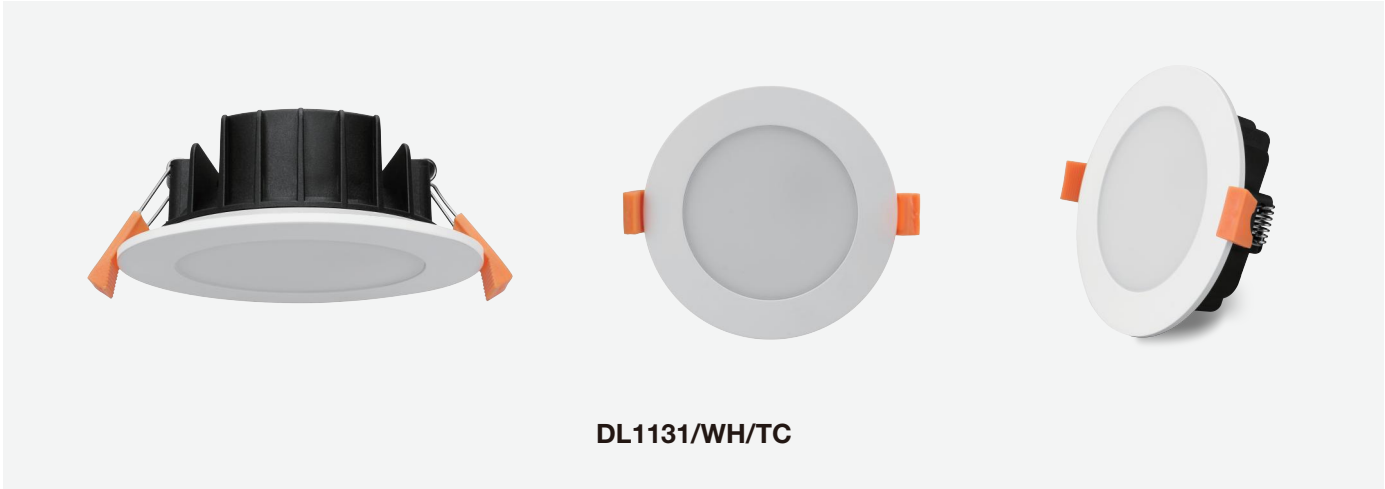

White

120°

AC 200-240V

CRI 80

SMD

IP54

3000K 4000K 5000K

DIM


3 years

IC-4

Product Features

- Long life,average 40,000Hours
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation,easy controlled by Smart Life App on your phone by bluetooth
- 3 years replacment warranty

Dimensions

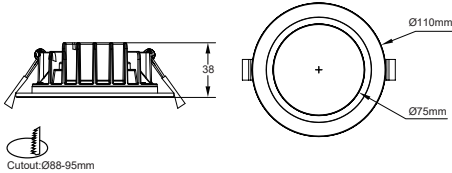

DL1131/WH/TC

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	PCS/CTN	Box Size
DL1131-WHTC10S01SC	9360338000143	10W	750-800lm	Ø110*H38mm	Ø88-95mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	30 PCS/CTN	130*130*500mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL110ECO



White



Product Features

- Non-dimmable , built in LED driver
- Integrated design
- Economical style , low profile body design
- 2 years replacement warranty

Dimensions



DL110ECO

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material		CCT		
DL110ECO-WH3KS01	9360338012214	10W	750lm	Ø110*45mm	90mm	WH	Die-cat Aluminum	110°	3000K	40 PCS/CTN	580*250*260mm
DL110ECO-WH57S01	9360338012221	10W	750lm	Ø110*45mm	90mm	WH	Die-cat Aluminum	110°	5700K	40 PCS/CTN	580*250*260mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




White



Product Features

- Dimmable with trailing edge and universal dimmer
- Advanced thermal conductive plastic radiator
- Integrated design, with built in driver and flex and plug
- 3 years replacement warranty

Dimensions

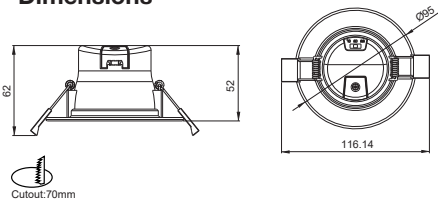


DL1195-WHTC7S01

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1195-WHTC7S01	9360338000488	6W	500-600lm	Ø95*52mm	70mm	WH	Die-cast Aluminum	110°	3000K/4000K/6000K	48 PCS/CTN	415*345*300mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES

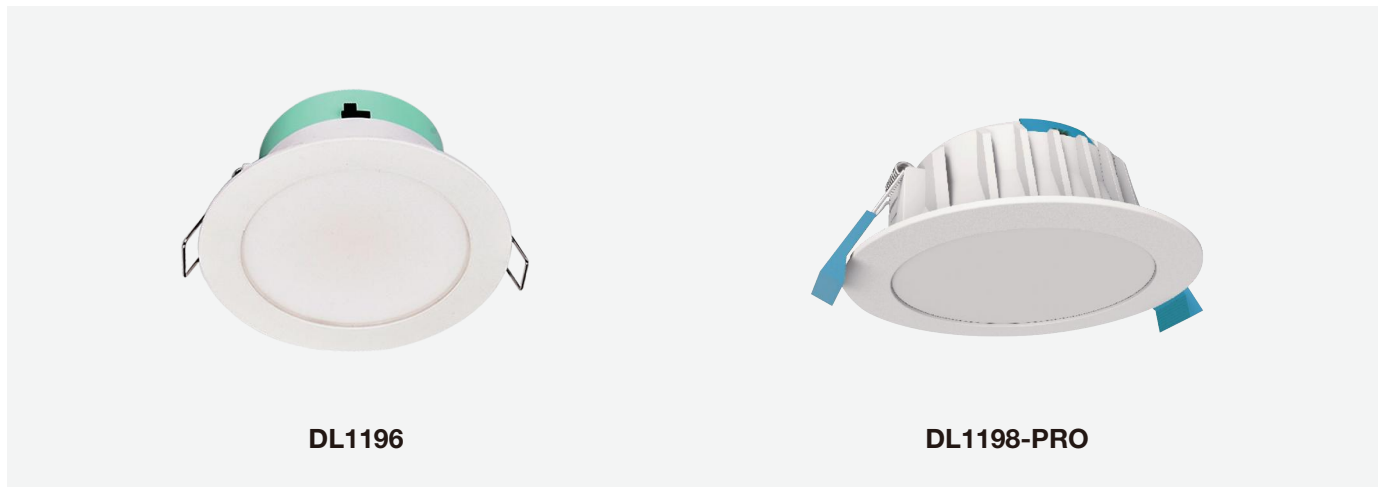

DL1196

DL1198-PRO




White



Product Features

- IPART APPROVAL
- Integrated design , with built in driver and flex and plug
- 3 years replacement warranty
- Low profile with ribs body design,DL1198PRO

Dimensions

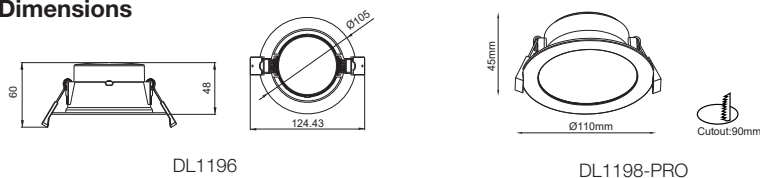


DL1196

DL1198-PRO

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
3A-DL1196-TC WH Tri-Colour	9360338000419	10W	750-900lm	Ø105*48mm	90mm	WH	Die-cast Aluminum	110°	3000K/4000K/5000K	30 PCS/CTN	600*245*257mm
DL1198PRO-WHTC10501	9360338000440	10W	940-1050lm	Ø110*45mm	90mm	WH	Die-cast Aluminum	110°	3000K/4000K/5700K	40 PCS/CTN	580*250*260mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES

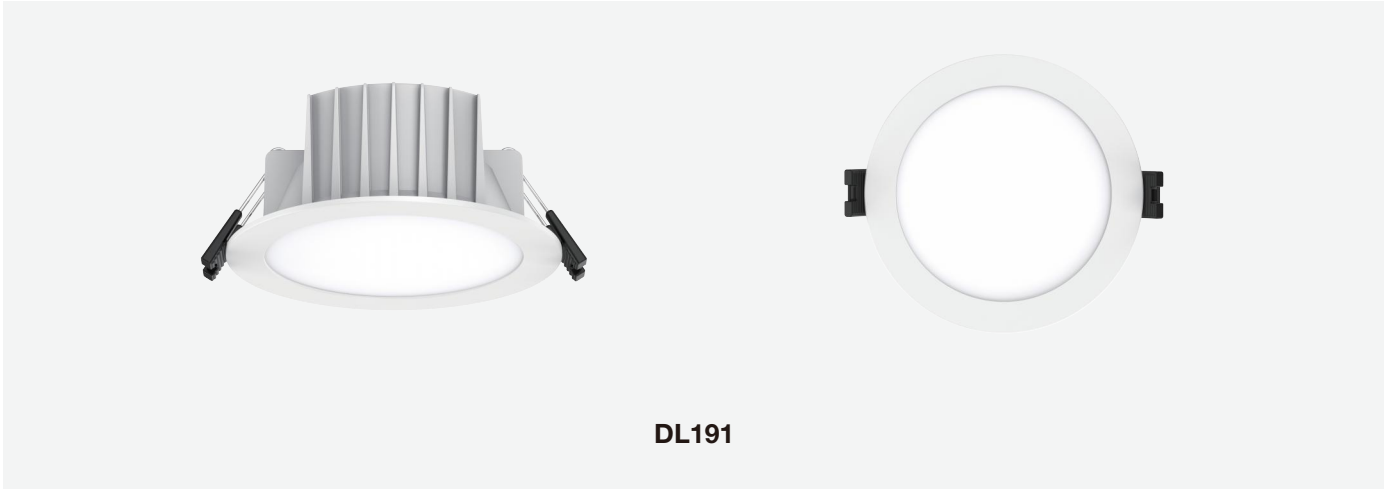

White


Product Features

- High Lumen efficiency
- IP54 waterproof in front
- Compact design,built-in driver
- Translucent diffuser ensure uninform lighting
- Interchangeable CCT(3000K/4000K/5700K) with slide switch

Application Areas

- It is designed for general lighting applications in office, supermarket,shop,hotel,etc

Dimensions

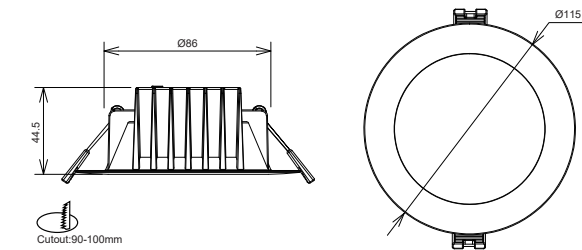


DL191

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box
-------	---------	---	----	------	--------	-------	----------	------	-----	------	-----

DL191-WHTC10S01 9360338009993 10W 660-800lm Ø115*44.5mm 90-100mm WH Die-cat Aluminum 100° 3000K/4000K/5700K 60PCS/CTN 520*395*330mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES

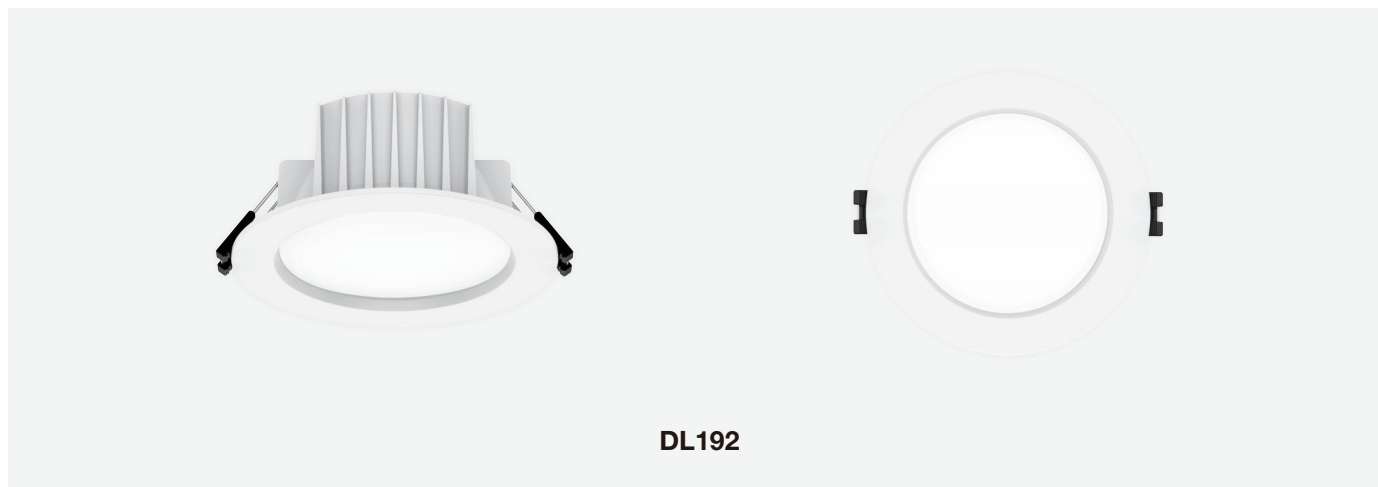

White




Product Features

- High Lumen efficiency
- IP54 waterproof in front
- Compact design,built-in driver
- Translucent diffuser ensure uninform lighting
- Interchangeable CCT(3000K/4000K/5700K) with slide switch

Application Areas

- It is designed for general lighting applications in office, supermarket,shop,hotel,etc

Dimensions

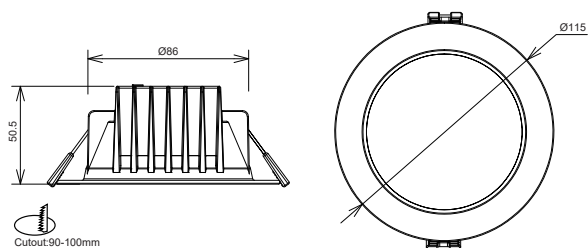

DL192

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Box Size
DL192-WHTC10S02	9360338010005	10W	660-800lm	Ø115*50.5mm	90-100mm	WH	Die-cat Aluminum	100°	3000K/4000K/5700K	60PCS/CTN	520*395*330mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




White



Product Features

- Dimmable with trailing edge and universal dimmer
- Integrated design, with built in driver and flex and plug
- 10W Step Dimmable By Wall Switch
- Switch on the light will be automatically set 100% of its maximum light output (900lm)
- Switch off and switch on within 2 seconds, the light will be set to 50% of its light output (450lm)
- Switch off and switch on again within 2 seconds, the light will be set to 10% of its lightoutput (90lm)
- 3 years replacement warranty

Dimensions

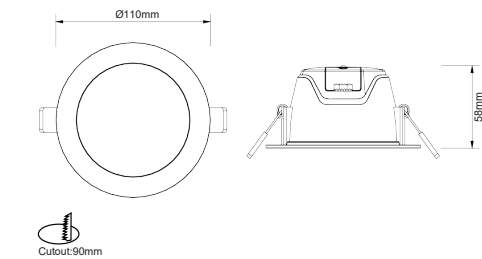

DL1194

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1194-WHTC10S01	9360338000426	10W	850-900lm	Ø110*58mm	90mm	WH	Die-cat Aluminum	110°	3000K/4000K/5000K	30PCS/CTN	600*245*257mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL1197




White



Product Features

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Integrated design, with built in driver and flex and plug
- 3 years replacement warranty

Dimensions

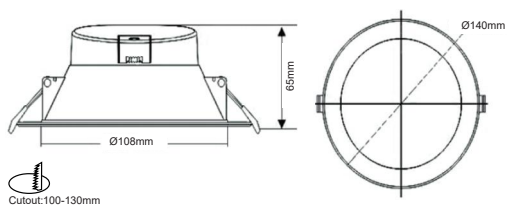

DL1197

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packing	Box Size
DL1197-WHTC15S01	9360338000495	15W	1020-1200lm	Ø140*65mm	100-130mm	WH	Die-cat Aluminum	110°	3000K/4000K/6000K	36 PCS/CTN	450*450*345mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



White

110°

AC 200-240V

CRI 80

SMD

IP44

DIM80%

3000K 4000K 5000K


IC-4

3 years

Product Features

- Dimmable with trailing edge and universal dimmer
- Advanced thermal conductive plastic radiator
- Tri-colour design,can reduce your stock
- 3 years replacement warranty

Dimensions

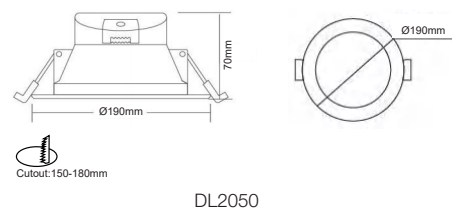

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam angle	CCT	Packaging	Dimensions
DL2050-WHTC20S01	9360338000501	20W	1550-1800lm	Ø190*H70mm	150-180mm	WH	Die-cast Aluminum	110°	3000K/4000K/5000K	24 PCS/CTN	600*405*340mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




White Black



Product Features

- Deep recessed
- Suitable for regular MR16(49.8mm) engine/module/bulb


Dimensions

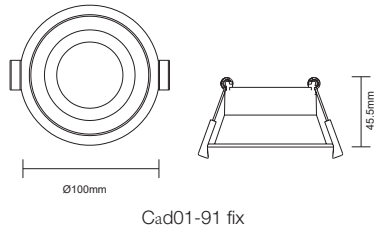

Technical Specification

Model	Size	Cutout	Color	Material		
Cad01-91 fix	Ø100-H45.5mm	Ø90-92mm	WH/BK	Die-cat Aluminum	L555*W450*H355 100PCS/CTN	L108*D108*H67mm


LED DOWNLIGHT AND LED SHOP LIGHT SERIES



Product Features

- Die-casting aluminum heatsink+PC:replaceable fame achieve cost-down downlight solution with good heat dissipation
- IP54 waterproof,wet environment feasible
- High efficiency,up to 105.7lm/W
- 3-year guarantee
- Multi-functional design with single colour,COB tri-colour,SMD tri-colour,SMD dim-to-warm as options
- External driver and dimming capability suits triac dimmers including OPUS,Clipsal,HPM,Niko,Lumeo Eco.The diver with SAA,RCM and CE certification
- DALI Optional
- C BUS 2 Compatible
- Separate driver

Dimensions

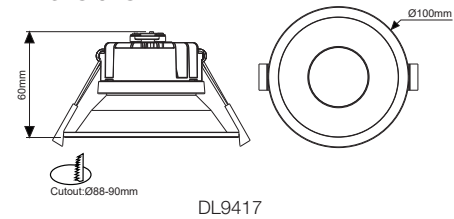


Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	PCS/CTN	Box Size
DL9417-WHTC10S03	9360338008729	10W	786-921lm	Ø100*H60mm	88-90mm	WH	Die-cat Aluminum	60°	3000K/4000K/5000K	30 PCS/CTN	380*260*375mm
DL9417-BKTC10S03	9360338008736	10W	785-921lm	Ø100*H60mm	88-90mm	BK	Die-cat Aluminum	60°	3000K/4000K/5000K	30 PCS/CTN	380*260*375mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



TH21




Product Features

- 3 wire adaptor
- Die-cast Aluminum body
- Compatible with leading and trailing edge phase cut dimmers
- Patented recessed case gives better friction on rotation and create pleasant gear noise
- Variety of less-glare optic options
- 3 years replacement warranty

Applications

- Residential area
- Commercial areas:shops,hotel etc

Dimensions



TH21

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box Size
TH21-WH3K10C02	9360338001676	10W	719-810lm	D50*H175.8mm	Ø68mm	WH	Die-cat Aluminum	60°	3000K	25 PCS/CTN	L565*W440*H240mm
TH21-BK3K10C02	9360338001683	10W	719-810lm	D50*H175.8mm	Ø68mm	BK	Die-cat Aluminum	60°	3000K	25 PCS/CTN	L565*W440*H240mm

LED DOWNLIGHT AND LED SHOP LIGHT SERIES



DL1016-WH4C8S03




DL1016-BK4C8S03



Product Features

- Adopt anti-glare design,UGR<19
- Flicker free
- Commercial grade quality and design
- Made with LM80 certified SMD LED chips
- Long life-span with low power consumption
- Include dimmable driver and Australian plug
- 3 years replacement warranty

Dimensions



DL1016

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Packaging
DL1016-WH4C8S03	9360338009191	10W	800-900lm	Ø104*H85mm	Ø90mm	WH	Die-cat Aluminum	60°	3000K/4000K/5000K/5700K	30 PCS/CTN
DL1016-BK4C8S03	9360338009207	10W	650-750lm	Ø104*H85mm	Ø90mm	BK	Die-cat Aluminum	60°	3000K/4000K/5000K/5700K	30 PCS/CTN

LED DOWNLIGHT AND LED SHOP LIGHT SERIES




White Black Chrome



Product Features

- Tilttable 30° in all directions
- Power selectable
- Easy loop in&out
- IC-4
- Compatible with leading and trailing edge phase cut dimmers
- 5 year guarantee

Dimensions

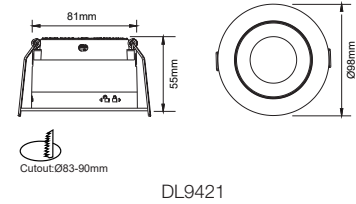

Technical Specification

Model	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT
DL9421	10W(Max),8W(Min)	722-831lm(Max),620-672lm(Min)	Ø98*H55mm	Ø83-90mm	WH/BK/SCH	Die-cat Aluminum	60°	2700K/3000K/4000K



CAPELLA 4




CAPELLA 3





CAPELLA 7

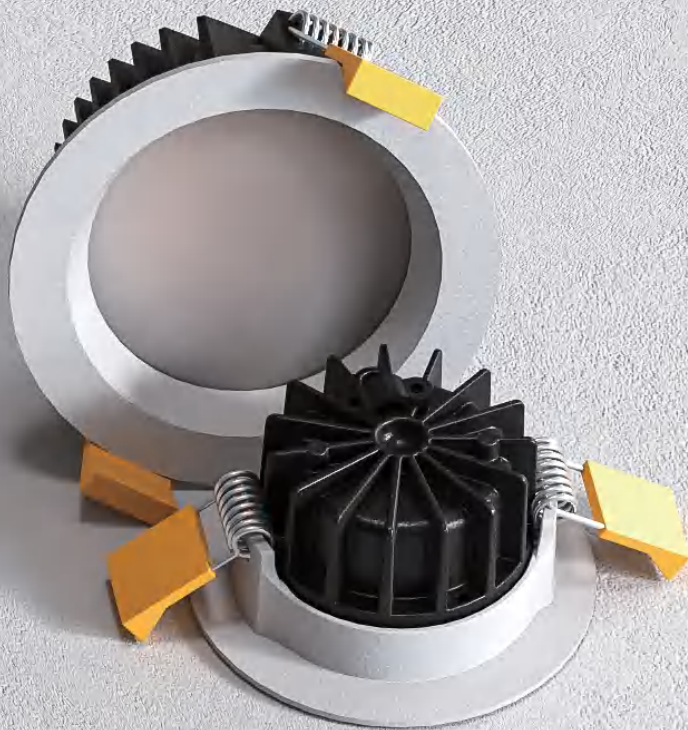

ATLAS 4



CAPELLA 6

LED RECESSED DOWNLIGHT




 White
  Black
  Satin chrome



Product Features

- Triac dimmable driver
- Adopt anti-glare diffuser
- Commercial grade quality and design
- Made with LM-80 certified SMD LED chips
- Long life span with low power consumption
- With built-out driver and Australian standard plug
- 3 Years Replacement Warranty

Dimensions

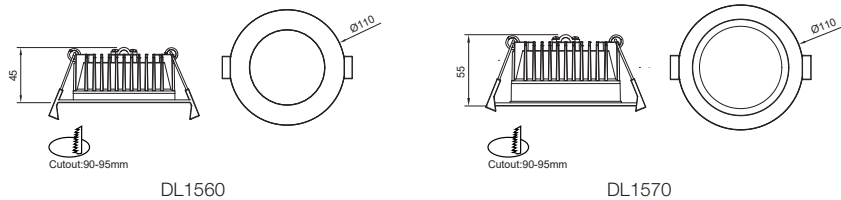

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Box Size
DL1560-WH5C10S01	9360338000327	13W	888lm	Ø110*H45mm	Ø90-95mm	WH	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm
DL1560-BK5C10S01	9360338000341	13W	888lm	Ø110*H45mm	Ø90-95mm	BK	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm
DL1560-SC5C10S01	9360338000334	13W	888lm	Ø110*H45mm	Ø90-95mm	SCH	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm
DL1570-WH5C10S02	9360338000358	13W	876lm	Ø110*H55mm	Ø90-95mm	WH	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm
DL1570-BK5C10S02	9360338000372	13W	876lm	Ø110*H55mm	Ø90-95mm	BK	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm
DL1570-SC5C10S02	9360338000365	13W	876lm	Ø110*H55mm	Ø90-95mm	SCH	Aluminum	100°	3000K&3500K&4000K&5000K&5700K	50 PCS/CTN	590*245*500 mm

LED RECESSED DOWNLIGHT




White Black Silver




Product Features

- Triac dimmable driver
- Adopt anti-glare diffuser
- Commercial grade quality and design
- Made with LM-80 certified SMD LED chips
- Long life span with low power consumption
- With built-out driver and Australian standard plug
- 3 years replacement warranty

Dimensions

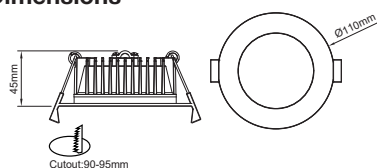

DL1561

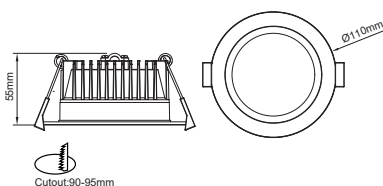

DL1571

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1561-WHTC13S01	9360338007869	13W	874lm	Ø110*H45mm	Ø90-95mm	WH	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm
DL1561-BKTC13S01	9360338007883	13W	874lm	Ø110*H45mm	Ø90-95mm	BK	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm
DL1561-SCTC13S01	9360338007876	13W	874lm	Ø110*H45mm	Ø90-95mm	SCH	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm
DL1571-WHTC13S02	9360338007890	13W	838lm	Ø110*H55mm	Ø90-95mm	WH	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm
DL1571-BKTC13S02	9360338007906	13W	838lm	Ø110*H55mm	Ø90-95mm	BK	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm
DL1571-SCTC13S02	9360338007913	13W	838lm	Ø110*H55mm	Ø90-95mm	SCH	Aluminum	100°	3000K&4000K&5700K	50 PCS/CTN	590*245*500 mm

LED RECESSED DOWNLIGHT



White Black Chrome






















Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- 3-year guarantee

Dimensions

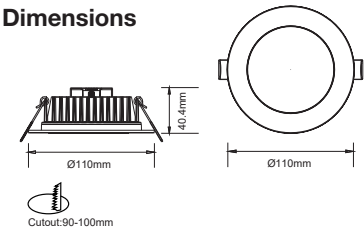

DL1562

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam angle	CCT	Quantity	Packaging
-------	---------	---	----	------	--------	-------	----------	------------	-----	----------	-----------

DL1562-GDTC15C02 9360338009580 13W 829-921lm Ø110*H40.4mm Ø90-100mm WH/BK/SCH Aluminum 100° 3000K&4000K&5000K 30 PCS/CTN 595*365*215mm

LED RECESSED DOWNLIGHT



White




Black




Product Features

- Triac dimmable driver
- Adopt anti-glare diffuser
- Commercial grade quality and design
- Made with LM-80 certified COB LED chips
- Long life span with low power consumption
- With built-out driver and Australian standard plug
- 3 years replacement warranty

Dimensions

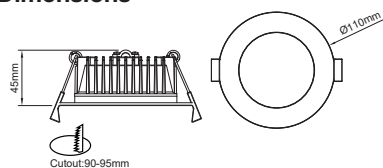

DL1756

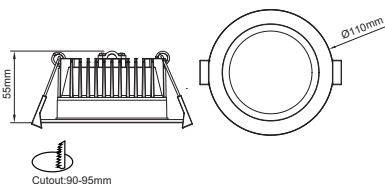

DL1757

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1756-WHTC12C02	9360338011064	12W	1000lm	Ø110*H45mm	90-95mm	WH	Aluminum	60°	3000K&4000K&5000K	50 PCS/CTN	590*245*500mm
DL1756-BKTC12C02	9360338011071	12W	1000lm	Ø110*H45mm	90-95mm	BK	Aluminum	60°	3000K&4000K&5000K	50 PCS/CTN	590*245*500mm
DL1757-WHTC12C02	9360338011040	12W	1000lm	Ø110*H55mm	90-95mm	WH	Aluminum	60°	3000K&4000K&5000K	50 PCS/CTN	590*245*500mm
DL1757-BKTC12C02	9360338011057	12W	1000lm	Ø110*H55mm	90-95mm	BK	Aluminum	60°	3000K&4000K&5000K	50 PCS/CTN	590*245*500mm


LED RECESSED DOWNLIGHT



Product Features

- Commercial grade quality and design
- Made with LM-80 certified SMD LED chips
- With buit-out driver and Australian standard plug
- Can adjust 15°
- Triac dimmable driver
- 3 years replacement warranty


Dimensions

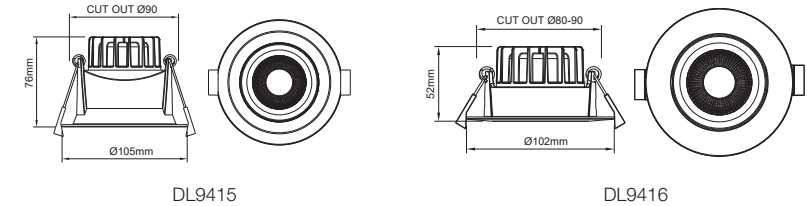

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	△	CCT		
DL9415-WHTC10C03	9360338000945	10W	768lm	Ø105*H76mm	90mm	WH	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm
DL9415-BKTC10C03	9360338000952	10W	768lm	Ø105*H76mm	90mm	BK	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm
DL9416-WHTC10C02	9360338000969	10W	785lm	Ø102*H52mm	90mm	WH	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm
DL9416-BKTC10C02	9360338000976	10W	785lm	Ø102*H52mm	90mm	BK	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm

LED RECESSED DOWNLIGHT

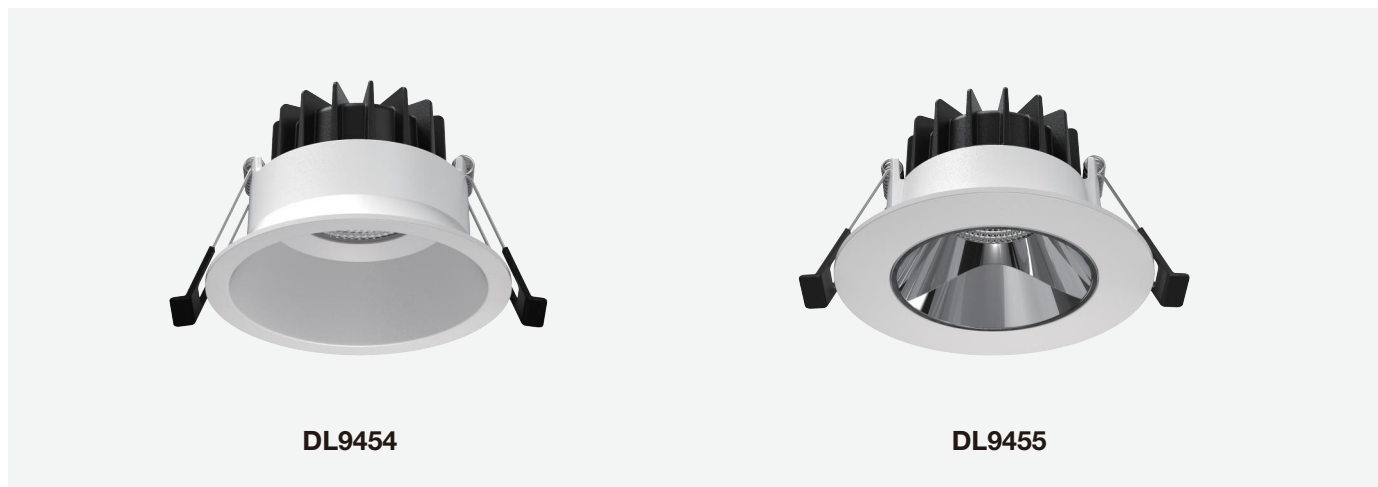

DL9454

DL9455



White




Matt black



Product Features

- Deep reflector design with UGR<19
- With built-out driver and Australian standard plug
- DL9455 comes with Matt blk / Bright Silver color reflector
- Triac dimmable driver
- 3 Years replacement warranty

Dimensions

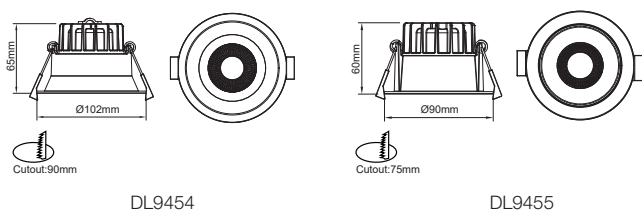

DL9454



DL9455

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL9454-WHTC10C03	9360338001027	10W	800lm	Ø102*H65mm	90mm	WH	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm
DL9454-BKTC10C03	9360338007289	10W	800lm	Ø102*H65mm	90mm	BK	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	620*255*355mm
DL9455-WHTC10C03	9360338001034	10W	760lm	Ø90*H60mm	75mm	WH	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	545*255*325mm
DL9455-BKTC10C03	9360338001041	10W	760lm	Ø90*H60mm	75mm	BK	Aluminum	80°	3000K&4000K&5700K	30 PCS/CTN	545*255*325mm

9455 Reflector



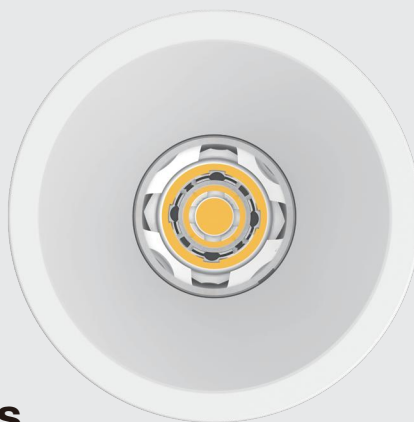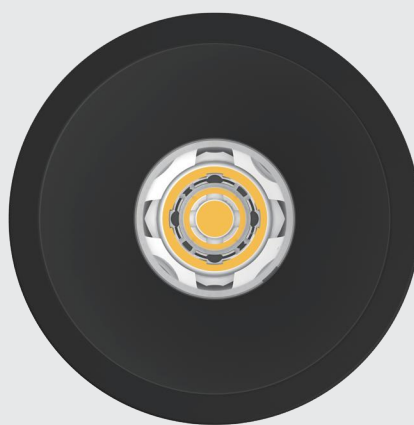

CAPELLA 12 Series

Colour Fullamp Cup

Deep Reflector Design

- IP54
- 3CCT
- DIY Install
- UGR<19


LED RECESSED DOWNLIGHT



Product Features

- Dimming ways: Triac dim, DALI
- Seperate driver
- Dali optional
- Anodised aluminum heat sink
- Easy installation
- 3 years replacement warranty

Dimensions




DL9452

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam angle	CCT	Packaging	Dimensions
DL9452-WHTC10C03	9360338011088	10W	1000lm	Ø102*H74mm	Ø90mm	WH	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm
DL9452-BKTC10C03	9360338011095	10W	1000lm	Ø102*H74mm	Ø90mm	BK	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm
DL9452-WH+SLTC10C03	9360338011101	10W	1000lm	Ø102*H74mm	Ø90mm	WH+SL	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm
DL9452-WH+BKTC10C03	9360338011132	10W	1000lm	Ø102*H74mm	Ø90mm	WH+BK	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm
DL9452-WH+GDTC10C03	9360338011118	10W	1000lm	Ø102*H74mm	Ø90mm	WH+GD	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm
DL9452-BK+GDTC10C03	9360338011125	10W	1000lm	Ø102*H74mm	Ø90mm	BK+GD	Aluminum	60°	3000K&4000K&5000K	36 PCS/CTN	390*390*485 mm


Front ring



LED DOWNLIGHT LIGHTS




DL9453



Product Features

- Dimming ways: Triac dim, DALI
- 9453 Triac Compatible CUBS Power
- Anodised aluminum heat sink
- Easy installation
- 3 years replacement warranty

Dimensions



DL9453

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box Size
DL9453-WH3K10C03	9360338000983	10W	795lm	Ø102*H70mm	90mm	WH	Die-cat Aluminum	60°	3000K	50 PCS/CTN	590*590*225 mm
DL9453-BK3K10C03	9360338001003	10W	795lm	Ø102*H70mm	90mm	BK	Die-cat Aluminum	60°	3000K	50 PCS/CTN	590*590*225 mm
DL9453-WH4K10C03	9360338000990	10W	795lm	Ø102*H70mm	90mm	WH	Die-cat Aluminum	60°	4000K	50 PCS/CTN	590*590*225 mm
DL9453-BK4K10C03	9360338001010	10W	795lm	Ø102*H70mm	90mm	BK	Die-cat Aluminum	60°	4000K	50 PCS/CTN	590*590*225 mm

LED RECESSED DOWNLIGHT



DL9411



White




Black



Product Features

- Dimming ways: Triac dim, DALI
- Seperate driver
- Dali optional
- Anodised aluminum heat sink
- Easy installation
- 3 years replacement warranty

Dimensions



DL9411


Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL9411-WH3K10C01	9360338000181	10W	816lm	Ø102*59.5mm	85-95mm	WH	Aluminum	38°	3000K	50 PCS/CTN	590*590*225mm
DL9411-WH4K10C01	9360338000198	10W	816lm	Ø102*59.5mm	85-95mm	WH	Aluminum	38°	4000K	50 PCS/CTN	590*590*225mm
DL9411-BK3K10C01	9360338000204	10W	816lm	Ø102*59.5mm	85-95mm	BK	Aluminum	38°	3000K	50 PCS/CTN	590*590*225mm
DL9411-BK4K10C01	9360338000211	10W	816lm	Ø102*59.5mm	85-95mm	BK	Aluminum	38°	4000K	50 PCS/CTN	590*590*225mm

LED DOWNLIGHT LIGHTS




DLJ103-WH3K10C02



Product Features

- IP54 Rating
- High CRI downlight
- CRI>80 for a more real lighting effect
- For home,office,store,super market, cafes, exhibition, halls,museum hotel,restaurant etc

Dimensions

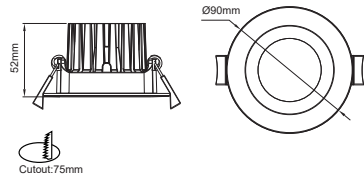

DLJ103-WH3K10C02

Technical Specification


Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box Size
DLJ103-WH3K10C02	9360338001126	10W	816lm	Ø90*H52mm	75mm	WH/BK	Die-cat Aluminum	60°	3000K	50 PCS/CTN	565*565*225mm




30W OFF 40W
WW NW CW

CRESCENT

IP54 Waterproof
Tri-CCT&Power

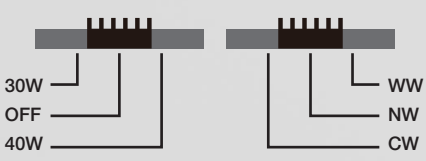

LED RECESSED DOWNLIGHT

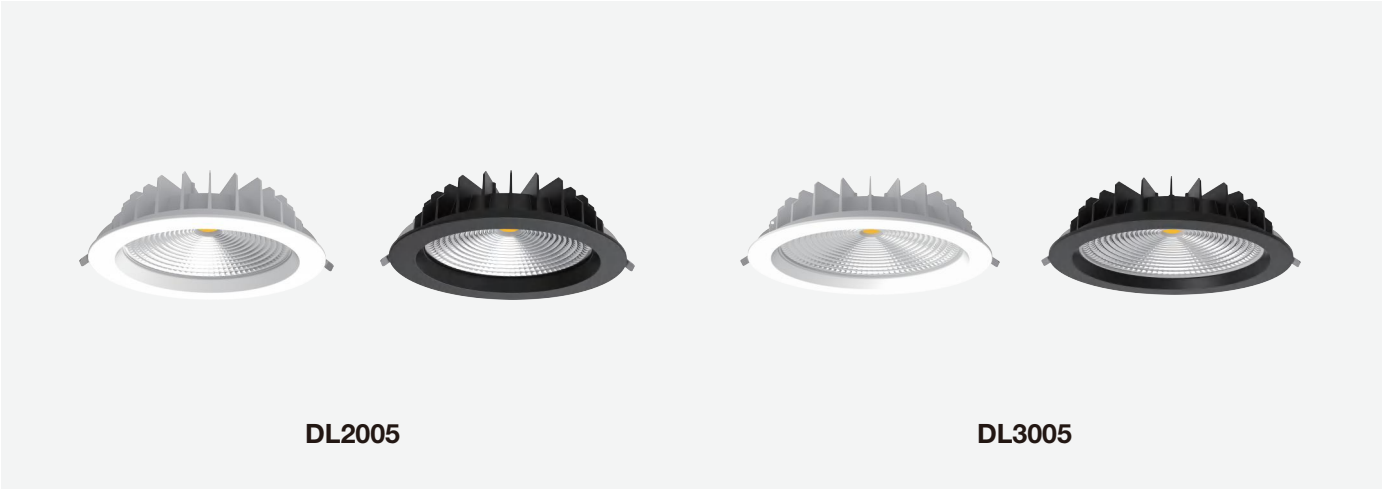


White Black



Product Features

- C-BUS2 compatible
- Dali2 optional
- Aluminium Casting
- DALI dim available
- With separate driver and Australian standard plug
- 3 years replacement warranty

Dimensions

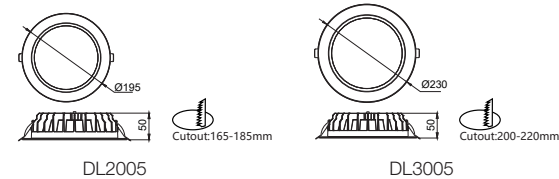

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL2005-WHTC20C02	9360338000631	20W	3449lm	Ø195*H50mm	165-185mm	WH	Aluminum	100°	3000K&4000K&5700K	18 PCS/CTN	615*440*260mm
DL2005-BKTC20C02	9360338000648	20W	3449lm	Ø195*H50mm	165-185mm	BK	Aluminum	100°	3000K&4000K&5700K	18 PCS/CTN	615*440*260mm
DL3005-WHTC30C02	9360338000662	30W	4379lm	Ø230*H50mm	200-220mm	WH	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	485*440*295mm
DL3005-BKTC30C02	9360338000679	30W	4379lm	Ø230*H50mm	200-220mm	BK	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	485*440*295mm

LED RECESSED DOWNLIGHT




White Black



Product Features

- C-BUS2 compatible
- Dali2 optional
- Aluminium Casting
- DALI dim available
- DL4001 wattage changeable 30W/40W
- With separate driver and Australian standard plug
- 3 years replacement warranty

Dimensions

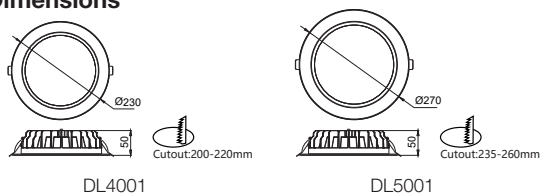

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Box	Box
DL4001-WHTCDP40S02	9360338000723	30W/40W	4896lm _(30W) /5758lm _(30W)	Ø230*H50mm	200-220mm	WH	Aluminum	100°	3000K&4000K&5700K	12PCS/CTN	485*440*295mm
DL4001-BKTCDP40S02	9360338000730	30W/40W	4896lm _(30W) /5758lm _(30W)	Ø230*H50mm	200-220mm	BK	Aluminum	100°	3000K&4000K&5700K	12PCS/CTN	485*440*295mm
DL5001-WHTC60S02	9360338009986	60W	5978lm	Ø270*H50mm	235-260mm	WH	Aluminum	100°	3000K&4000K&5700K	10PCS/CTN	565*385*330mm
DL5001-BKTC60S02	9360338000747	60W	5978lm	Ø270*H50mm	235-260mm	WH	Aluminum	100°	3000K&4000K&5700K	10PCS/CTN	565*385*330mm




ALCOR 3 Series

Triac dimmable
Modular & Ultra-thin


- DIY Design
- Lumen 120lm/W

DIY MODULE

DIY in 5 seconds, Meet your different needs

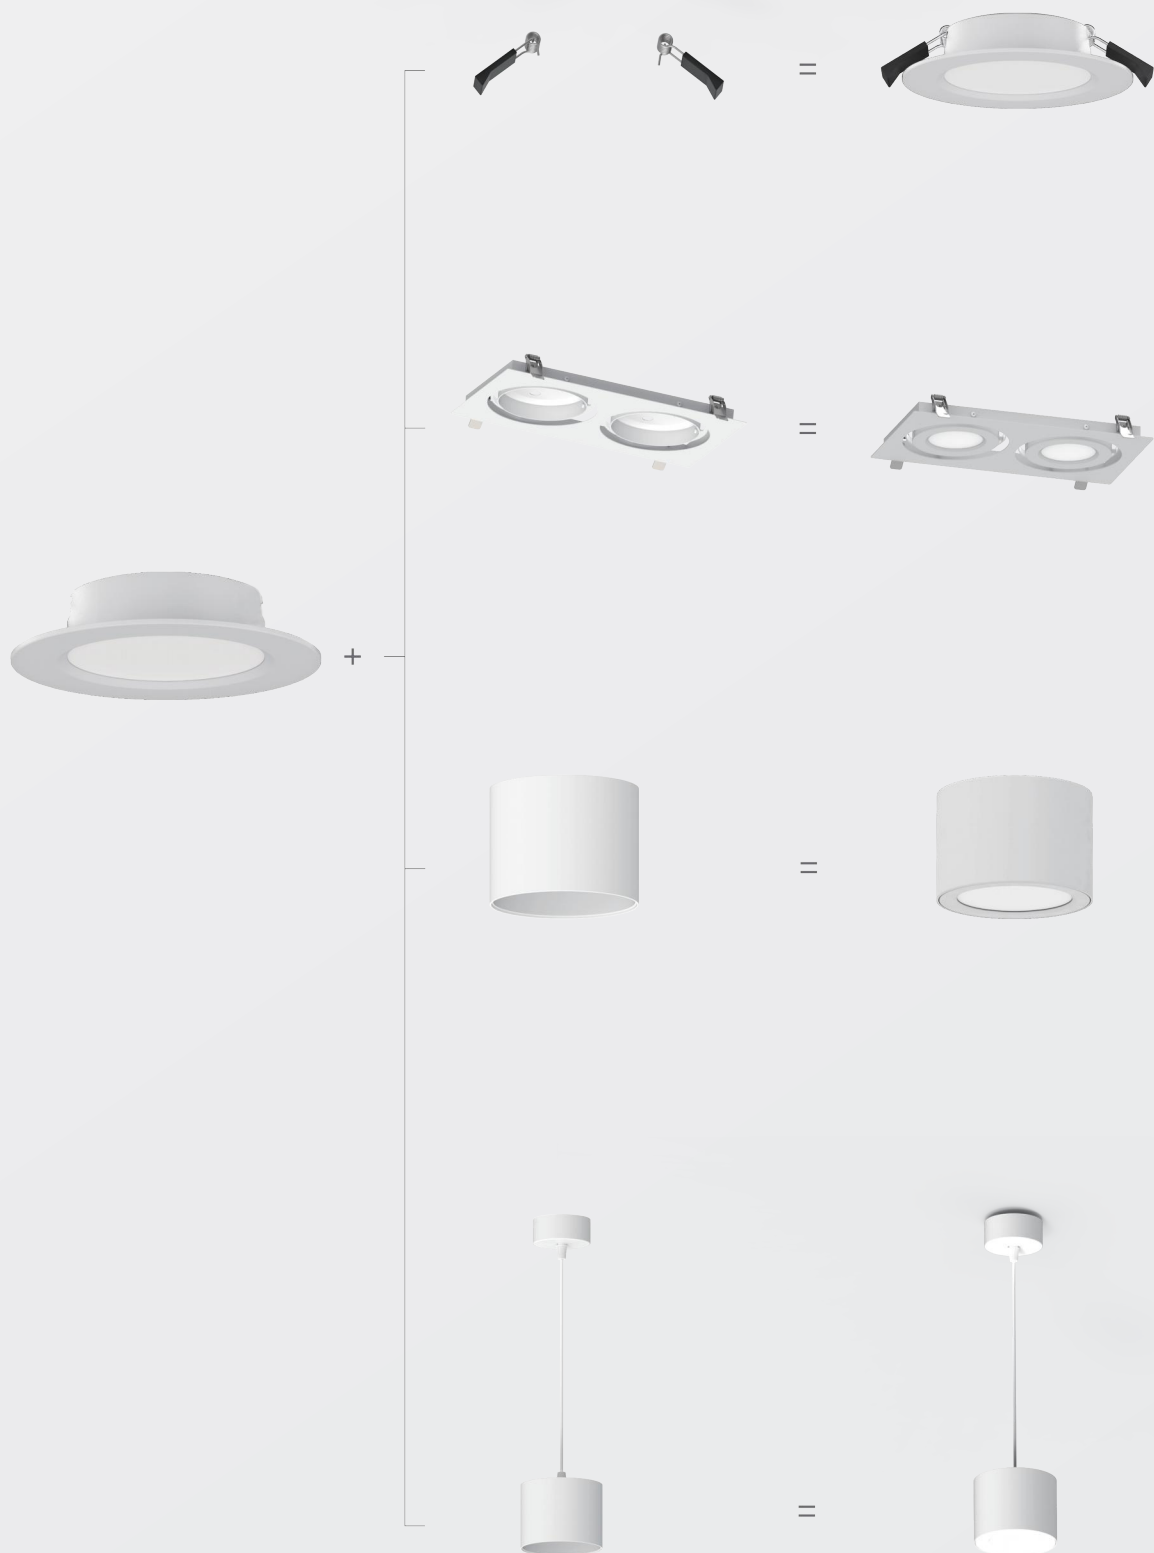


LED RECESSED DOWNLIGHT



Product Features

- Super slim design
- High lumen efficiency, 120lm/W
- DALI Dimmable driver available
- Separated driver
- Super slim SMD downlight
- 3 Years Warranty

Dimensions

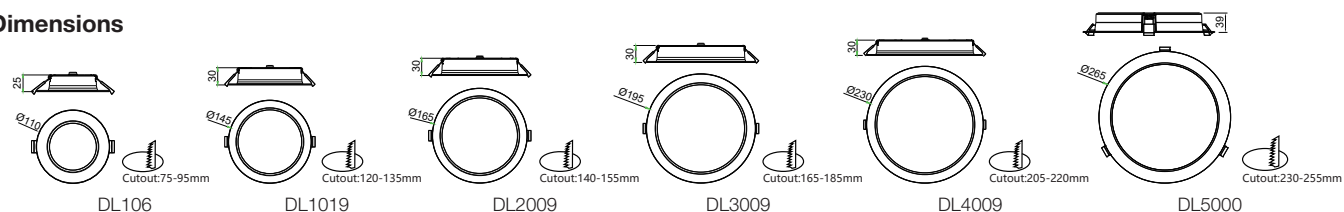

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL106-WHTC10S01	9360338001287	10W	1200lm	Ø110*H25mm	75-95mm	WH	Aluminum	100°	3000K&4000K&5700K	48 PCS/CTN	375*275*505mm
DL106-BKTC10S01	9360338007326	10W	1200lm	Ø110*H25mm	75-95mm	BK	Aluminum	100°	3000K&4000K&5700K	48 PCS/CTN	375*275*505mm
DL1019-WHTC15S01	9360338001294	15W	1800lm	Ø145*H30mm	120-135mm	WH	Aluminum	100°	3000K&4000K&5700K	36 PCS/CTN	495*335*415mm
DL1019-BKTC15S01	9360338007333	15W	1800lm	Ø145*H30mm	120-135mm	BK	Aluminum	100°	3000K&4000K&5700K	36 PCS/CTN	495*335*415mm
DL2009-WHTC20S01	9360338001300	20W	2400lm	Ø165*H30mm	140-155mm	WH	Aluminum	100°	3000K&4000K&5700K	28 PCS/CTN	375*375*480mm
DL2009-BKTC20S01	9360338007340	20W	2400lm	Ø165*H30mm	140-155mm	BK	Aluminum	100°	3000K&4000K&5700K	28 PCS/CTN	375*375*480mm
DL3009-WHTC30S01	9360338001317	30W	3600lm	Ø195*H30mm	165-185mm	WH	Aluminum	100°	3000K&4000K&5700K	16 PCS/CTN	445*265*425mm
DL3009-BKTC30S01	9360338007357	30W	3600lm	Ø195*H30mm	165-185mm	BK	Aluminum	100°	3000K&4000K&5700K	16 PCS/CTN	445*265*425mm
DL4009-WHTC40S01	9360338001324	40W	4800lm	Ø230*H30mm	205-220mm	WH	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	530*305*325mm
DL4009-BKTC40S01	9360338007364	40W	4800lm	Ø230*H30mm	205-220mm	BK	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	530*305*325mm
DL5000-WHTC50S01	9360338001331	50W	6000lm	Ø265*H39mm	230-255mm	WH	Aluminum	100°	3000K&4000K&5700K	8 PCS/CTN	620*350*225mm
DL5000-BKTC50S01	9360338007371	50W	6000lm	Ø265*H39mm	230-255mm	BK	Aluminum	100°	3000K&4000K&5700K	8 PCS/CTN	620*350*225mm

Super slim

Remote control



ON/OFF

Sensor

Stand-by

Dim Level

Dim+

Dim-

10%

30%

Hold Time

30s

1min

5min

10min

Detection Area

←→

←

→

↔

Stand-by Period

0s

3min

10min

∞

Daylight Threshold

Test

☾

☀

Disable

Remote control unit

Introduction to Keys



Normal ON/OFF

Pressing the ON/OFF button, sensing function is canceled and the light will remain ON/OFF. Sensor has power-off memory function, that is: pressing this button, the sensing function is still canceled after power off, and the light remains full brightness

Increasing Brightness


Pressing this button continuously, the brightness will increase. When adjusting the brightness at full brightness ON/OFF mode is still available

Reducing Brightness

Pressing this button continuously, the brightness will reduce. When adjusting the brightness at full brightness ON/OFF mode is still available

TEST Button

Pressing this button, the light will turn off after 2 seconds. Restore to last sensing setting after power off

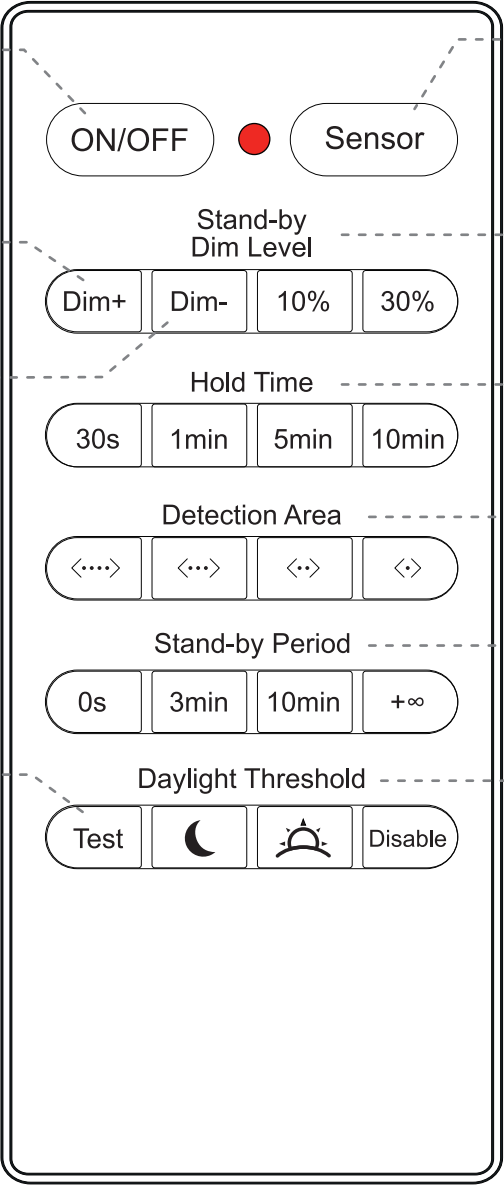

Secover sensing

Pressing this button to recover sensing function

Low Brightness

10%,30%

100% Brightness

30s,1min,5min,10min

Detection Area

100% <...>,75% <...>,50% <..>,25% <.>

Stand-by Time

0s,3min,10min,+∞

Threshold

15lux ☾,50lux ☀,Disable

LED RECESSED DOWNLIGHT



AL5006 & AL5008 & AL5009 & AL5010 & AL5011




White



Product Features

- IP54 Rating
- Flicker free
- Super slim SMD downlight
- Microwave sensor
- Interchangeable CCT (3000K+4000K+5700K) with A slide switch
- For home, office, store, super market, cafes, exhibition, halls, museum hotel, restaurant etc

Dimensions

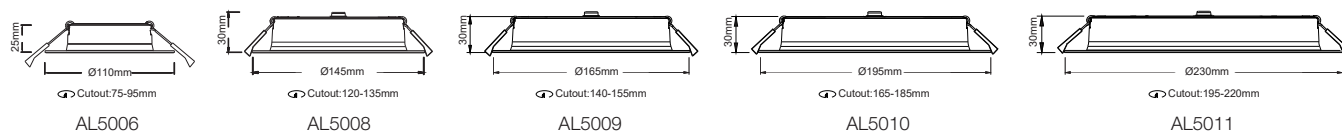

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packing	Dimensions
AL5006-WHTC7502-TS	9360338009856	10W	860lm	Ø110x25mm	Ø75-95mm	WH	Aluminum	100°	3000K&4000K&5700K	48 PCS/CTN	375x275x505mm
AL5008-WHTC12502-TS	9360338009863	12W	1575lm	Ø145x30mm	Ø120-135mm	WH	Aluminum	100°	3000K&4000K&5700K	36 PCS/CTN	495x335x415mm
AL5009-WHTC15502-TS	9360338009870	15W	1765lm	Ø165x30mm	Ø140-155mm	WH	Aluminum	100°	3000K&4000K&5700K	28 PCS/CTN	375x375x480mm
AL5010-WHTC18502-TS	9360338009887	18W	2252lm	Ø195x30mm	Ø165-185mm	WH	Aluminum	100°	3000K&4000K&5700K	16 PCS/CTN	445x265x425mm
AL5011-WHTC24502-TS	9360338009894	24W	3065lm	Ø230x30mm	Ø195-220mm	WH	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	530x305x325mm

CAPELLA 11

Series



ERP CLASS A

Lower-UGR

Triac Color

160lm/W

UGR<19

LED RECESSED DOWNLIGHT



DL108 & DL1008 & DL2008 & DL3008



White




Black




Product Features

- IP54 Rating
- Flicker free
- Anti-glare design, UGR<19
- High lumen efficiency, 160lm/W
- Interchangeable CCT (3000K+4000K+5700K) with A slide switch
- 3 Years Warranty


Dimensions




DL108



DL1008



DL2008



DL3008

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL108-WHTC7S03	9360338009900	7W	1120lm	Ø110x55mm	Ø90-100mm	WH	Aluminum	60°	3000K&4000K&5700K	30 PCS/CTN	405x275x350mm
DL108-BKTC7S03	9360338009917	7W	1120lm	Ø110x55mm	Ø90-100mm	BK	Aluminum	60°	3000K&4000K&5700K	30 PCS/CTN	405x275x350mm
DL1008-WHTC12S03	9360338009924	12W	1920lm	Ø145x70mm	Ø120-135mm	WH	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	335x335x425mm
DL1008-WHTC12S03	9360338009931	12W	1920lm	Ø145x70mm	Ø120-135mm	WH	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	335x335x425mm
DL2008-WHTC20S03	9360338009948	20W	3200lm	Ø165x75mm	Ø135-155mm	WH	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	375x375x450mm
DL2008-WHTC20S03	9360338009955	20W	3200lm	Ø165x75mm	Ø135-155mm	WH	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	375x375x450mm
DL3008-WHTC35S03	9360338009962	35W	5600lm	Ø230x90mm	Ø195-220mm	WH	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	505x505x325mm
DL3008-BKTC35S03	9360338009979	35W	5600lm	Ø230x90mm	Ø195-220mm	BK	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	505x505x325mm


LED MODULE



Product Features

- 5 CCT changeable with CCT controller
- Fit in most of MR16 downlight converters
- 3 years replacement warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam angle	CCT	Packaging	Dimensions
MD02-5C10C01	9360338000860	10W	520-625lm	Ø49.8*H80.3mm	BK	Die-cat Aluminum	60°	2700K/3000K/4000K/5000K/5700K	60PCS/CTN	540*415*350mm

LED MODULE



BL-5CLR-Module




Black



Product Features

- 5 CCT changeable with CCT controller
- Fit in most of MR16 downlight converters
- 3 years replacement warranty

Dimensions



BL-5CLR-Module

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Beam Spread	Beam Spread
BL-5CLR-Module	936033800000b	6W	327-387lm	Ø49.8*H64.1mm	BK	Die-cat Aluminum	60°	2700K/3000K/4000K/5000K/5700K	/	/

LED MODULE



MD01-TC




Black



Product Features

- Heat sink design better for air convection,good heat dissipation
- Pre-set tri-color temperature switch for diverse needs
- Dimming capability.Suits triac dimmers including OPUS,Clipsal,HPM,Niko,Lumeo Lumeo Eco.The driver with CE,RCM and SAA certification.
- 3 year guarantee

Dimensions




MD01-TC

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT
MD01-TC13C01	9360338000884	13W	906-1064lm	H83*Ø49.8mm	BK	Die-cat Aluminum	60°	3000K/4000K/5000K

TRIMLESS DOWNLIGHT

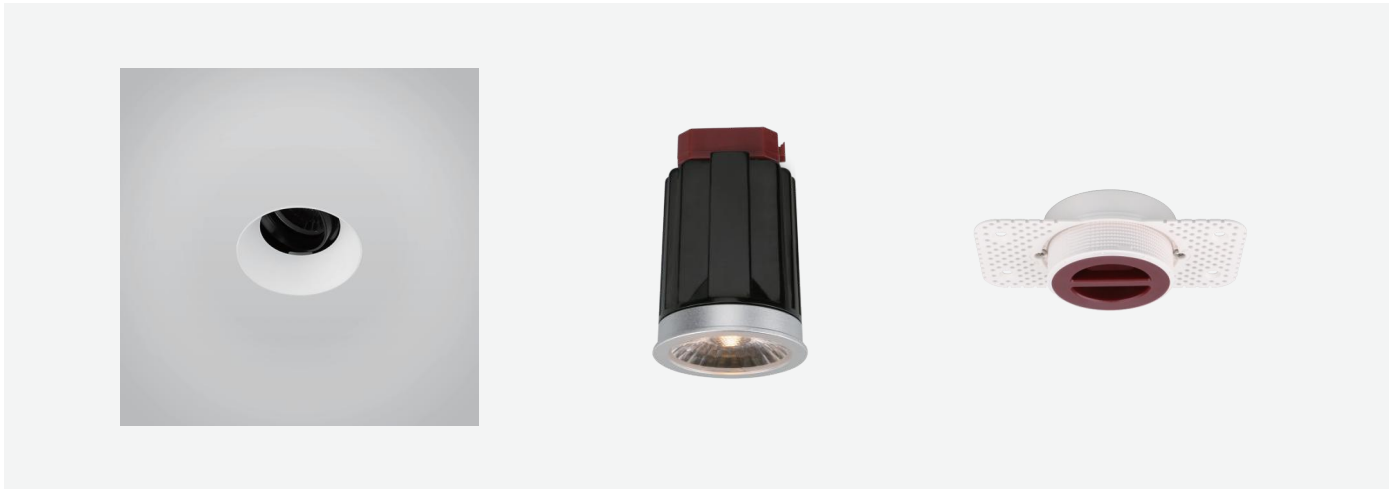


- 
White
- 
Black
- 
Golden
- 
Specular



Product Features

- Gimbal
- Trimless
- Installation friendly for ceilings with different kinds of thickness
- Anti-glare reflector color interchangeable without tools
- Suitable for regular MR16(49.8mm) engine/module/bulb

Dimensions




Technical Specification

Box Dimensions	Box Net Weight	Box Gross Weight	Carton Dimensions	Carton Net Weight	Carton Gross Weight	Cutout
L168*W97*H77mm	0.14Kg	0.235Kg	L500xW350 xH410 mm/50 PCS	7Kg	12.6Kg	Ø89mm

Reflector




LED MODULE FRAME



Product Features

- Gimbal.
- Deep recessed.
- Suitable for regular MR16(49.8mm) engine/module/bulb.

Dimensions

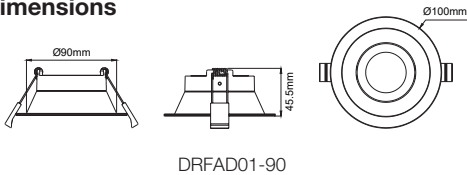

DRFAD01-90

Technical Specification

Model	Barcode	Size	Cutout	Color	Material			
DRFAD01-90BK	9360338005865	Ø100m*H45.5mm	Ø90-92mm	BK	Die-cat Aluminum	25°	100PCS/CTN	555*450*355mm
DRFAD01-90WH	9360338005872	Ø100m*H45.5mm	Ø90-92mm	WH	Die-cat Aluminum	25°	100PCS/CTN	555*450*355mm

LED CABINET LIGHT




DL103



Product Features

- Mounting Surface mount and recessed mount optional
- Easy selectable color temperature with a DIP switch,tri color
- 12V DC LED dirver required,wire in parallel
- Low profile design
- Die-cast aluminium construciton
- Quality white,black or satin nickel plated finish
- Surface mount and recessed mont optional
- Pre-wired with 1.2m cable
- Indoor use only
- 3 years replacment warranty

Dimensions




Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Cutout		
DL103-WHTC03S01	9360338001256	3W	210-280lm	Ø70*H14mm	WH	Die-cat Aluminum	57mm	10 PCS/CTN	L540*W320*H365mm
DL103-SCTC03S01	9360338001263	3W	210-280lm	Ø70*H14mm	SCH	Die-cat Aluminum	57mm	10 PCS/CTN	L620*W330*H415mm
DL103-BKTC03S01	9360338001270	3W	210-280lm	Ø70*H14mm	WH	Die-cat Aluminum	57mm	10 PCS/CTN	L620*W430*H515mm

LED RECESSED DOWNLIGHT




White Black



Product Features

- Commercial grade quality and design
- Separate driver, dali2 optional
- With separate driver
- With 1.2 meter Australia Plug

Dimensions

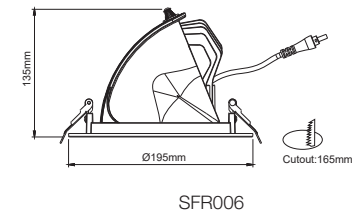


Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Beam Angle	Beam Angle
SFR006-WHTC3832501	9360338001201	32W/38W	2943lm(32W)/3959lm(38W)	Ø195*H135mm	165mm	WH	Aluminum	90°	3000K&4000K&5700K	12PCS/CTN	435*435*505mm
SFR006-BKTC3832501	9360338001218	32W/38W	2943lm(32W)/3959lm(38W)	Ø195*H135mm	165mm	BK	Aluminum	90°	3000K&4000K&5700K	12PCS/CTN	435*435*505mm

LED RECESSED DOWNLIGHT




 White



Product Features

- Commercial grade quality and design
- Separate driver, dali2 optional
- With separate driver
- With 1.2 meter Australia Plug


Dimensions

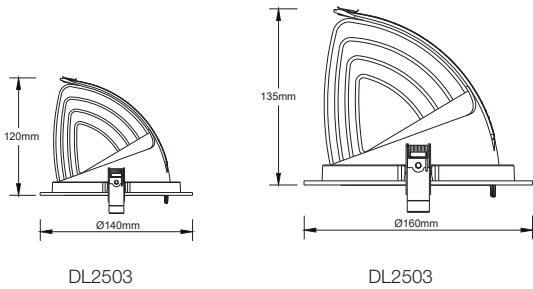

Technical Specification


Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL2503-WHTC20C02	9360338007173	20W	1800lm	D140*H120mm	D125*130mm	WH	Aluminum	36°	3000K&4000K&5700K	8PCS/CTN	330*330*290mm
DL3503-WHTC30C02	9360338007180	30W	2700lm	D160*H135mm	D145*150mm	WH	Aluminum	36°	3000K&4000K&5700K	8PCS/CTN	560*380*170mm

LED RECESSED DOWNLIGHT




Product Features

- Commercial grade quality and design
- Made with LM-80 certified COB LED chips
- With separate driver and Australian standard plug
- Dali2 optional
- Adjust 90
- 3 Years Replacment Warranty

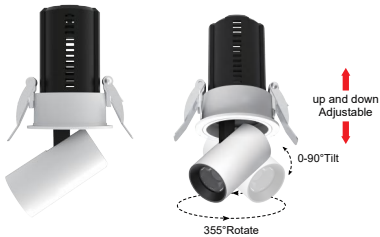

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DLV325-WHTC12C02	9360338007463	12W	1109lm	Ø110*H127mm	Ø95mm	WH	Aluminum	50°	3000K&4000K&5700K	30 PCS/CTN	L460*W255*H330mm
DLV325-BKTC12C02	9360338007470	12W	1109lm	Ø110*H127mm	Ø95mm	BK	Aluminum	50°	3000K&4000K&5700K	30 PCS/CTN	L460*W255*H330mm
DLV324-BKTC7C02	9360338012344	7W	960lm	Ø84*H104mm	Ø75mm	WH	Aluminum	50°	3000K&4000K&5700K	10 PCS/CTN	L400*W310*H220mm

AVIOR 3 Series

Tri Color

SMD LED chip

0-60° Adjustable



LED RECESSED DOWNLIGHT




White Black

Product Features

- Commercial grade quality and design
- Separate driver, dali2 optional
- Can adjust 60 degree
- 30W and 38W changeable
- 5 Years replacment warranty

Dimensions

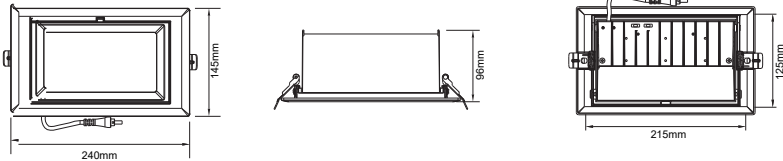

SFS009-TC


Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material		CCT		
SFS009-BKTC3832S01	9360338001195	30W/38W	30W:3306lm	240*145*96mm	215*125mm	BK	Aluminum	60°	3000K&4000K&5700K	6 PCS/CTN	355*290*385mm
SFS009-WHTC3832S01	9360338001188	30W/38W	38W:4221lm	240*145*96mm	215*125mm	WH	Aluminum	60°	3000K&4000K&5700K	6 PCS/CTN	355*290*385mm

AVIOR 5 Series




LED RECESSED DOWNLIGHT

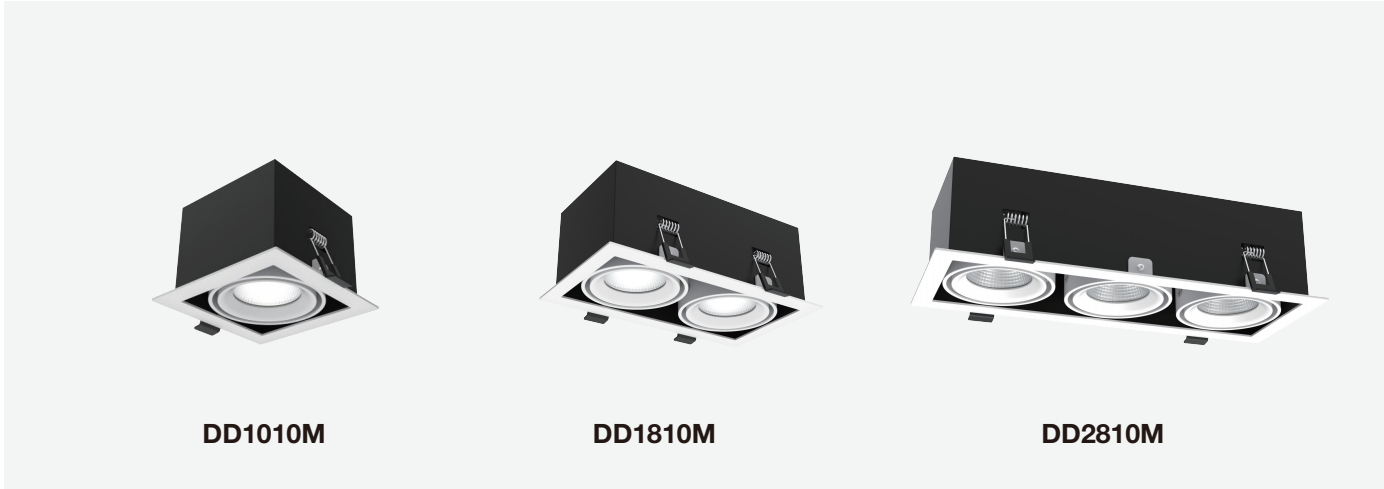


Product Features

- Commercial grade quality and design
- DALI2 optional
- Separate driver
- With built-out driver and Australian standard plug
- Die-cat Aluminum heat sink
- 3 years replacement warranty


Dimensions

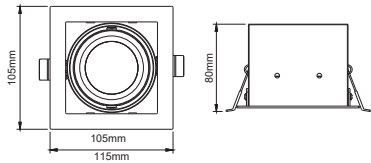

DD1010M



DD1810M

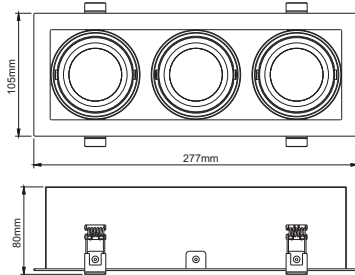

DD2810

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box Size
DD1010M-WHTC10C02	9360338001225	10W	872lm	105*105*H80mm	95*95mm	WH	Aluminum	60°	3000K&4000K&5700K	18 PCS/CTN	405*360*295mm
DD1010M-BKTC10C02	9360338007432	10W	872lm	105*105*H80mm	95*95mm	BK	Aluminum	60°	3000K&4000K&5700K	18 PCS/CTN	405*360*295mm
DD1810M-WHTC2010C02	9360338001232	20W	1798lm	185*105*H80mm	175*95mm	WH	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	435*275*430mm
DD1810M-BKTC2010C02	9360338007449	20W	1798lm	185*105*H80mm	175*95mm	BK	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	435*275*430mm
DD2810M-WHTC30C02	9360338001249	30W	2751lm	277*105*H80mm	265*95mm	WH	Aluminum	60°	3000K&4000K&5700K	9 PCS/CTN	405*320*430mm
DD2810M-BKTC30C02	9360338007456	30W	2751lm	277*105*H80mm	265*95mm	BK	Aluminum	60°	3000K&4000K&5700K	9 PCS/CTN	405*320*430mm


SPOT LIGHT Series



LED SPOT LIGHT



DL694002



White

Black



Product Features

- Eaglerise driver
- 3 years replacement warranty

Dimensions



DL694002

Technical Specification

Model	W	lm	Size	Cutout	Color	Material	Beam	CCT	Pack	Box
DL694002-3KBK	4W	100lm/W	75*45*50mm	67*37mm	BK	Aluminum	24°	3000K	50 PCS/CTN	520*200*320mm
DL694002-3KWH	4W	100lm/W	75*45*50mm	67*37mm	WH	Aluminum	24°	3000K	50 PCS/CTN	520*200*320mm
DL694002-4KBK	4W	100lm/W	75*45*50mm	67*37mm	BK	Aluminum	24°	4000K	50 PCS/CTN	370*310*370mm
DL694002-4KWH	4W	100lm/W	75*45*50mm	67*37mm	WH	Aluminum	24°	4000K	50 PCS/CTN	420*360*295mm


LED SPOT LIGHT



Product Features

- Eaglerise driver
- 3 years replacement warranty

Dimensions



DL694005

Technical Specification

Model	W	lm	Size	Cutout	Color	Material		CCT		
DL694005-3KBK	10W	100lm/W	147*45*50mm	139*37mm	BK	Aluminum	24°	2700K	50 PCS/CTN	420*360*295mm
DL694005-3KWH	10W	100lm/W	147*45*50mm	139*37mm	WH	Aluminum	24°	2700K	50 PCS/CTN	420*360*295mm
DL694005-4KBK	10W	100lm/W	147*45*50mm	139*37mm	BK	Aluminum	24°	4000K	50 PCS/CTN	420*360*295mm
DL694005-4KWH	10W	100lm/W	147*45*50mm	139*37mm	WH	Aluminum	24°	4000K	50 PCS/CTN	420*360*295mm

LED SPOT LIGHT



White Black

AC 220V

CRI 90

SMD


IP20

IC-4

Product Features

- Eaglerise driver
- 3 years replacement warranty

Dimensions



DL6940010

Technical Specification

Model	W	lm	Size	Cutout	Color	Material		CCT		
DL6940010-3KBK	20W	100lm/W	279*45*50mm	272*37mm	BK	Aluminum	24°	3000K	30 PCS/CTN	570*325*260mm
DL6940010-3KWH	20W	100lm/W	279*45*50mm	272*37mm	WH	Aluminum	24°	3000K	30 PCS/CTN	570*325*260mm
DL6940010-4KBK	20W	100lm/W	279*45*50mm	272*37mm	BK	Aluminum	24°	4000K	30 PCS/CTN	570*325*260mm
DL6940010-4KWH	20W	100lm/W	279*45*50mm	272*37mm	WH	Aluminum	24°	4000K	30 PCS/CTN	570*325*260mm

LED SPOT LIGHT




Black



Product Features

- IP20 Rating
- Low glare UGR<19
- 3 Years Warranty
- For home, office, store, super market, cafes, exhibition, halls, museum hotel, restaurant etc

Dimensions



DL13-BK

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packing	Box Size
DL13-BK3K3S03	9360338009818	3W	135lm	Ø38*39mm	Ø30mm	BK	Aluminum	16°	3000K	100 PCS/CTN	410*410*430mm
DL13-BK4K3S03	9360338009825	3W	135lm	Ø38*39mm	Ø30mm	BK	Aluminum	16°	4000K	100 PCS/CTN	410*410*430mm

LED SPOT LIGHT



White

Product Features

- PF>0.4
- IP20 Rating
- Low glare UGR<19
- 3 Years Warranty
- For home, office, store, super market, cafes, exhibition, halls, museum hotel, restaurant etc

Dimensions




DL23-WH

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Box Size
DL23-WH3K3S03	9360338009832	3W	135lm	Ø40*60mm	Ø35mm	WH	Aluminum	16°	3000K	100 PCS/CTN	410*410*430mm
DL23-WH4K3S03	9360338009849	3W	135lm	Ø40*60mm	Ø35mm	WH	Aluminum	16°	4000K	100 PCS/CTN	410*410*430mm

LED SURFACE MOUNT DOWN LIGHT SERIES

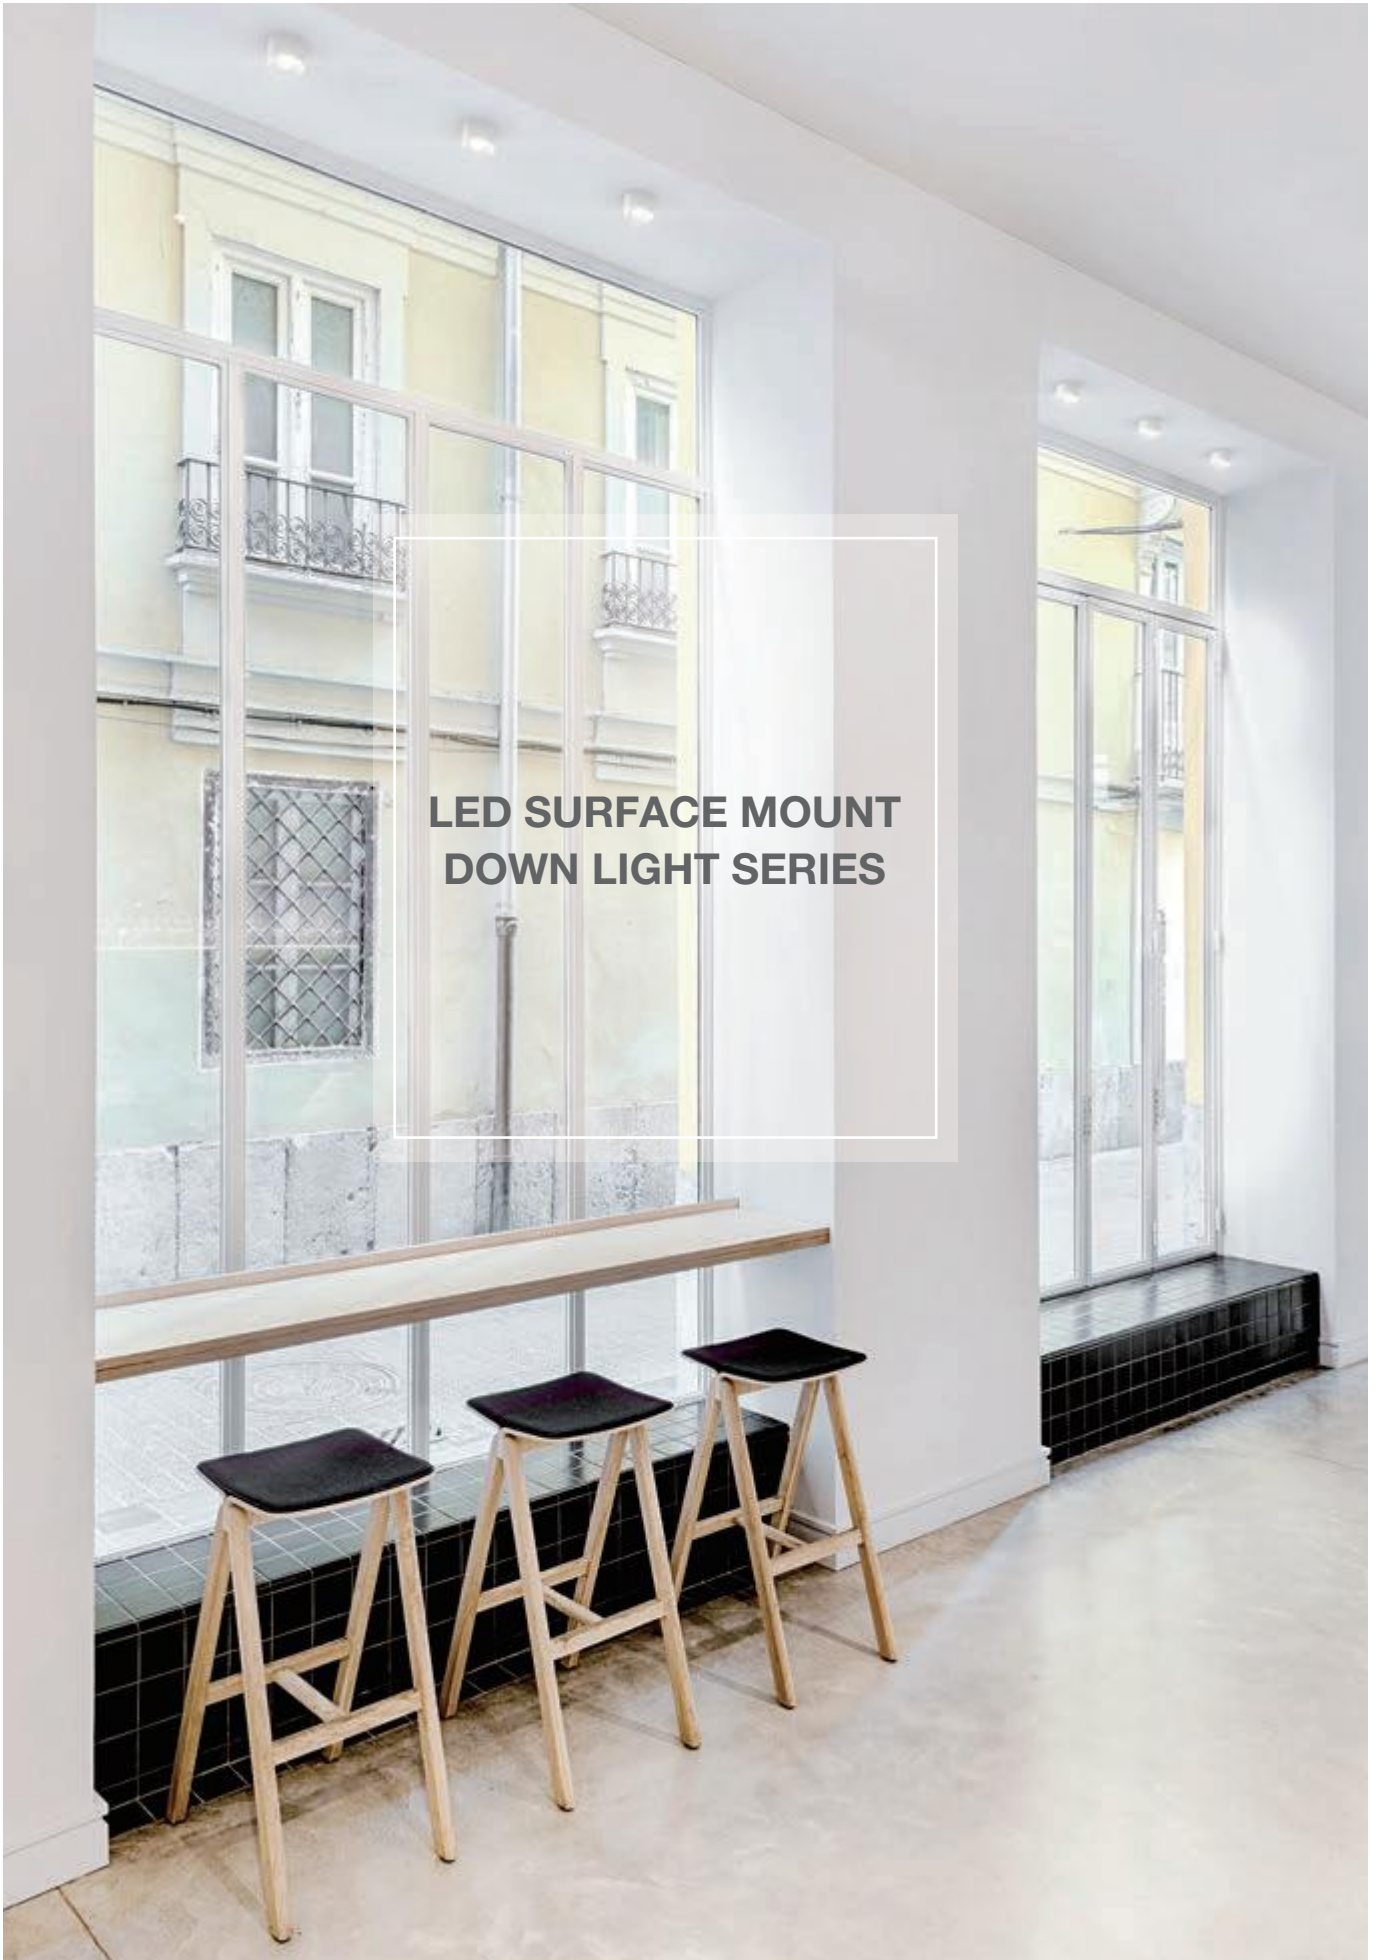

PROPUS

Series

CRI>90

IP54 waterproof

Tri-color dimmbale



LED SURFACE MOUNT DOWN LIGHT SERIES




Product Features

- Low UGR
- Commercial grade quality and design
- Dimmable with trailing edge and universal dimmer
- Made with High efficiency LED chip and translucent diffuser
- Easy installation
- 3 years replacement warranty

Applications

- Home,Shop,hotel,restaurant and office etc


Dimensions

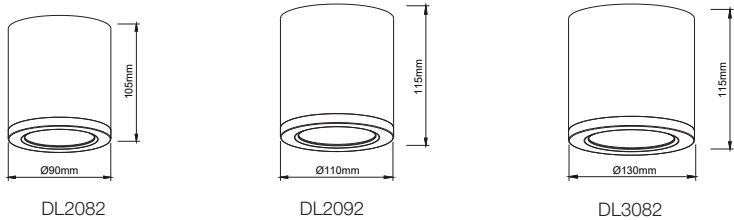

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL2082-WHTC15C01	9360338011156	15W	1445lm	Ø90-H105mm	WH	Aluminum	60°	3000K&4000K&5000K	18 PCS/CTN	300*300*255mm
DL2082-BKTC15C01	9360338011149	15W	1445lm	Ø90-H105mm	BK	Aluminum	60°	3000K&4000K&5000K	18 PCS/CTN	300*300*255mm
DL2092-WHTC20C01	9360338001607	20W	2377lm	Ø110-H115mm	WH	Aluminum	60°	3000K&4000K&5000K	12 PCS/CTN	425*285*315mm
DL2092-BKTC20C01	9360338001591	20W	2377lm	Ø110-H115mm	BK	Aluminum	60°	3000K&4000K&5000K	12 PCS/CTN	425*285*315mm
DL3082-WHTC30C01	9360338001621	30W	3268lm	Ø130-H115mm	WH	Aluminum	60°	3000K&4000K&5700K	8 PCS/CTN	325*325*315mm
DL3082-BKTC30C01	9360338001614	30W	3268lm	Ø130-H115mm	BK	Aluminum	60°	3000K&4000K&5700K	8 PCS/CTN	325*325*315mm


LED SURFACE MOUNT DOWN LIGHT SERIES




Product Features

- High Lumen , commercial grade quality and design
- Dimmable with trailing edge and universal dimmer
- 3 years replacement warranty


Dimensions




DL1066



DL10196



DL20096



DL30096

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL1066-WHTC10S01S	9360338001348	10W	1200lm	Ø114*H70mm	WH	Aluminum	100°	3000K&4000K&5700K	16 PCS/CTN	255*255*325mm
DL1066-BKTC10S01S	9360338007388	10W	1200lm	Ø114*H70mm	BK	Aluminum	100°	3000K&4000K&5700K	16 PCS/CTN	255*255*325mm
DL10196-WHTC15S01S	9360338001355	15W	1800lm	Ø149*H75mm	WH	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	325*325*265mm
DL10196-BKTC15S01S	9360338007395	15W	1800lm	Ø149*H75mm	BK	Aluminum	100°	3000K&4000K&5700K	12 PCS/CTN	325*325*265mm
DL20096-WHTC20S01S	9360338001362	20W	2400lm	Ø169*H75mm	WH	Aluminum	100°	3000K&4000K&5700K	8 PCS/CTN	365*365*185mm
DL20096-BKTC20S01S	9360338007401	20W	2400lm	Ø169*H75mm	BK	Aluminum	100°	3000K&4000K&5700K	8 PCS/CTN	365*365*185mm
DL30096-WHTC30S01S	9360338001379	30W	3600lm	Ø199*H75mm	WH	Aluminum	100°	3000K&4000K&5700K	6 PCS/CTN	425*220*265mm
DL30096-BKTC30S01S	9360338007418	30W	3600lm	Ø199*H75mm	BK	Aluminum	100°	3000K&4000K&5700K	6 PCS/CTN	425*220*265mm

LED SURFACE MOUNT DOWN LIGHT SERIES




White Black



Product Features

- Eco-friendly COB light source
- Low glare UGR<19
- For home,office,store,super market,bars,cafes,exhibition,halls, museum hotel,restaurant etc.

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packing	Dimension
DD1541-WHTC10C02	9360338007562	10W	840lm	Ø100*70mm	WH	Aluminum	24°	3000K&4000K&5000K	18 PCS/CTN	345*235*280mm
DD1541-BKTC10C02	9360338007579	10W	840lm	Ø100*70mm	BK	Aluminum	24°	3000K&4000K&5000K	18 PCS/CTN	345*235*280mm


LED SURFACE MOUNT DOWN LIGHT SERIES



Product Features

- Eco-friendly COB light source
- Low glare UGR<19
- For home,office,store,super market,bars,cafes,exhibition,halls, museum hotel,restaurant etc

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
DD1542-WHTC10C02	9360338007753	10W	840lm	Ø100*65mm	WH	Aluminum	24°	3000K&4000K&5000K	50 PCS/CTN	575×235×422mm
DD1542-BKTC10C02	9360338007760	10W	840lm	Ø100*65mm	BK	Aluminum	24°	3000K&4000K&5000K	50 PCS/CTN	575×235×422mm

Front Ring



LED SURFACE MOUNT DOWN LIGHT SERIES



White




Black



Product Features

- Folding lamp design
- Rotates freely in all directions, Angle with vertically 90° and horizontally 350°
- Eco-friendly COB light source
- Low glare UGR<19
- For home, office, store, super market, bars, cafes, exhibition, halls, museum hotel, restaurant etc

Dimensions



DL3017



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DL3017-WHTC12C02	9360338007500	12W	1008lm	Ø100*100mm	WH	Aluminum	24°	3000K&4000K&5000K	30 PCS/CTN	550x225x475mm
DL3017-BKTC12C02	9360338007517	12W	1008lm	Ø100*100mm	BK	Aluminum	24°	3000K&4000K&5000K	30 PCS/CTN	550x225x475mm
DL3017-WHGD12C02G	9360338007524	12W	1008lm	Ø100*100mm	WH+GD	Aluminum	24°	3000K&4000K&5000K	30 PCS/CTN	550x225x475mm
DL3017-BKGD12C02G	9360338007531	12W	1008lm	Ø100*100mm	BK+GD	Aluminum	24°	3000K&4000K&5000K	30 PCS/CTN	550x225x475mm

Front Ring




LED SURFACE MOUNT DOWN LIGHT SERIES

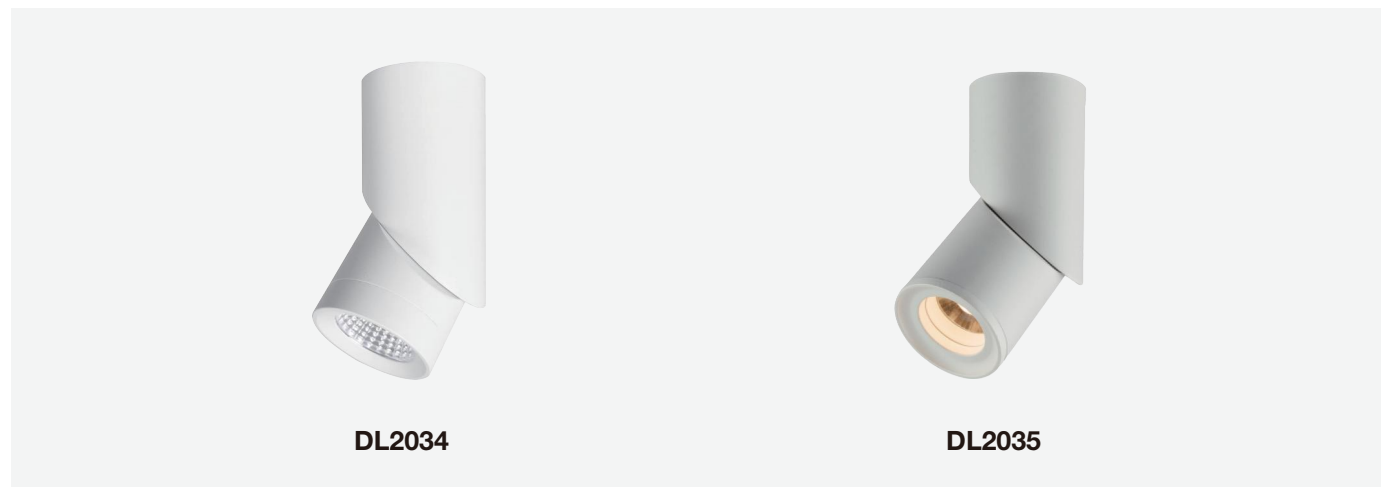

Product Features

- Die-cast aluminum lamp body, excellent heat dissipation
- For hotels, homes, offices, shop, etc. It is also widely used for public areas such as stairways, lobbies, reception, corridors, etc.
- 3 years replacement warranty

Dimensions

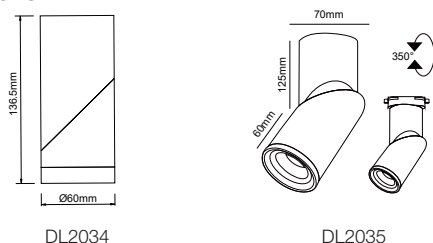

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Box Size
DL2034-BK3K12C02	9360338001638	12W	780lm	Ø60*H136.5mm	BK	Aluminum	36°	3000K	30 PCS/CTN	350*210*320mm
DL2034-WH3K12C02	9360338001652	12W	780lm	Ø60*H136.5mm	WH	Aluminum	36°	3000K	30 PCS/CTN	350*210*320mm
DL2034-BK4K12C02	9360338001645	12W	780lm	Ø60*H136.5mm	BK	Aluminum	36°	4000K	30 PCS/CTN	350*210*320mm
DL2034-WH4K12C02	9360338001669	12W	780lm	Ø60*H136.5mm	WH	Aluminum	36°	4000K	30 PCS/CTN	350*210*320mm
DL2035-WHTC18C02	9360338009016	18W	1305lm	Ø70*H185mm	WH	Aluminum	38°	3000K&4000K&5700K	12 PCS/CTN	320*240*215mm
DL2035-BKTC18C02	9360338009023	18W	1305lm	Ø70*H185mm	BK	Aluminum	38°	3000K&4000K&5700K	12 PCS/CTN	320*240*215mm

LED SURFACE MOUNT DOWN LIGHT SERIES



DL1562-GD




Golden




Product Features

- DIY Design Various colours and mounting options available
- Dimming: Triac dim
- Internal flicker free driver
- Installation way: surface mounted
- Adjustable Three color temperatures: WW,NW,CW three options
- For supermarket, specialty store,show window,exhibition hall,etc

Dimensions



Installation

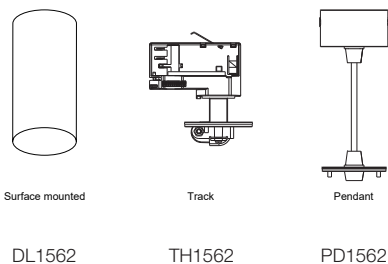

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam angle	CCT	Package	Size
DL1562-GDTC15C02	9360338009580	15W	1150lm	Ø61.5*175mm	Golden	Aluminum	60°	3000K&4000K&5700K	16 PCS/CTN	360*360*225mm

Colour




LED SURFACE MOUNT DOWN LIGHT SERIES



Product Features

- Flicker-free driver to create healthy lighting environment
- Compatible with leading and trailing edge phase cut dimmers
- Patented surface mounted box gives better friction on rotation and create pleasant gear noise
- Variety of less-glare optic options
- 3 years replacment guarantee

Dimensions

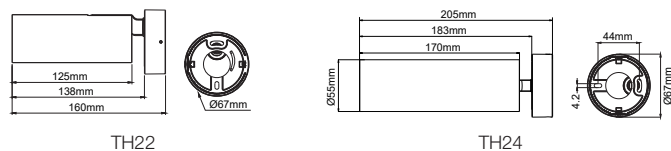

Technical Specification

Model	Barcode	W	Im	Size	Color	Material		CCT		
TH22-WH3K10C02	9360338001690	10W	719lm	L170*Ø50*160mm	WH	Die-cat Aluminum 60°	3000K		25 PCS/CTN	L565*W440*H240cm
TH22-BK3K10C02	9360338001706	10W	719lm	L170*Ø50*160mm	BK	Die-cat Aluminum 60°	3000K		25 PCS/CTN	L565*W440*H240cm
DL24-WH5C15C02	9360338001713	15W	835-1000lm	L170*Ø55*205mm	WH	Die-cat Aluminum 60°	2700K/3000K/4000K/5000K/57000K	20 PCS/CTN	L440*W427*H285cm	
DL24-BK5C15C02	9360338001720	15W	835-1000lm	L170*Ø55*205mm	BK	Die-cat Aluminum 60°	2700K/3000K/4000K/5000K/57000K	20 PCS/CTN	L440*W427*H285cm	



LED PENDANTS SERIES




 Golden



Product Features

- DIY Design Various colours and mounting options available
- Dimming: Triac dim
- Internal flicker free driver
- Installation way: pendant
- Adjustable Three color temperatures: WW, NW, CW three options
- For supermarket, specialty store, show window, exhibition hall, etc

Dimensions




PD1562

Installation




Surface mounted

DL1562



Track

TH1562



Pendant

PD1562

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packing	Box Size
-------	---------	---	----	------	-------	----------	------------	-----	---------	----------

PD1562-GDTC15C02	9360338009573	15W	1150lm	Ø61.5*1200mm	GD	Aluminum	60°	3000K&4000K&5700K	16 PCS/CTN	455*335*385mm
------------------	---------------	-----	--------	--------------	----	----------	-----	-------------------	------------	---------------

Colour




LED PENDANTS SERIES



Product Features

- DALI2 optional
- Die-cast aluminium
- Commercial grade quality and design
- Made with LM-80 certified Bridgelux COB LED chips

Dimensions

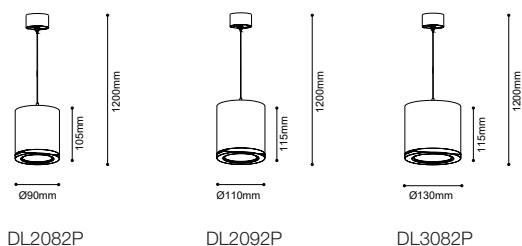

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Pcs/CTN	Box Size (mm)
DL2082-WHTC15C01P	9360338002246	15W	1445lm	Ø90*H1200mm	WH	Aluminum	60°	3000K&4000K&5700K	18 PCS/CTN	465*355*385mm
DL2082-BKTC15C01P	9360338002253	15W	1445lm	Ø90*H1200mm	BK	Aluminum	60°	3000K&4000K&5700K	18 PCS/CTN	465*355*385mm
DL2092-WHTC20C01P	9360338002260	18W	2377lm	Ø110*H1200mm	WH	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	495*405*305mm
DL2092-BKTC20C01P	9360338002277	18W	2377lm	Ø110*H1200mm	BK	Aluminum	60°	3000K&4000K&5700K	12 PCS/CTN	495*405*305mm
DL3082-WHTC30C01P	9360338002284	30W	3269lm	Ø130*H1200mm	WH	Aluminum	60°	3000K&4000K&5700K	8 PCS/CTN	445*335*345mm
DL3082-BKTC30C01P	9360338002291	30W	3269lm	Ø130*H1200mm	BK	Aluminum	60°	3000K&4000K&5700K	8 PCS/CTN	445*335*345mm



MUSICA Series

Multi-Accessory

Stock saving

ECO



Honeycomb mesh



Anti-glare cylinder




Anti-glare bevel



Barn doors


LED TRACK LIGHT SERIES

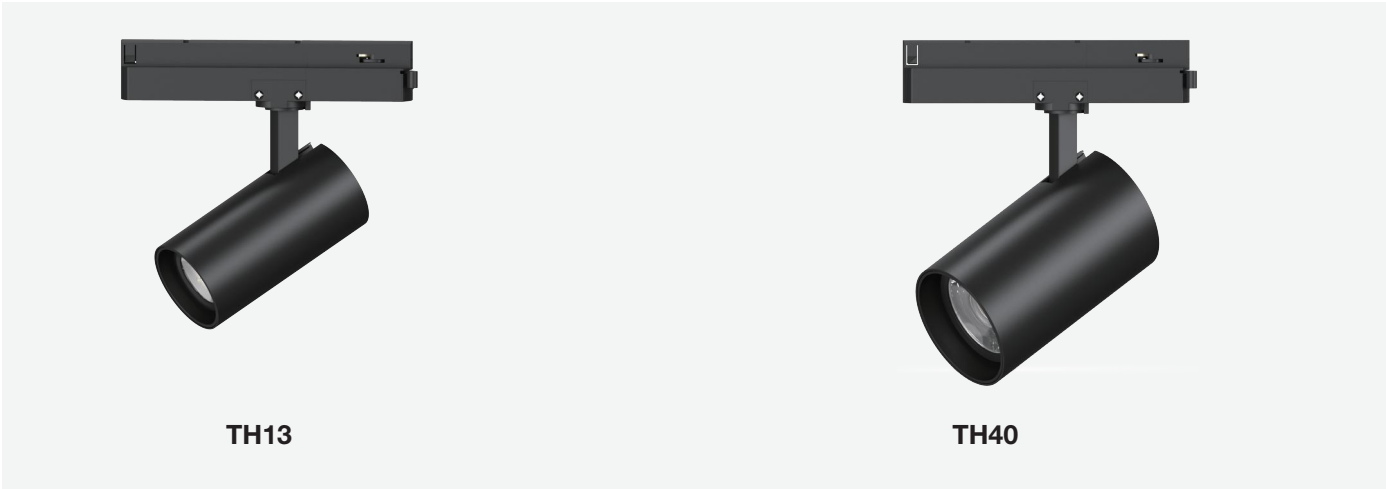

Product Features

- Flicker-free driver.
- Dimming way: Triac dim.
- Highly quality LED source.
- Angle with vertically 90°and horizontally 350°.
- 3 Wire 1 circuit track adaptor
- For supermarket, specialty store, show window, exhibition hall, museum etc.

Dimensions

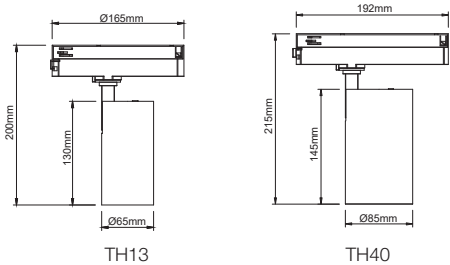

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Angle	CCT	Packaging	Dimensions
TH13-WHTC15C021P	9360338007494	15W	1986lm	170*Ø65*195mm	WH	Aluminum	55°	3000K&4000K&5700K	16 PCS/CTN	400*365*335mm
TH13-BKTC15C021P	9360338007487	15W	1986lm	170*Ø65*195mm	BK	Aluminum	55°	3000K&4000K&5700K	16 PCS/CTN	400*365*335mm
TH40-WHTC40C021P	9360338006893	40W	4098lm	170*Ø85*210mm	WH	Aluminum	55°	3000K&4000K&5700K	12 PCS/CTN	405*405*315mm
TH40-BKTC40C021P	9360338006909	40W	4098lm	170*Ø85*210mm	BK	Aluminum	55°	3000K&4000K&5700K	12 PCS/CTN	405*405*315mm

Accessories




LED TRACK LIGHT SERIES



Product Features

- Flicker-free driver.
- Dimming way: Triac dim.
- Highly quality LED source.
- Angle with vertically 90°and horizontally 350°.
- 4 wire 3 circuit track adaptor
- For supermarket, specialty store, show window, exhibition hall, museum etc.

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Package	Dimension
TH41-WHTC40C023P	9360338006916	40W	4098lm	170*Ø85*210mm	WH	Aluminum	55°	3000K&4000K&5700K	12 PCS/CTN	405*405*315mm
TH41-BKTC40C023P	9360338006923	40W	4098lm	170*Ø85*210mm	BK	Aluminum	55°	3000K&4000K&5700K	12 PCS/CTN	405*405*315mm

Accessories



Honeycomb mesh






Anti-glare cylinder



Anti-glare bevel




Bern doors

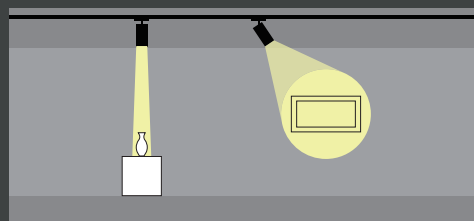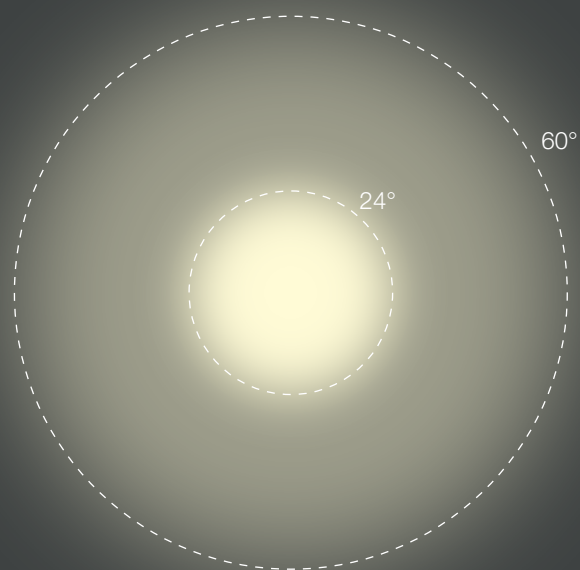

80%~100% dimmable
Tri-CCT changeable




Adjustable Beam Angle



Brightness Adjustment

(BJ21: 20W&25W&30W BJ31: 25W&30W&35W)

LED TRACK LIGHT SERIES




Product Features

- Arbitrary adjustment within the range of 24°-60°
- Adjustable Three color temperatures: WW, NW, CW three options
- Angle with vertically 90° and horizontally 350°
- 3 wire 1 circuit track adaptor



Dimensions

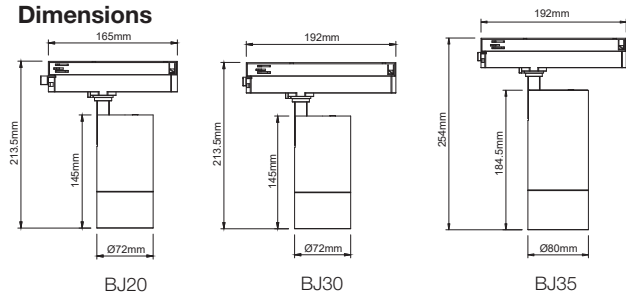

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packing	Net Weight
BJ20-WHTC20C02	9360338007654	20W	2328lm	170*Ø72*210mm	WH	Aluminium	24-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ20-BKTC20C02	9360338007661	20W	2328lm	170*Ø72*210mm	BK	Aluminium	24-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ30-WHTC30C02	9360338007678	30W	2980lm	170*Ø72*210mm	WH	Aluminium	24-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ30-BKTC30C02	9360338007685	30W	2980lm	170*Ø72*210mm	BK	Aluminium	24-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ35-WHTC35C02	9360338007692	35W	3373lm	170*Ø80*250mm	WH	Aluminium	24-60°	3000K&4000K&5700K	12 PCS/CTN	505*400*325 mm
BJ35-BKTC35C02	9360338007708	35W	3373lm	170*Ø80*250mm	BK	Aluminium	24-60°	3000K&4000K&5700K	12 PCS/CTN	505*400*325 mm

LED TRACK LIGHT SERIES




Product Features

- Arbitrary adjustment within the range of 24°-60°
- Adjustable Three color temperatures: WW, NW, CW three options
- Angle with vertically 90°and horizontally 350°
- 4 wire 3 circuit track adaptor



Dimensions

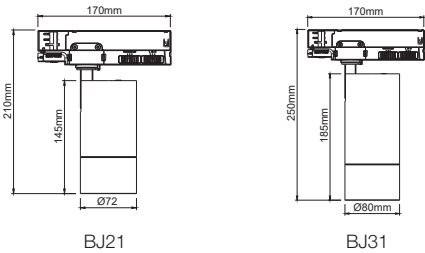

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packing	Dimensions
BJ21-WHTC20C023P	9360338008880	20W	1823lm	170*Ø72*210mm	WH	Aluminium	24°-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ21-BKTC20C023P	9360338008897	20W	1823lm	170*Ø72*210mm	BK	Aluminium	24°-60°	3000K&4000K&5700K	16 PCS/CTN	425*380*395 mm
BJ31-WHTC30C023P	9360338008866	35W	3298lm	170*Ø80*250mm	WH	Aluminium	24°-60°	3000K&4000K&5700K	12 PCS/CTN	505*400*325 mm
BJ31-BKTC30C023P	9360338008873	35W	3298lm	170*Ø80*250mm	BK	Aluminium	24°-60°	3000K&4000K&5700K	12 PCS/CTN	505*400*325 mm



DIY Design

Various colours and
mounting options available



Surface mounted




Track



Pendant


LED TRACK LIGHT SERIES

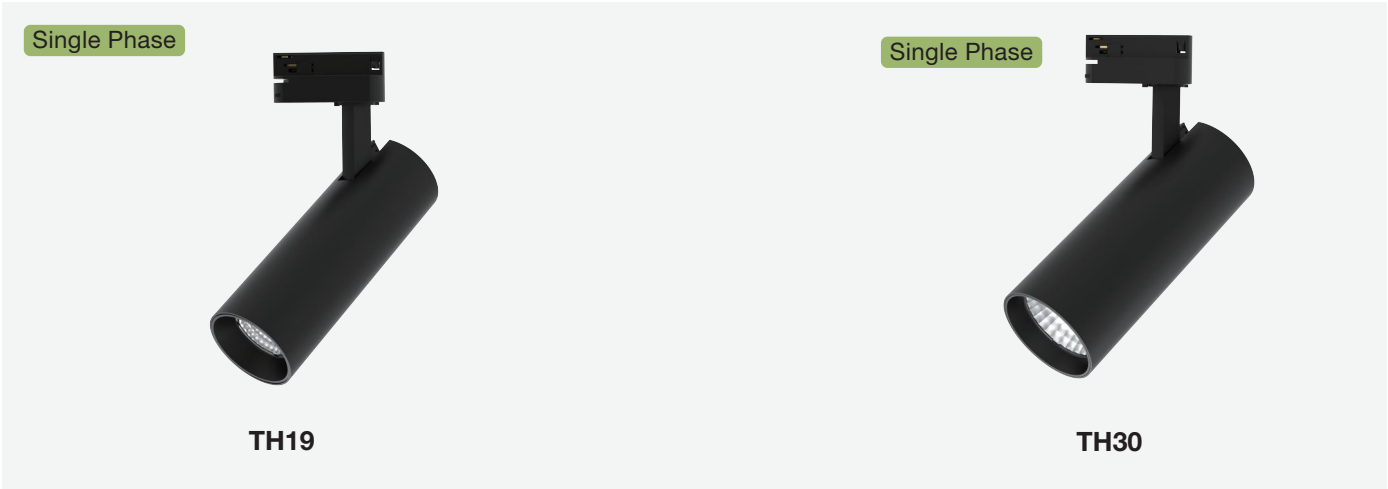

Product Features

- Dimming way: Triac dim.
- Adjustable Three color temperatures: WW, NW, CW three options.
- Angle with vertically 90°and horizontally 350°.
- Internal flicker free driver.
- 3 wire 1 circuit track adaptor
- For supermarket, specialty store, show window, exhibition hall, museum etc.


Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam angle	CCT	Package	Box size
TH19-WHTC15C021P	9360338006411	15W	1200lm	175*Ø62*240mm	WH	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	465*375*290mm
TH19-BKTC15C021P	9360338006404	15W	1200lm	175*Ø62*240mm	BK	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	465*375*290mm
TH30-WHTC30C021P	9360338006497	30W	2677lm	185*Ø72*250mm	WH	Aluminum	60°	3000K&4000K&5700K	16 PCS/CTN	415*415*300mm
TH30-BKTC30C021P	9360338006480	30W	2677lm	185*Ø72*250mm	BK	Aluminum	60°	3000K&4000K&5700K	16 PCS/CTN	415*415*300mm
TH1562-GDTC15C023P9360338009597		15W	1200lm	175*Ø62*240mm	Golden	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	465*375*290mm


Installation

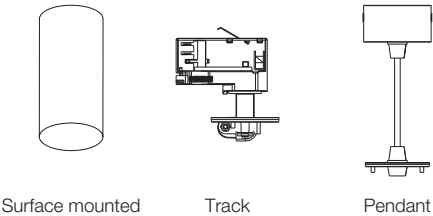

Colour




LED TRACK LIGHT SERIES

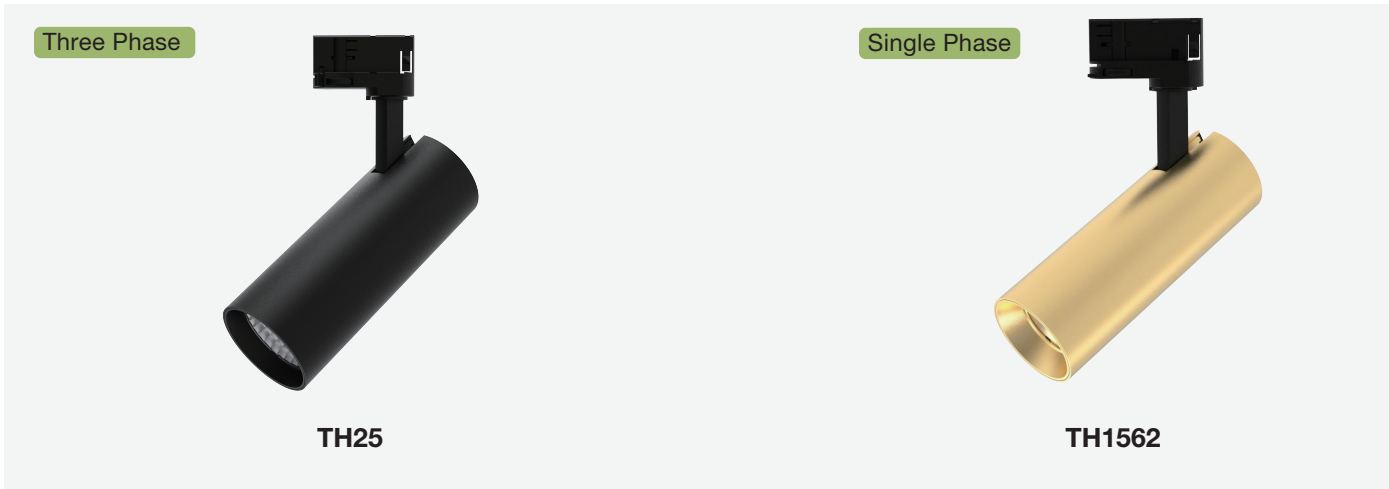

Product Features

- CRI 90
- Dimming way: Triac dim
- Adjustable lighting orientation with 350° in horizontal direction and 90 in vertical direction.
- 4 Wire 3 circuit track adaptor
- 3 Years Replacement Warranty


Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
TH25-WHTC30C023P	9360338008972	30W	2677lm	185*Ø72*250mm	WH	Aluminium	60°	3000K&4000K&5700K	16 PCS/CTN	415*415*300 mm
TH25-BKTC30C023P	9360338008965	30W	2677lm	185*Ø72*250mm	BK	Aluminium	60°	3000K&4000K&5700K	16 PCS/CTN	415*415*300 mm
TH1562-GDTC15C023P	9360338009597	15W	1200lm	175*Ø62*240mm	Golden	Aluminum	60°	3000K&4000K&5700K	20 PCS/CTN	465*375*290mm

Installation

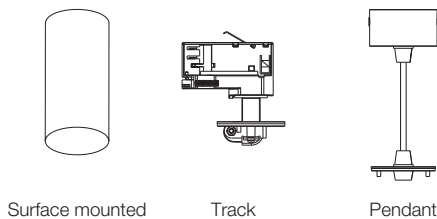

Colour




LED TRACK LIGHT SERIES



Product Features

- Variety of less-glare optic options
- Compatible with leading and trailing edge phase cut dimmers
- Thoughtful friction on the track arm, get rid of loose trackarm experience
- Special feature: TH14 (5CC, 1 or 3 phase), Th15 (CREE CHIP)
- 3 years replacement warranty

Dimensions

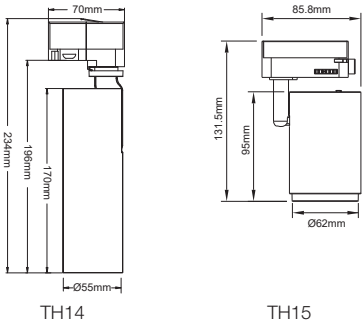

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	PF		
TH14-BK5C15C021P	9360338006237	15W	869-1001lm	170*Ø55*234mmBK	Die-cast Aluminium 60°	2700K/3000K/4000K/5000K/5700K	0.95	20PCS/CTN440*427*285mm			
TH14-WH5C15C021P	9360338006244	15W	869-1001lm	170*Ø55*234mmWH	Die-cast Aluminium 60°	2700K/3000K/4000K/5000K/5700K	0.95	20PCS/CTN440*427*285mm			
TH14-BK5C15C023P	9360338007609	15W	869-1001lm	170*Ø55*234mmBK	Die-cast Aluminium 60°	2700K/3000K/4000K/5000K/5700K	0.95	20PCS/CTN440*427*285mm			
TH14-WH5C15C023P	9360338007616	15W	869-1001lm	170*Ø55*234mmWH	Die-cast Aluminium 60°	2700K/3000K/4000K/5000K/5700K	0.95	20PCS/CTN440*427*285mm			
TH15-WHTC15C011P	9360338006855	15W	980-1060lm	95*Ø62*131.5mmWH	Die-cast Aluminium 60°	3000K/4000K/5000K		0.9	50PCS/CTN565*390*370mm		
TH15-BKTC15C011P	9360338006862	15W	980-1060lm	95*Ø62*131.5mmBK	Die-cast Aluminium 60°	3000K/4000K/5000K		0.9	50PCS/CTN565*390*370mm		

LED TRACK LIGHT SERIES



Product Features

- Variety of less-glare optic options
- Compatible with leading and trailing edge phase cut dimmers
- Thoughtful friction on the track arm, get rid of loose trackarm experience
- Special feature: 5CCT Changeable; Flicker free
- 5 years replacement warranty

Dimensions



TH26

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
TH26-BK5CDP2025C021P9360338010395	20/25W 1543-1709lm(25w)	L185mm*H242mm	BK	Aluminium	60°	2700K/3000K/4000K/5000K/5700K	5 PCS/CTN	440*345*310mm		
TH26-WH5CDP2025C021P9360338010401	20/25W 1195-1404lm(20w)	L185mm*H242mm	WH	Aluminium	60°	2700K/3000K/4000K/5000K/5700K	5 PCS/CTN	440*345*310mm		

LED TRACK LIGHT SERIES




TH3017



Product Features

- Folding lamp design
- Rotates freely in all directions,Angle with vertically 90° and horizontally 350°
- Eco-friendly COB light source
- Low glare UGR<19
- For home,office,store,super market,bars,cafes,exhibition,halls, museum hotel,restaurant etc

Dimensions



TH3017


Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
TH3017-WHTC12C02	9360338007548	12W	1008lm	Ø100*100mm	WH	Aluminum	36°	3000K&4000K&5000K	30 PCS/CTN	550x220x450mm
TH3017-BKTC12C02	9360338007555	12W	1008lm	Ø100*100mm	BK	Aluminum	36°	3000K&4000K&5000K	30 PCS/CTN	550x220x450mm

Front Ring




LED TRACK LIGHT SERIES



Product Features

- Folding lamp design
- Rotates freely in all directions, Angle with vertically 90° and horizontally 350°
- Eco-friendly COB light source
- Low glare UGR<19
- For home, office, store, super market, bars, cafes, exhibition, halls, museum hotel, restaurant etc

Dimensions



DL2035



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam angle	CCT	Packaging	Dimensions
DL2035-WHTC18C02	9360338009016	18W	1305lm	Ø70*185mm	WH	Aluminum	38°	3000K&4000K&5700K	12 PCS/CTN	320x240x215mm
DL2035-BKEC18C02	9360338009023	18W	1305lm	Ø70*185mm	BK	Aluminum	38°	3000K&4000K&5700K	12 PCS/CTN	320x240x215mm



GU10

LED TRACK LIGHT SERIES




Product Features (TH11)

- GU10
- Rotates freely in all directions,
Angle with vertically 90°and horizontally 350°
- For home, office, store, super market, bars, cafes, exhibition, halls,
museum hotel, restaurant etc.

Product Features (TH16)

- 3 wire adaptor
- Aluminum housing with great thermal management.
- GU10 LAMP BASE
- Angle with vertically90° and horizontally 350°
- 3 years replacement warranty

Dimensions

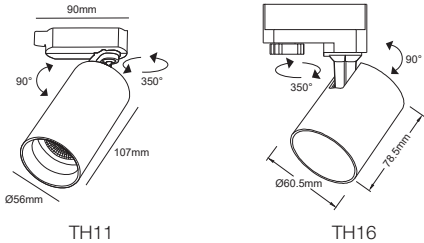

Technical Specification

Model	Barcode	Size	Color	Material		
TH11-BKGU10	9360338011170	Ø56*107 mm	BK	Aluminum	50 PCS/CTN	455*350*360 mm
TH11-WHGU10	9360338011187	Ø56*107 mm	WH	Aluminum	50 PCS/CTN	455*350*360 mm
TH11-GDGU10	9360338011194	Ø56*107 mm	GD	Aluminum	50 PCS/CTN	455*350*360 mm
TH11-DRGU10	9360338011200	Ø56*107 mm	DR	Aluminum	50 PCS/CTN	455*350*360 mm
TH16-WHGU10	9360338006299	Ø60.5*119*135 mm	WH	Aluminum	50 PCS/CTN	420*275*350 mm
TH16-BKGU10	9360338006282	Ø60.5*119*135 mm	BK	Aluminum	50 PCS/CTN	420*275*350 mm


Accessories




GU10

LED TRACK LIGHT SERIES

Three Wires Track System

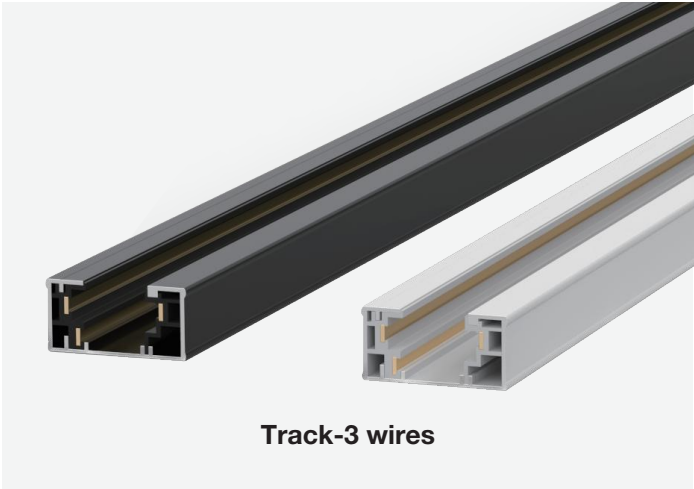

Dimensions






White



Black

Technical Specification

Model	Barcode	Length	Current	Load Bearing	AC	Color		
TRACK-1M-BK-3WIRE	9360338006138	1M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	1025*202*102mm
TRACK-1M-WH-3WIRE	9360338006145	1M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	1025*202*102mm
TRACK-2M-BK-3WIRE	9360338006091	2M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	2025*202*102mm
TRACK-2M-WH-3WIRE	9360338006107	2M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	2025*202*102mm
TRACK-3M-BK-3WIRE	9360338006114	3M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	3025*202*102mm
TRACK-3M-WH-3WIRE	9360338006121	3M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	3025*202*102mm








Technical Specification







Model	Barcode	Current	AC	Color		
END CAP & CENTER FEED-BK-3WIRE	9360338011262	10A	220-240V,50/60Hz	Black	150 PCS/CTN	340*210*180mm
END CAP & CENTER FEED-WH-3WIRE	9360338006053	10A	220-240V,50/60Hz	White	150 PCS/CTN	340*210*180mm
STRAIGHT CONNECTOR-3WIRE	9360338011279	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	380*210*220mm
MINI JOINER-3WIRE	9360338006060	10A	220-240V,50/60Hz	White/Black	200 PCS/CTN	340*210*180mm

LED TRACK LIGHT SERIES

Three Wires Track System

**L-Feed-L-3 wires****L-Feed-R-3 wires****Flexible Connector-3 wires****Technical Specification**






Model	Barcode	Current	AC	Color		
L-FEED-L-BK-3WIRE	9360338011286	10A	220-240V,50/60Hz	Black	100 PCS/CTN	380*210*220mm
L-FEED-L-WH-3WIRE	9360338006015	10A	220-240V,50/60Hz	White	100 PCS/CTN	380*210*220mm
L-FEED-R-BK-3WIRE	9360338011293	10A	220-240V,50/60Hz	Black	100 PCS/CTN	380*210*220mm
L-FEED-R-WH-3WIRE	9360338011309	10A	220-240V,50/60Hz	White	100 PCS/CTN	380*210*220mm
FLEXIBLE CONNECTOR-3WIRE	9360338011316	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm

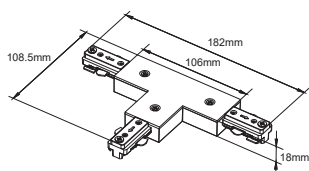**T-Feed-L1-3 wires****T-Feed-L2-3 wires****T-Feed-R1-3 wires****Technical Specification**

Model	Barcode	Current	AC	Color		
T-FEED-L1-BK-3WIRE	9360338006022	10A	220-240V,50/60Hz	Black	100 PCS/CTN	410*260*240mm
T-FEED-L1-WH-3WIRE	9360338006046	10A	220-240V,50/60Hz	White	100 PCS/CTN	410*260*240mm
T-FEED-L2-BK-3WIRE	9360338006039	10A	220-240V,50/60Hz	Black	100 PCS/CTN	410*260*240mm
T-FEED-L2-WH-3WIRE	9360338011323	10A	220-240V,50/60Hz	White	100 PCS/CTN	410*260*240mm
T-FEED-R1-BK-3WIRE	9360338011330	10A	220-240V,50/60Hz	Black	100 PCS/CTN	410*260*240mm
T-FEED-R1-WH-3WIRE	9360338011347	10A	220-240V,50/60Hz	White	100 PCS/CTN	410*260*240mm

LED TRACK LIGHT SERIES

Three Wires Track System

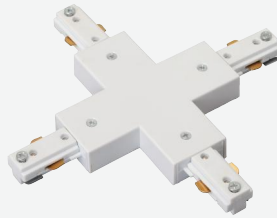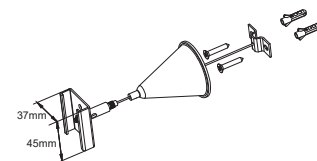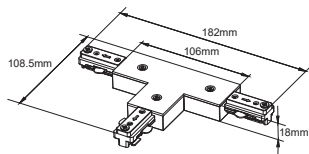**T-Feed-R2-3 wires****X-Feed-3 wires****Suspension Kit-3 wires****Technical Specification**


Model	Barcode	Current	AC	Color		
T-FEED-R2-BK-3WIRE	9360338011354	10A	220-240V,50/60Hz	Black	100 PCS/CTN	410*260*240mm
T-FEED-R2-WH-3WIRE	9360338006008	10A	220-240V,50/60Hz	White	100 PCS/CTN	410*260*240mm
X-FEED-BK-3WIRE	9360338006077	10A	220-240V,50/60Hz	Black	50 PCS/CTN	410*260*240mm
X-FEED-WH-3WIRE	9360338006084	10A	220-240V,50/60Hz	White	50 PCS/CTN	410*260*240mm
SUSPENSION KIT-3 WIRE	9360338006190	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm

LED TRACK LIGHT SERIES

Four-wire, three-circuit track system



Dimensions




White



Black




Technical Specification

Model	Barcode	Length	Current	Load Bearing	AC	Color		
TRACK-1M-BK-4WIRE	9360338006152	1M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	1025*202*102mm
TRACK-1M-WH-4WIRE	9360338011231	1M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	1025*202*102mm
TRACK-2M-BK-4WIRE	9360338006169	2M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	2025*202*102mm
TRACK-2M-WH-4WIRE	9360338011248	2M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	2025*202*102mm
TRACK-3M-BK-4WIRE	9360338006176	3M	10A	10KG/M	220-240V,50/60Hz	Black	20 PCS/CTN	3025*202*102mm
TRACK-3M-WH-4WIRE	9360338011255	3M	10A	10KG/M	220-240V,50/60Hz	White	20 PCS/CTN	3025*202*102mm




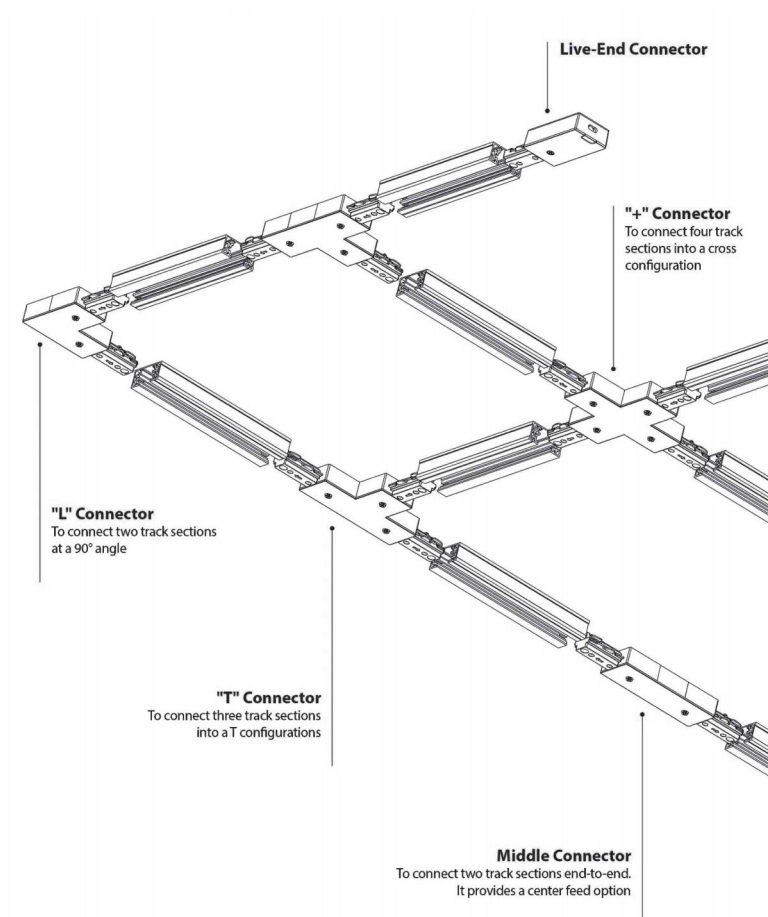


LED TRACK LIGHT SERIES

Four-wire, three-circuit track system

**Power Connector&End Cup-4 wires****Straightt Connector-4 wires****Suspension Clamp-4 wires****Technical Specification**







Model	Barcode	Current	AC	Color		
POWER CONNECTOR & END CAP-4WIRE	9360338011361	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	340*210*180mm
STRAIGHT CONNECTOR-4WIRE	9360338011378	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	380*210*220mm
SUSPENSION CLAMP-4WIRE	9360338011385	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	380*210*220mm

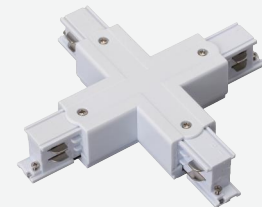**Mini Joiner-4 wires****Mini Straightt Connector-4 wires****“+” Connector -4 wires****Technical Specification**







Model	Barcode	Current	AC	Color		
MINI JOINER-4WIRE	9360338011392	10A	220-240V,50/60Hz	White/Black	200 PCS/CTN	350*215*195mm
MINI STRAIGHT CONNECTOR-4WIRE	9360338011408	10A	220-240V,50/60Hz	White/Black	200 PCS/CTN	350*215*195mm
+ -CONNECTOR-4WIRE	9360338011415	10A	220-240V,50/60Hz	White/Black	30 PCS/CTN	410*260*240mm

LED TRACK LIGHT SERIES

Four-wire, three-circuit track system

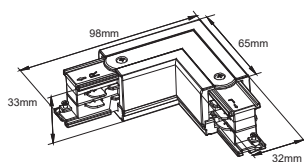**“L” Right Container-4 wires****“L” Left Container-4 wires****T Connector-L1-4 wires****Technical Specification**


Model	Barcode	Current	AC	Color		
L-RIGHT CONNECTOR-4WIRE	9360338011422	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	380*210*220mm
L-LEFT CONNECTOR-4WIRE	9360338011439	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	380*210*220mm
T CONNECTOR-L1-4WIRE	9360338011446	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm

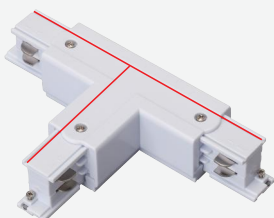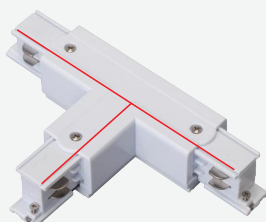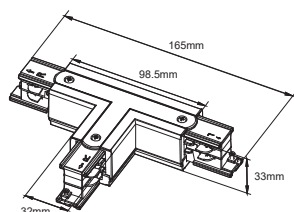**T Connector-L2-4 wires****T Connector-R1-4 wires****T Connector-R2-4 wires****Technical Specification**

Model	Barcode	Current	AC	Color		
T CONNECTOR-L2-4WIRE	9360338011453	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm
T CONNECTOR-R1-4WIRE	9360338011460	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm
T CONNECTOR-R2-4WIRE	9360338011477	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm

LED TRACK LIGHT SERIES


Four-wire, three-circuit track system

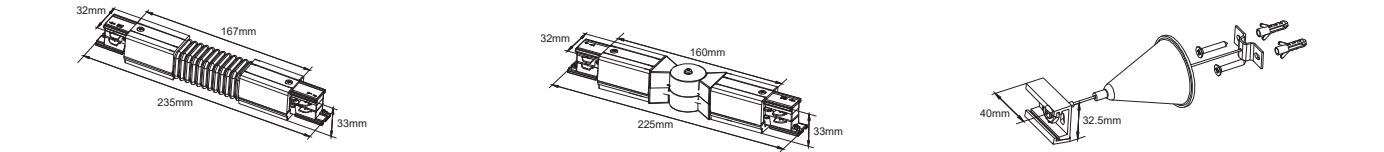

Technical Specification


Model	Barcode	Current	AC	Color		
FLEXIBLE CONNECTOR-4WIRE	9360338011484	10A	220-240V,50/60Hz	White/Black	50 PCS/CTN	410*260*240mm
FLEXIBLE HARD CONNECTOR-4WIRE	9360338011491	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	420*272*255mm
SUSPENSION KIT-4WIRE	9360338011507	10A	220-240V,50/60Hz	White/Black	100 PCS/CTN	410*260*240mm



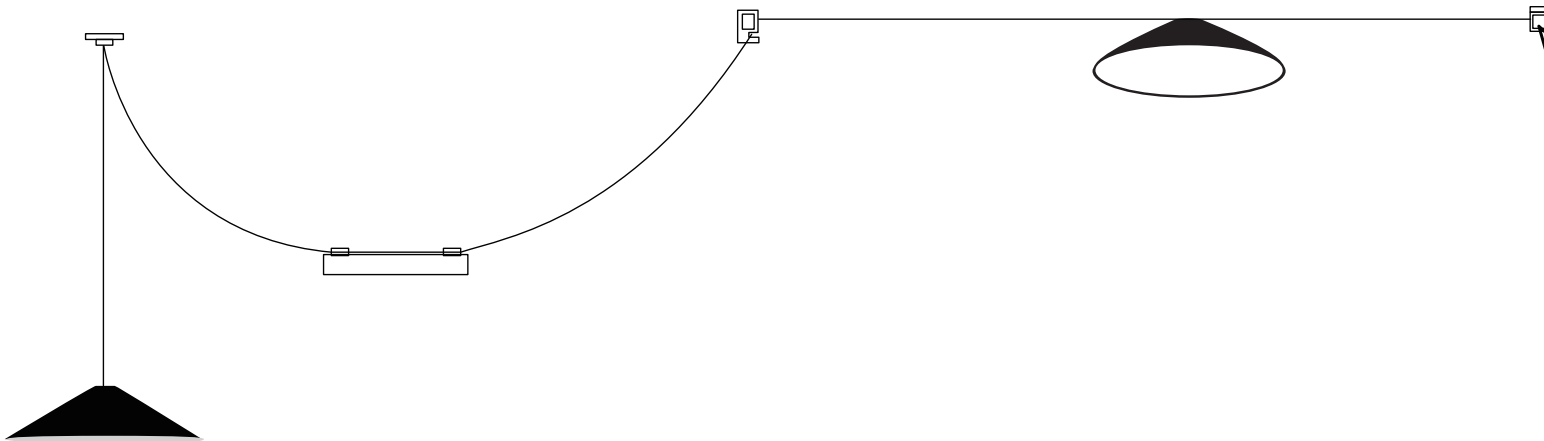


WOVEN TRACK


24V ultra-thin woven track light, can be freely matched by each accessory to achieve the ideal lighting environment, compatible with 2.4G, TUYA, Zigbee, intelligent system.




Woven track





Surface mounted track

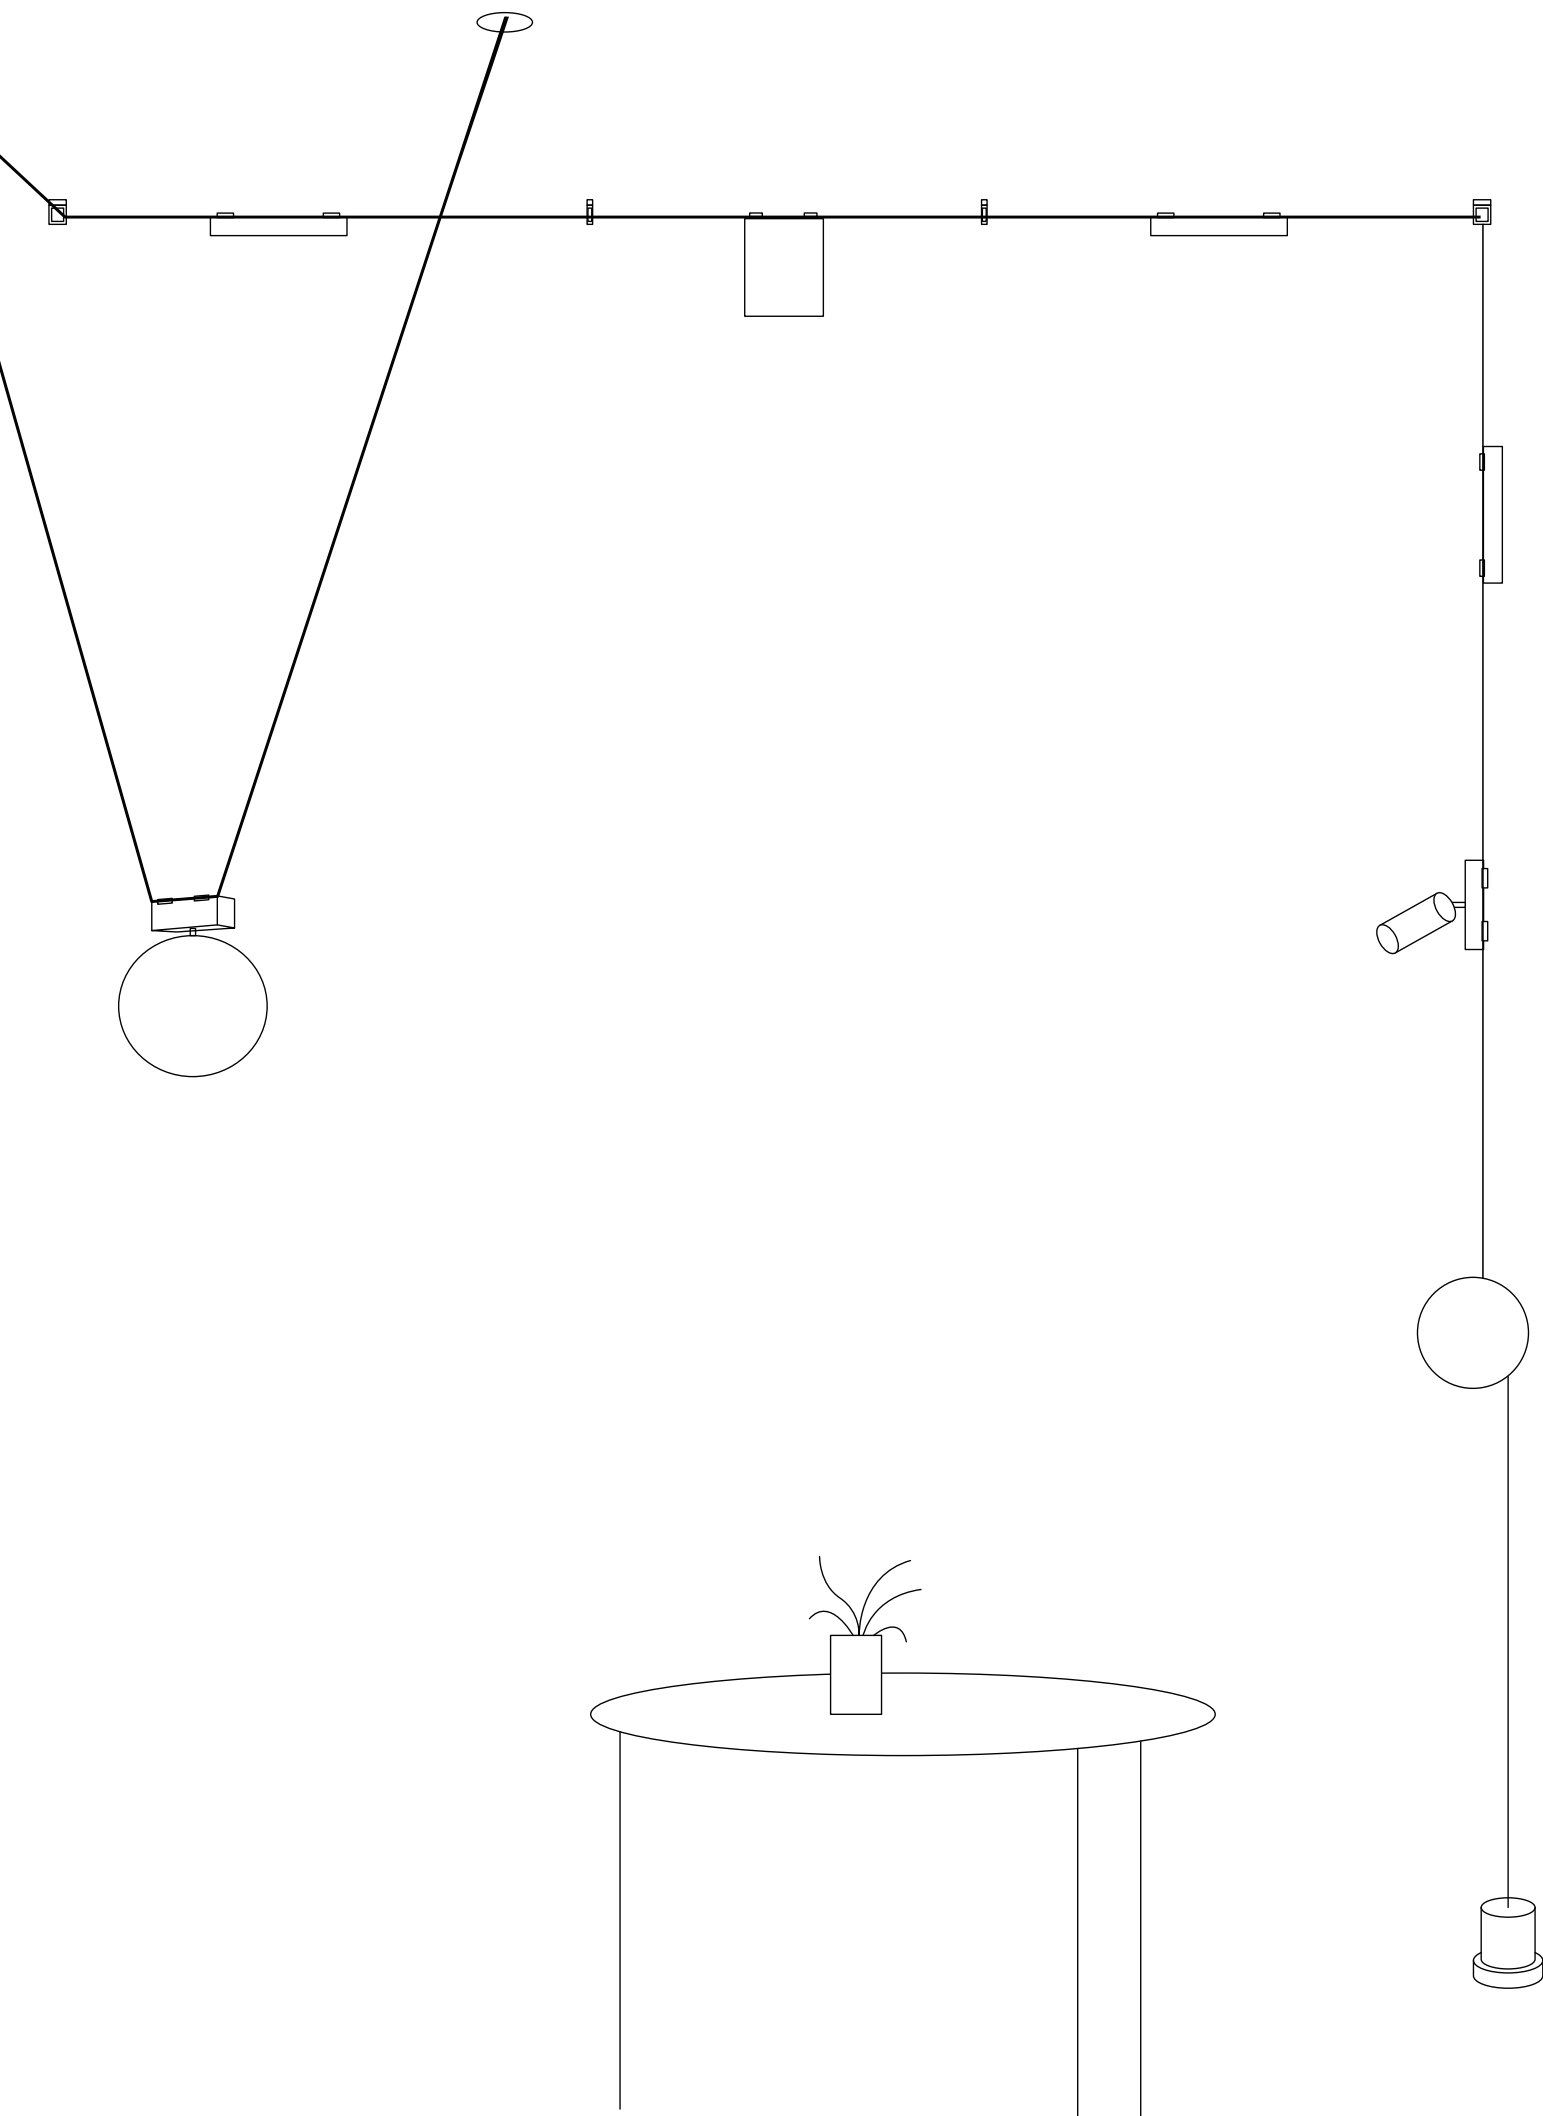


LED MAGNETIC TRACK SYSTEM SERIES

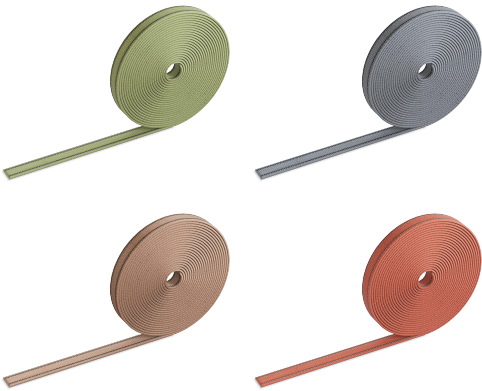


Dimensions

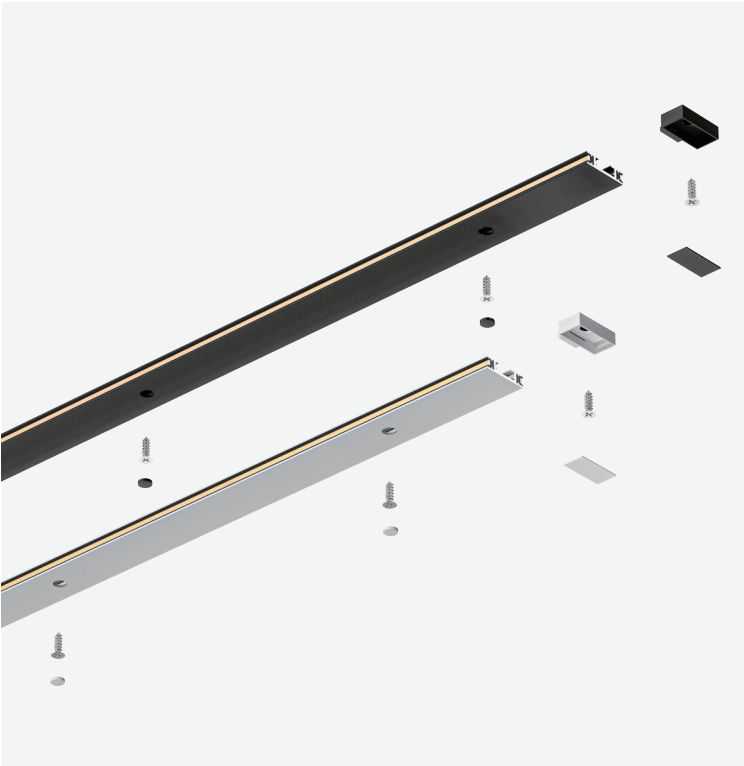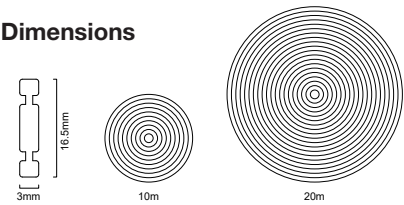

Watt: 100V/200W
Voltage: DC 24V
Color: Black/ White
Material: Aluminum+ Copper

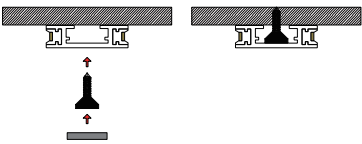

Dimensions

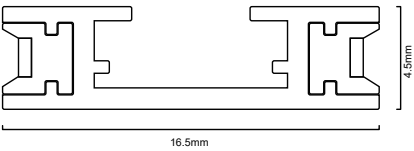

1000x16.5x4.5mm
2000x16.5x4.5mm



Accessories using woven tracks Connection options

Choose your preferred installation option according to your needs.



3A-24V-PDYT


Large fixed nodes

Size: Ø50*160mm

Feature

- Track conductive conversion function
- Braided track steering installation
- Suitable for ceiling, wall and ground installation

Dimensions



3A-24V-PDSR


Braid track input module

Size: 31x22x22mm

Feature

- Braided track power supply module

Dimensions

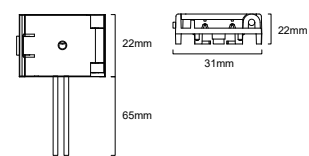

3A-24V-PDDK


Braid track input module

Size: 31x22x22mm

Feature

- Lamp is connected to a Woven track

Dimensions



3A-24V-PDGK


Small fixed nodes

Size: 31x11x40mm

Feature

- Woven track holding adjuster bracket

Dimensions

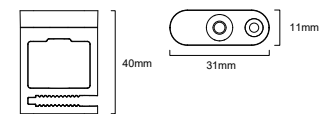

Power Module



**TPS16-BK100W24V
2.4G/TUYA**

222x25x29mm

330x25x29mm



3A-24VS-LE

54x25x49mm


Function: When an external transformer is used, an input module is used to energize the track

Connectors



Straight Connect Module

3A-24VS-I
36.5x16.5x4.5mm




L Connect Module

3A-24VS-L
26.5x26.5x4.5mm




In&Out Connect Module

3A-24VS-IN
21.5x21.5x4.5mm



T Connect Module

3A-24VS-T
36.5x26.5x4.5mm

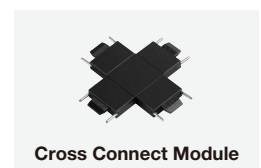

Cross Connect Module

3A-24VS-X
36.5x36.5x4.5mm

3 CCT:White Light/ Natural Light/Yellow Light


Note: The power supply is equipped with conventional integrated power supply.

3000K	WW
4000K	NW
6000K	CW

Smartcontrol dimming andcoloradjustment:2.4G/TUYA/ZigBee/MiJia
(Power supply centralized control).



LED MAGNETIC TRACK SYSTEM SERIES

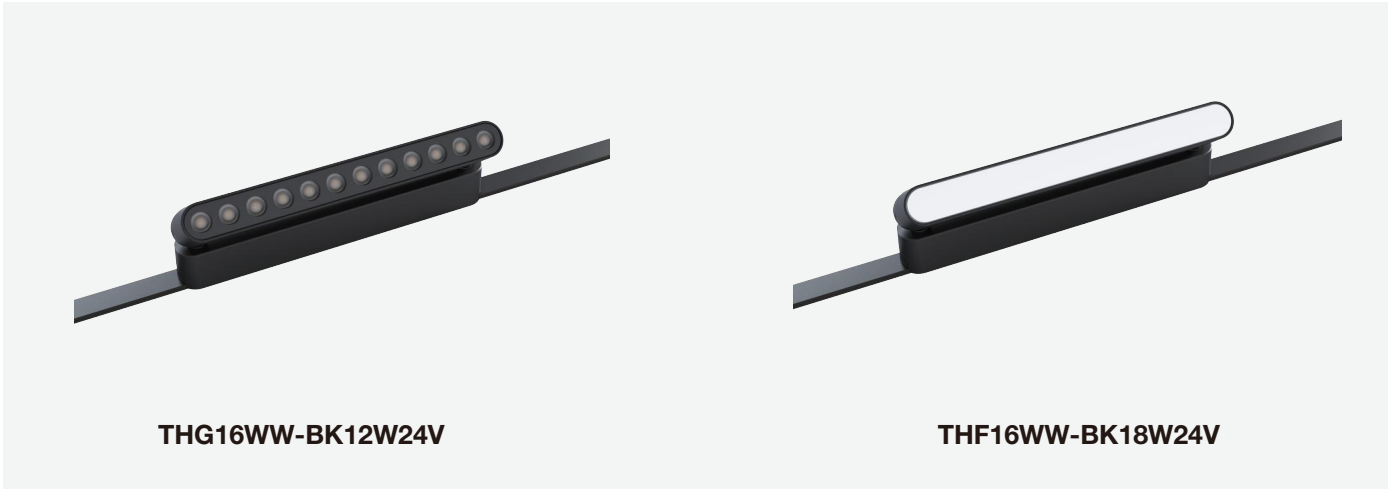


Black

Product Features

- Low voltage,high safety at 24V
- Woven track,Surface mounted track
- A safer safety lock design is used
- Thins magnetic line track
- For indoor applications in offices, homes, hotels,etc


Dimensions

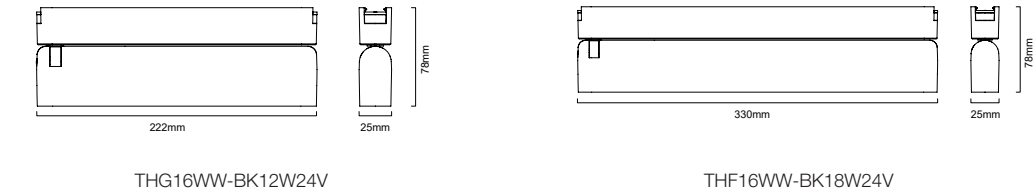

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
THG16WW-BK12W24V	9360338010067	12W	534lm	222*25*78mm	BK	Aluminum+PC	24°	3000K&4000K&6000K	30 PCS/CTN	L470*W160*H265mm
THF16WW-BK18W24V	9360338010074	18W	686lm	330*25*29mm	BK	Aluminum+PC	24°	3000K&4000K&6000K	50 PCS/CTN	L685*W160*H190mm

LED MAGNETIC TRACK SYSTEM SERIES

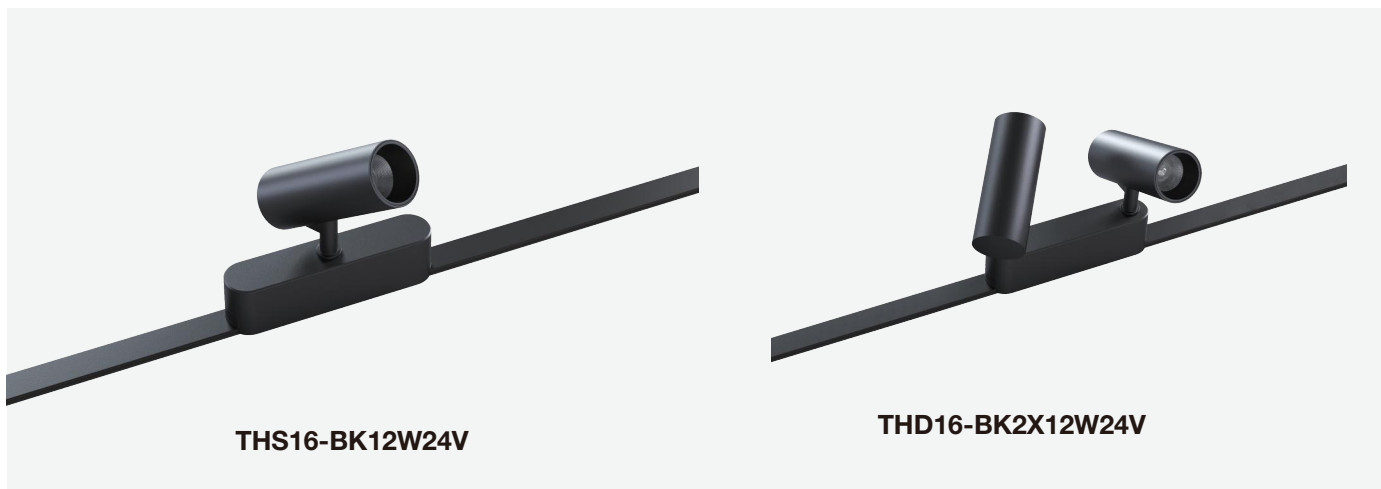


Black




Product Features

- Low voltage,high safety at 24V
- Woven track,Surface mounted track
- A safer safety lock design is used
- Thins magnetic line track
- For indoor applications in offices, homes, hotels,etc

Dimensions



THS16-BK12W24V




THD16-BK2X12W24V

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
THS16-BK12W24V	9360338010050	12W	556lm	Ø43*110mm	BK	Aluminum+PC	24°	3000K&4000K&6000K	30 PCS/CTN	L350*W285*H350mm
THD16-BK2X12W24V	9360338010043	24W	1424lm	Ø43*110mm	BK	Aluminum+PC	24°	3000K&4000K&6000K	20 PCS/CTN	L420*W335*H305mm


LED MAGNETIC TRACK SYSTEM SERIES

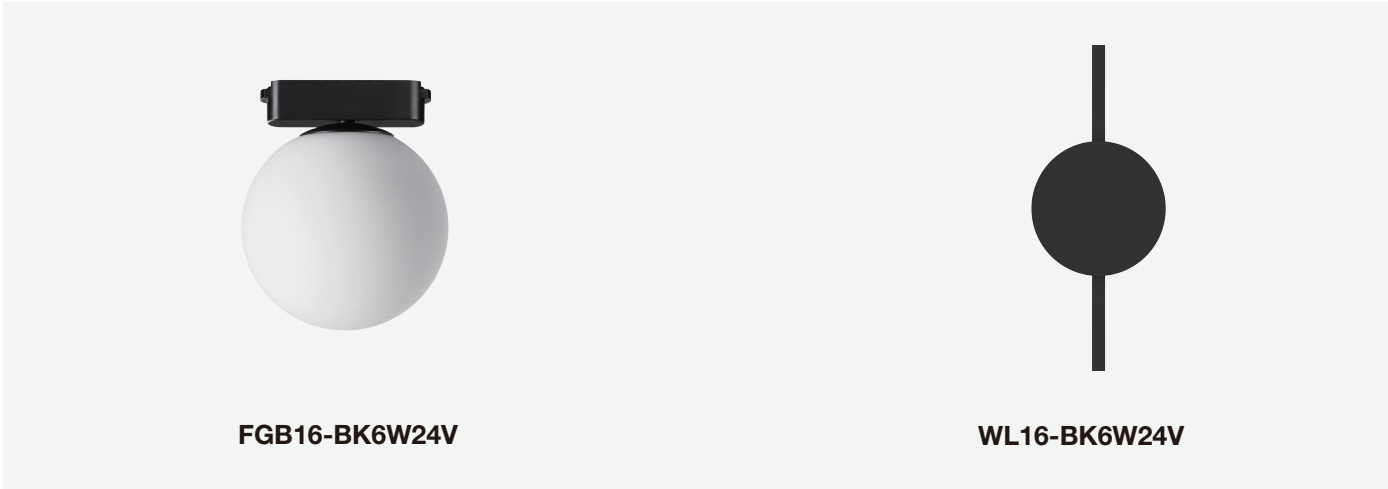

Product Features

- Low voltage,high safety at 24V
- Woven track,Surface mounted track
- A safer safety lock design is used
- Thins magnetic line track
- For indoor applications in offices, homes, hotels,etc

Dimensions

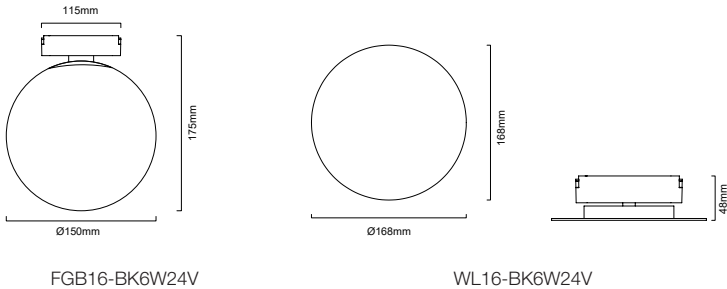


Technical Specification


Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
FGB16-BK6W24V	9360338010098	6W	585lm	Ø150*175mm	BK	Aluminum+PC	110°	3000K&4000K&6000K	8 PCS/CTN	L445*W405*H415mm
WL16-BK6W24V	9360338010036	6W	28lm	Ø168*48mm	BK	Aluminum+PC	120°	3000K&4000K&6000K	30 PCS/CTN	L530*W300*H360mm





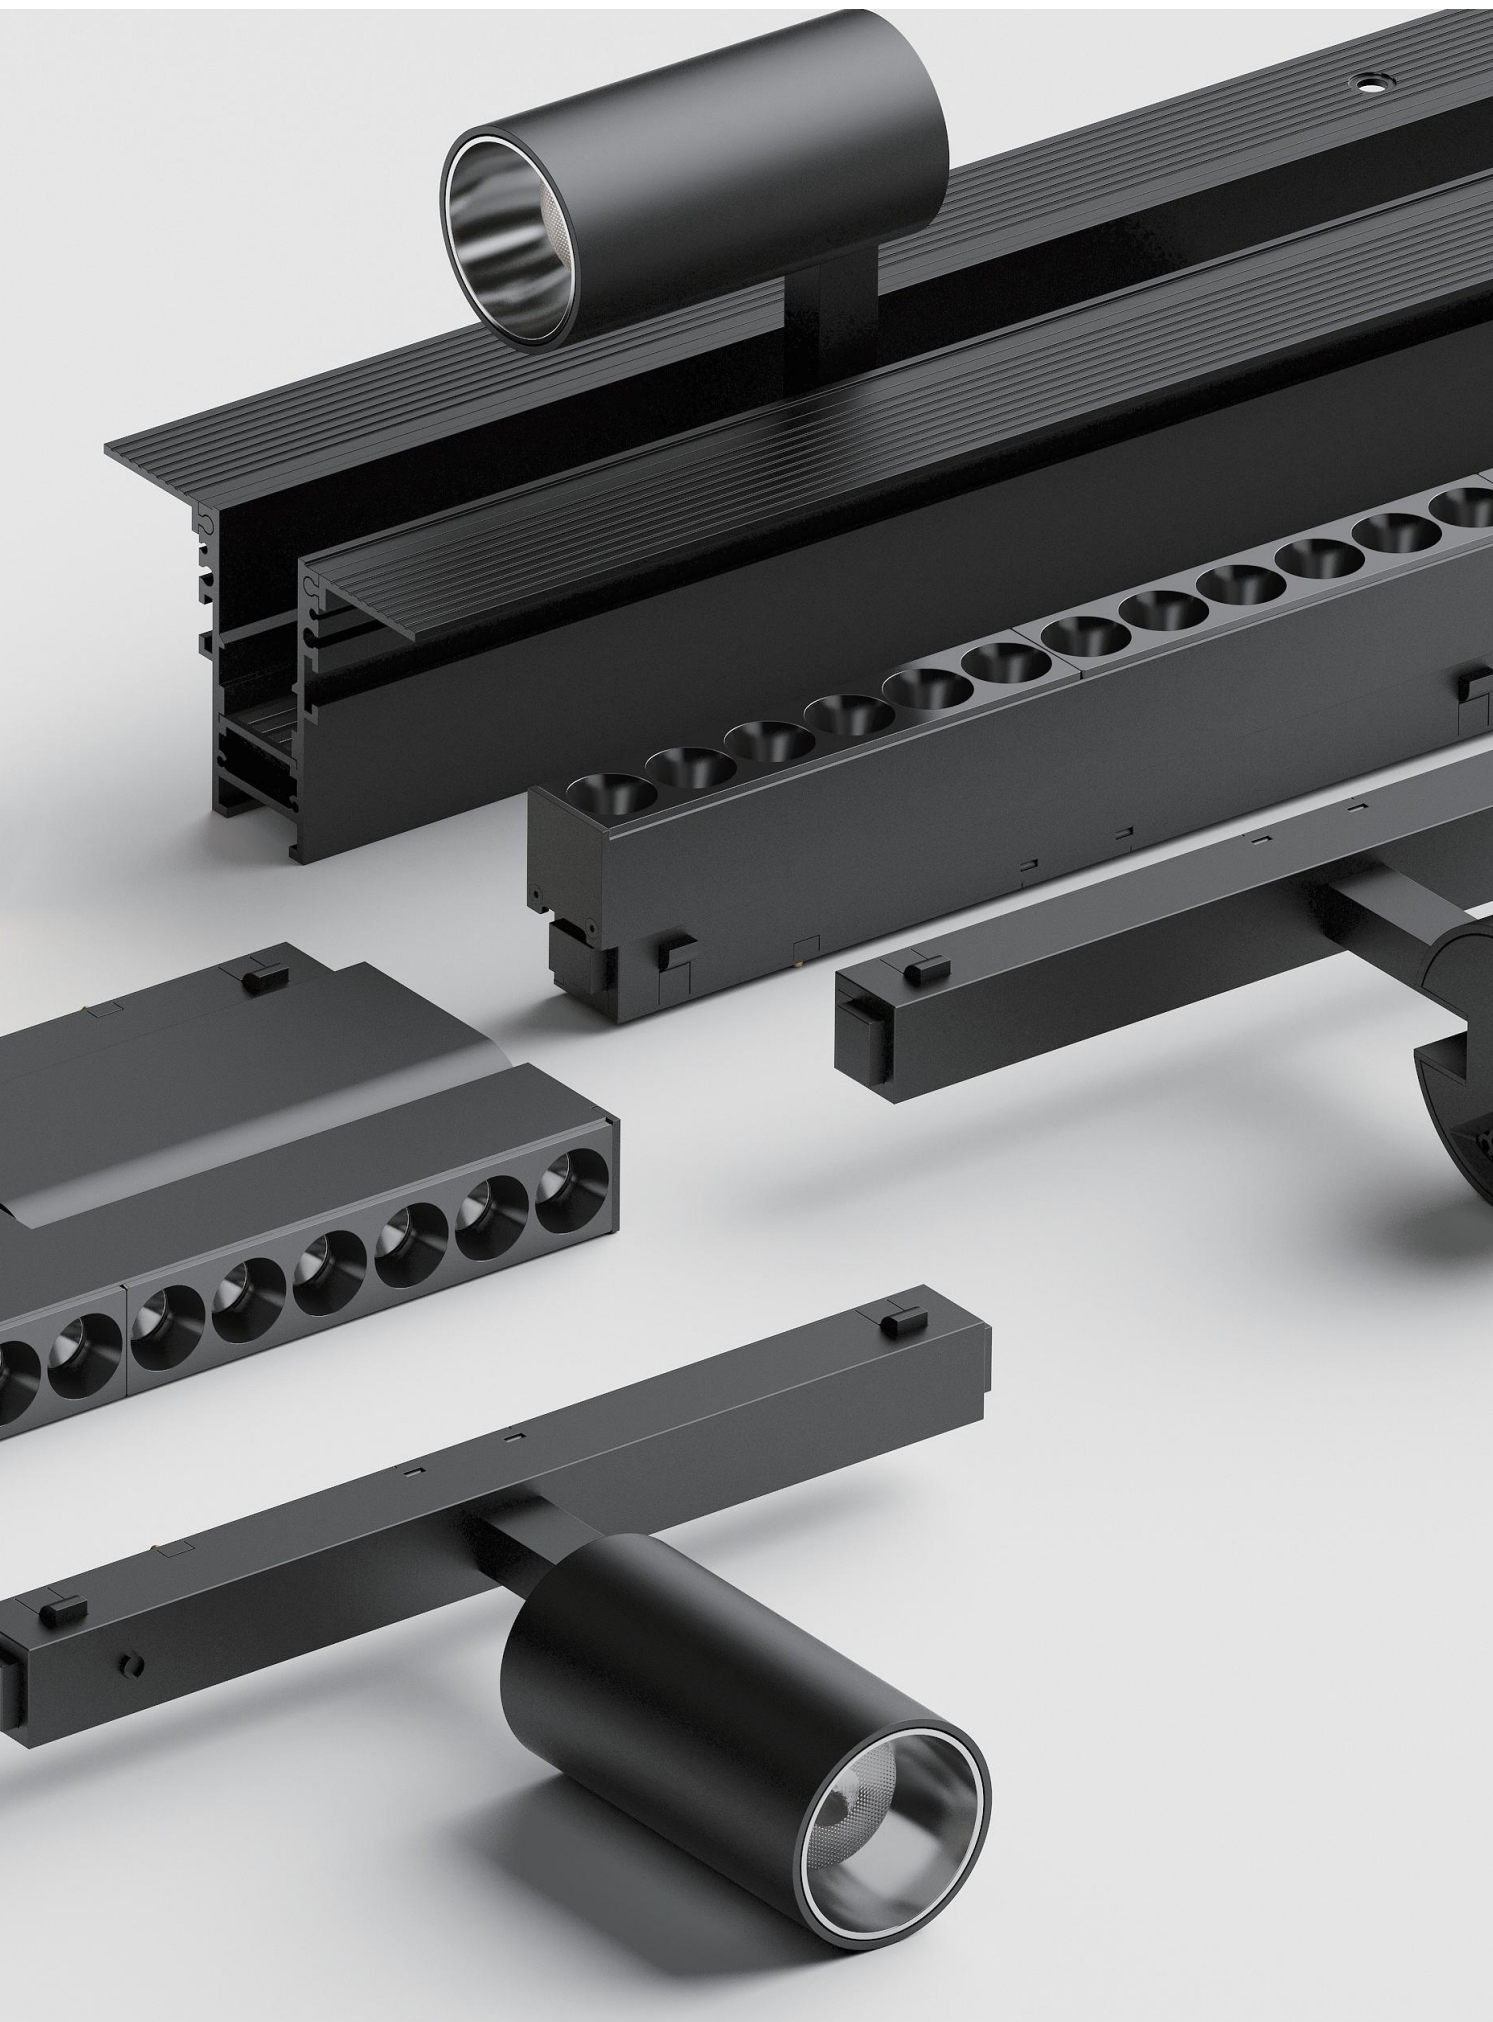

LED MAGNETIC TRACK LIGHT SERIES

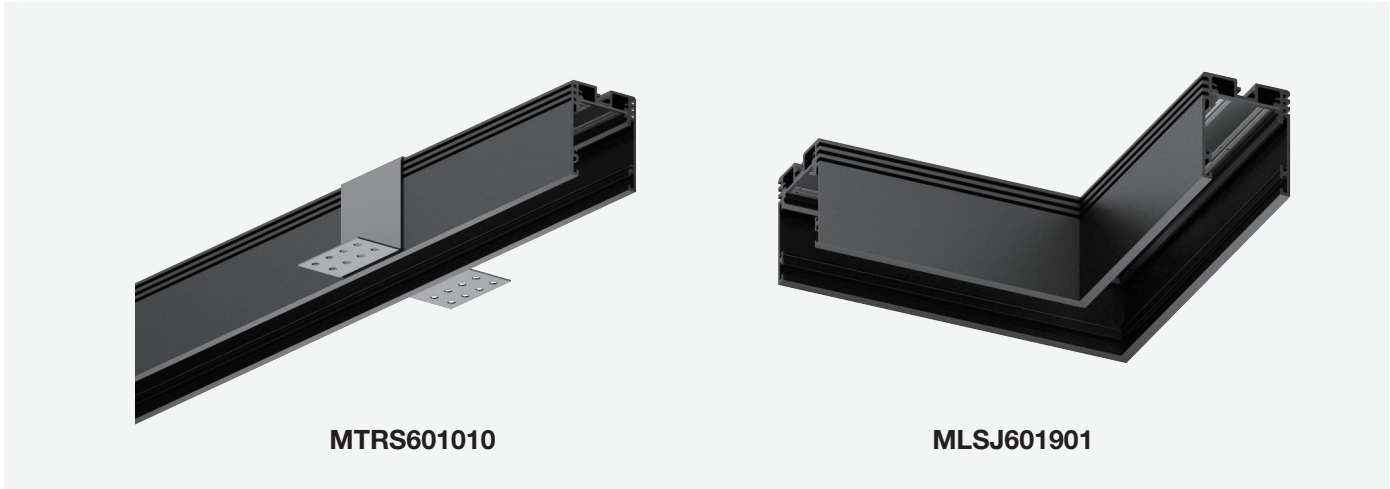


Black

Product Features

- 3 phase 4 wire surface mount track bar, 1 meter, Completed white color (601010)
- MAGNETIC TRACK L SHAPE JOINER BK (601901)

Technical Specification


Model	Barcode	Size	Color	Type	Length
MTRS601010-BK1M3P	9360338006206	1000 *51*63mm	BK	Recessed	1meter
MTRS601010-BK2M3P	9360338006213	2000*51*63mm	BK	Recessed	2meters
MLSJ601901-BK	9360338006220	200*200mm	BK	Recessed	90° corner

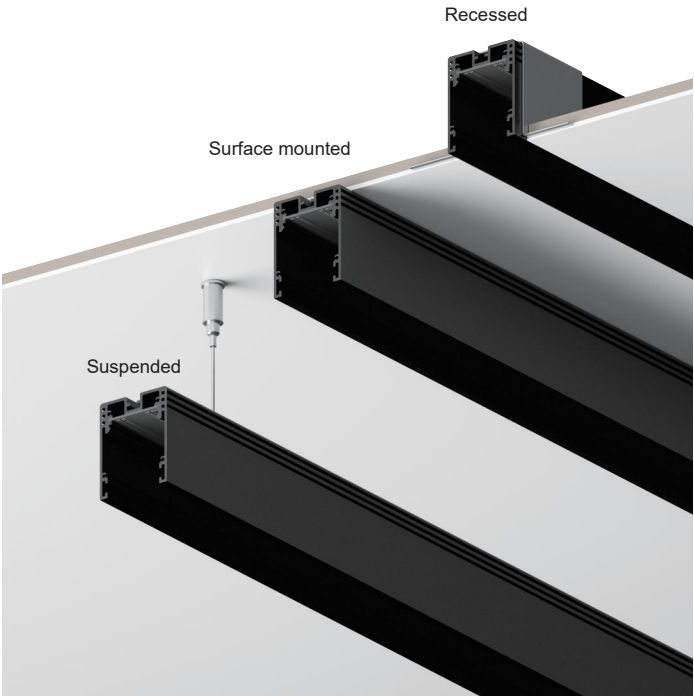

LED MAGNETIC TRACK LIGHT SERIES




Black



Product Features

- Modern design, magnetic track light
- Die-cast Aluminum body
- Compatible with leading and trailing edge phase cut dimmers
- Easy installation
- 3 Years replacement warranty

Dimensions




MTH6012011



MTHP601241

Applications


Residential , commercial , shops , restaruants etc

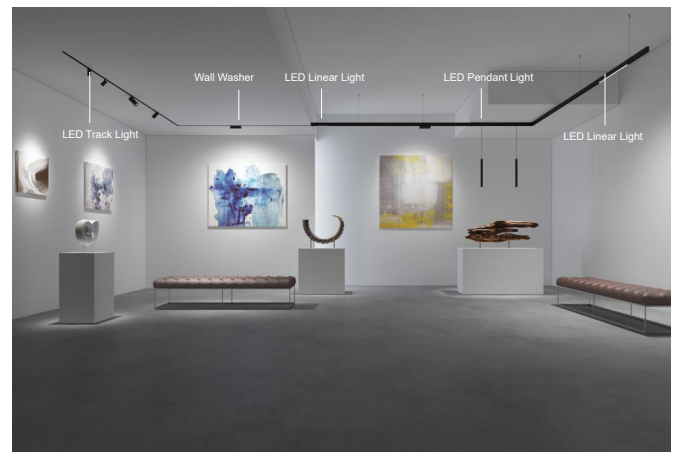

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
MTH6012011-BK3K10C02	9360338006541	10W	750lm	Ø50*100*214.5mm	BK	Aluminium	36°	3000K	30 PCS/CTN	425*315*385mm
MTH6012011-BK4K10C02	9360338006558	10W	750lm	Ø50*100*214.5mm	BK	Aluminium	36°	4000K	30 PCS/CTN	425*315*385mm
MTHP601241-BK3K10C02	9360338006589	10W	750lm	Ø55*100*375mm	BK	Aluminium	20°-50°	3000K	16 PCS/CTN	770*305*310mm
MTHP601241-BK4K10C02	9360338006596	10W	750lm	Ø55*100*375mm	BK	Aluminium	20°-50°	4000K	16 PCS/CTN	770*305*310mm

LED MAGNETIC TRACK LIGHT SERIES

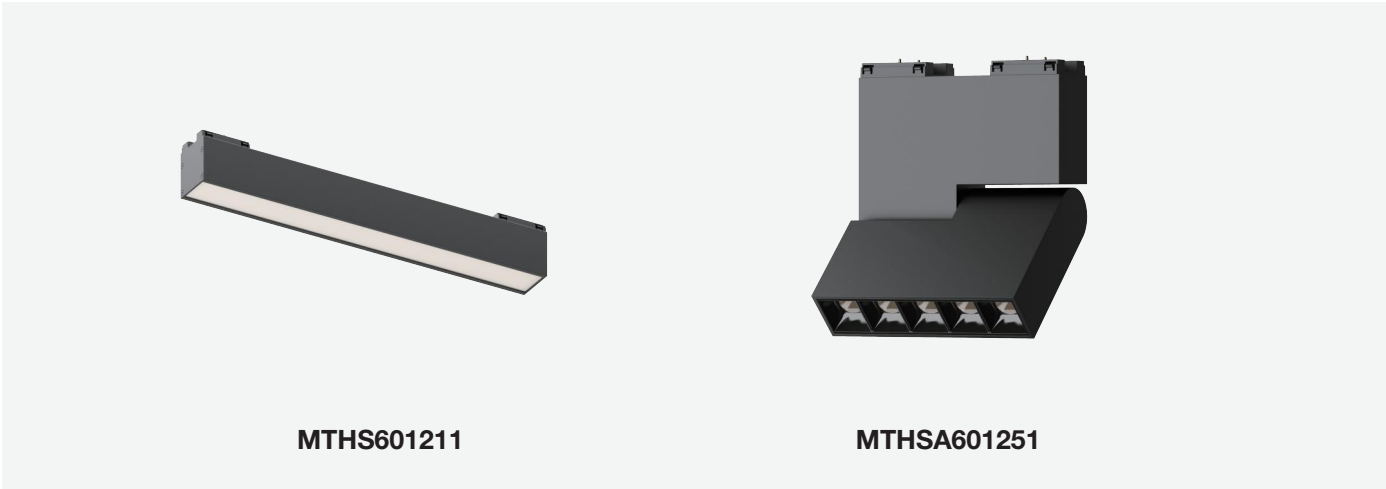



Black






Product Features

- Modern design, magnetic track light
- Die-cast Aluminum body
- Compatible with leading and trailing edge phase cut dimmers
- Easy installation
- 3 Years replacement warranty

Applications

Residential , commercial , shops , restaruants etc

Dimensions

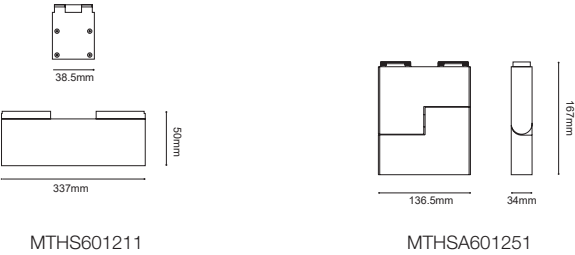

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
MTHS601211-BK3K12S	9360338006565	12W	833.58lm	337*38.5*50mm	BK	Aluminium	120°	3000K	16 PCS/CTN	440*305*310mm
MTHS601211-BK4K12S	9360338006572	12W	833.58lm	337*38.5*50mm	BK	Aluminium	120°	4000K	16 PCS/CTN	440*305*310mm
MTHSA601251-BK3K10	9360338006602	10W	344.7lm	136.5*34*167mm	BK	Aluminium	45°	3000K	20 PCS/CTN	415*305*260mm
MTHSA601251-BK4K10	9360338006619	10W	344.7lm	136.5*34*167mm	BK	Aluminium	45°	4000K	20 PCS/CTN	415*305*260mm




5575 Series

Light distribution



Multi-angle connector

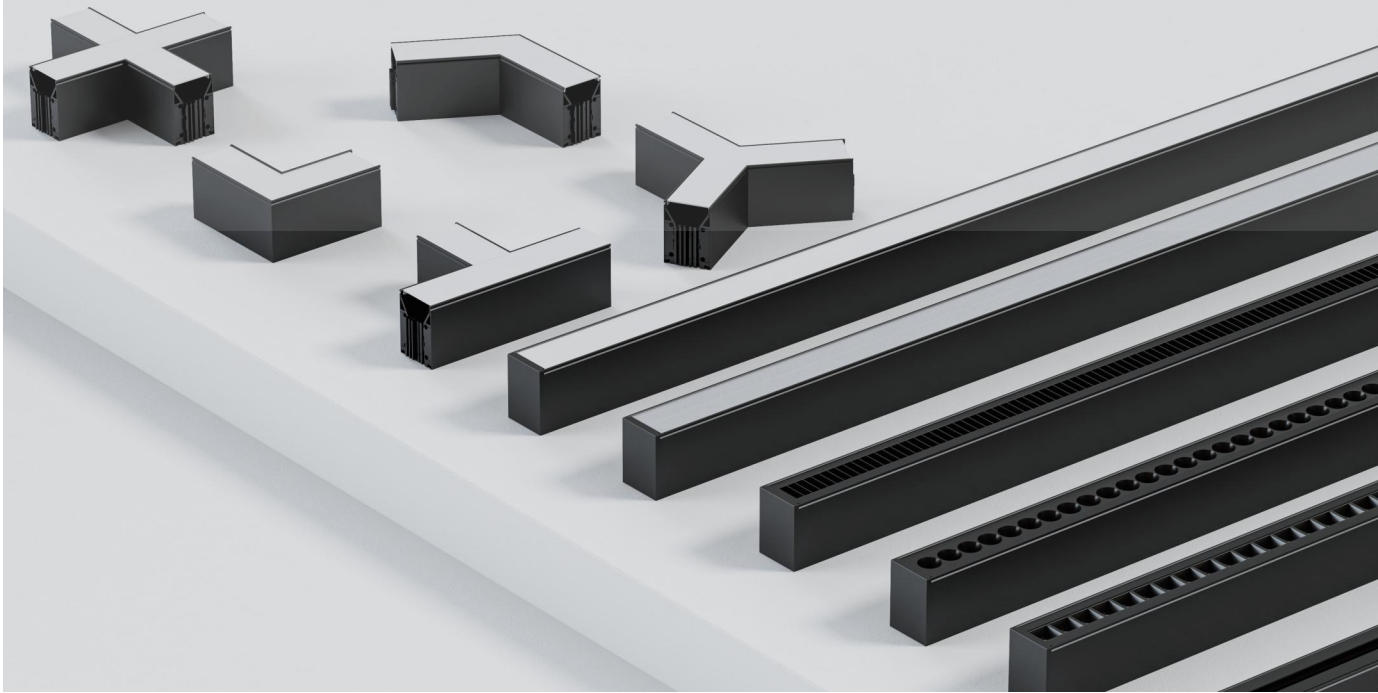

MULTI-INSTALLATION

Up and down lighting design with suspension way

Optional installation accessories

Wider applicability



ACCESSORIES



Pendant





Surface mounted



Recessed




Recessed

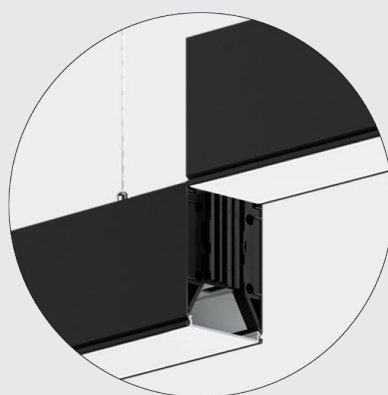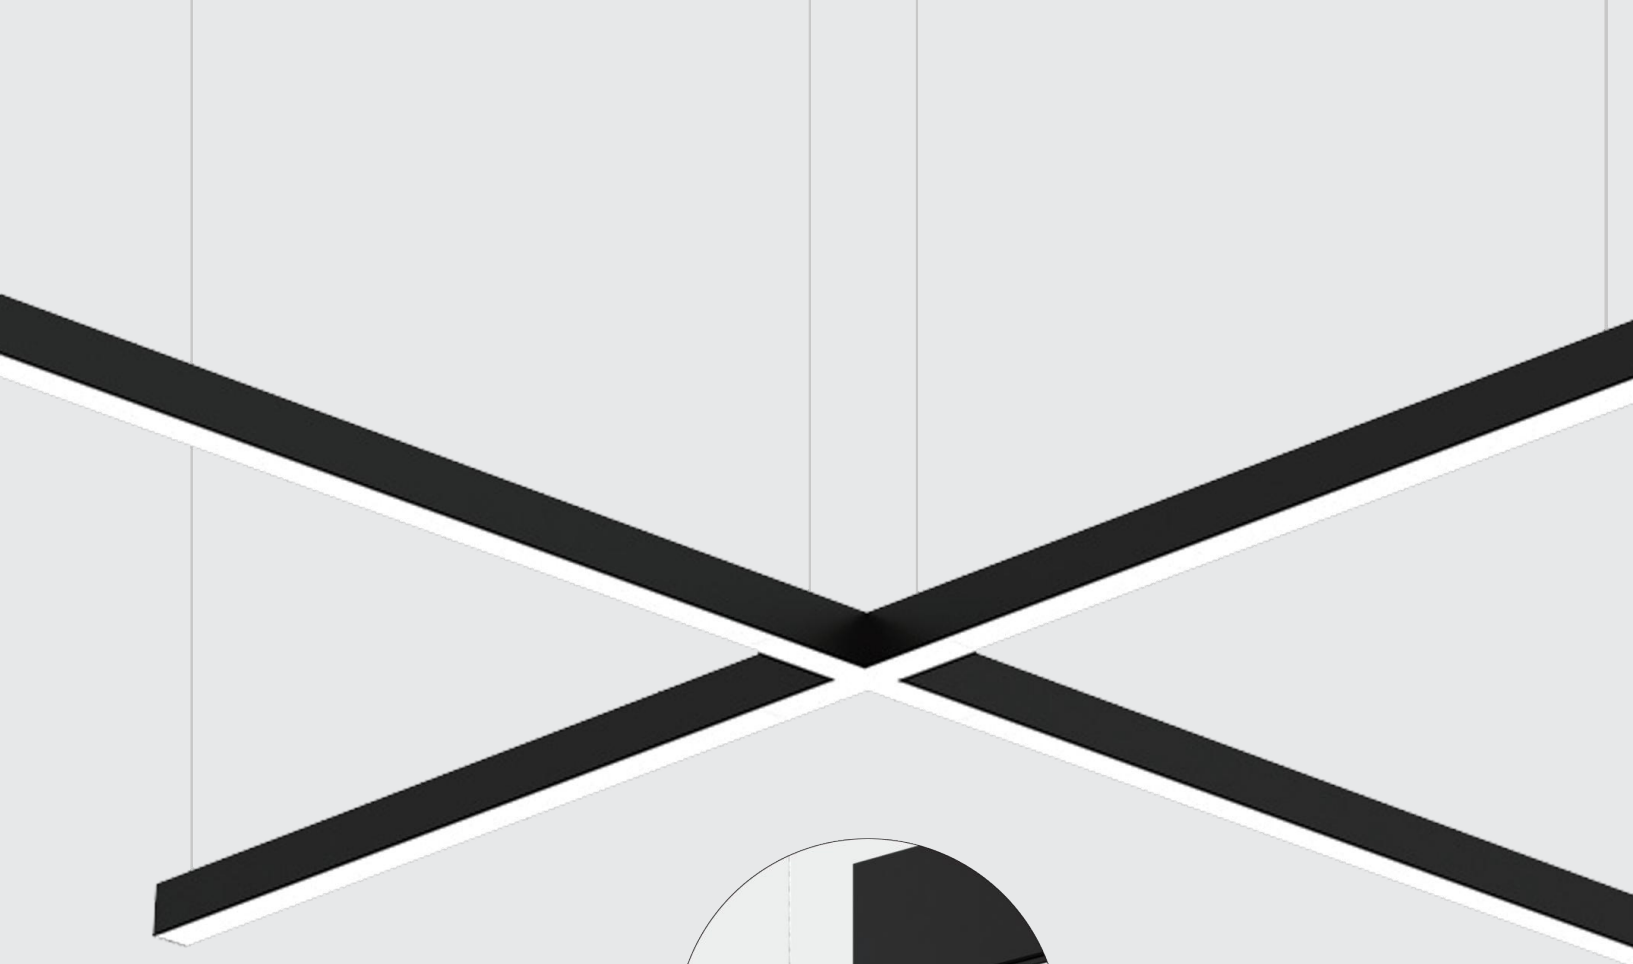

30S Quick splicing


LED LINEAR LIGHT SERIES

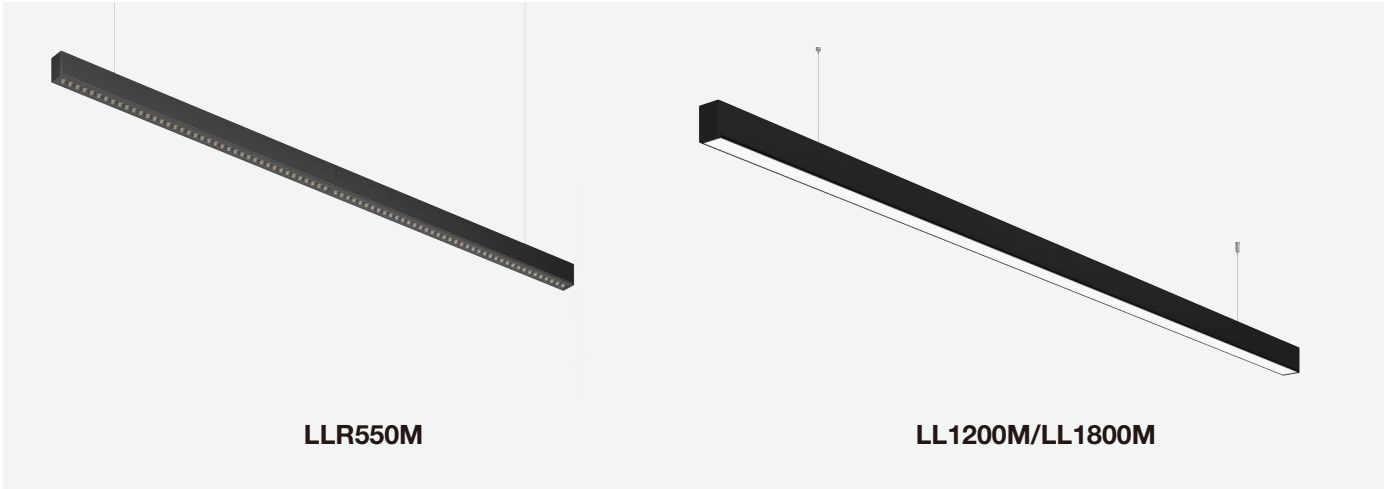

Product Features

- 110lm/w for options
- Housing: extruded aluminum material
- Wide application for: school, super market, office and warehouse
- Available with suspending installation and surface-mounted installation
- 2ft/4ft/5ft and 8ft dimensions for variety choices
- 3 year warranty

Dimensions

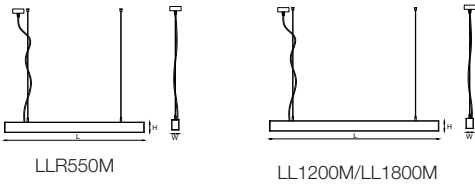

Technical Specification


Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
LLR550M-BKTC18S	9360338009771	18W	1620lm	550*55*75mm	BK	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	680*135*195mm
LLR550M-WHTC18S	9360338009788	18W	1620lm	550*55*75mm	WH	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	680*135*195mm
LL1200M-BKTC40S	9360338002314	40W	3600lm	1200*55*75mm	BK	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	1280*135*195mm
LL1200M-WHTC40S	9360338002307	40W	3600lm	1200*55*75mm	WH	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	1280*135*195mm
LL1800M-BKTC50S	9360338009757	50W	4500lm	1800*55*75mm	BK	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	1880*135*195mm
LL1800M-WHTC50S	9360338009764	50W	4500lm	1800*55*75mm	WH	Aluminum	100°	3000K&4000K&5700K	4 PCS/CTN	1880*135*195mm



PRIMA Series



LED PANEL SERIES

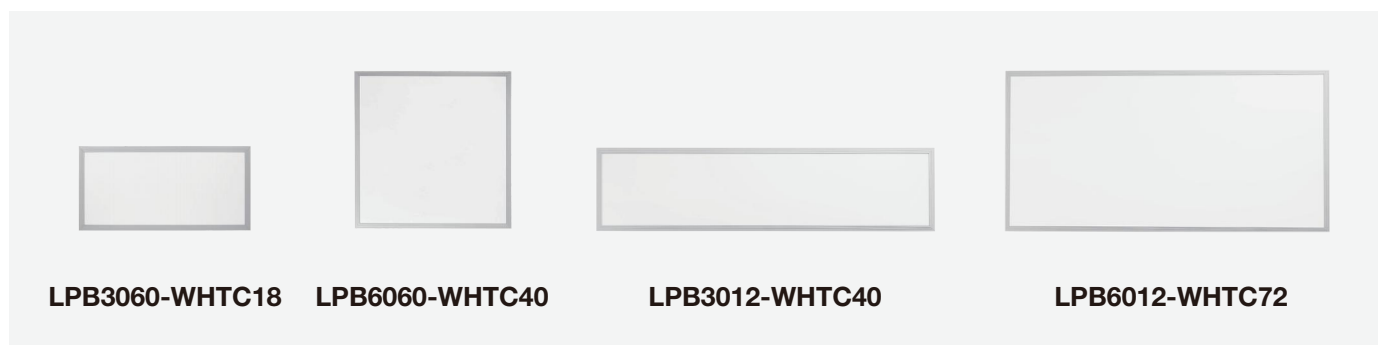

White




Product Features

- Backlit lighting
- UGR<19, flicker free driver
- Dali2 optional, dlmable optional
- <19 single box
- Alltricolour 3000k, 4000k, 6000k


Dimensions




LPB3060-WHTC18



LPB6060-WHTC40



LPB3012-WHTC40



LPB6012-WHTC72

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
LPB3060-WHTC18	9360338002611	18W	2160lm	600*300*H34mm	580*280mm	WH	AL+Iron+PC	120°	3000K&4000K&5700K	6 PCS/CTN	655*230*355mm
LPB6060-WHTC40	9360338002628	40W	4500lm	600*600*H34mm	580*280mm	WH	AL+Iron+PC	120°	3000K&4000K&5700K	6 PCS/CTN	655*230*655mm
LPB3012-WHTC40	9360338002659	40W	4500lm	1200*300*H34mm	580*280mm	WH	AL+Iron+PC	120°	3000K&4000K&5700K	6 PCS/CTN	1275*265*330mm
LPB6012-WHTC72	9360338007272	72W	8640lm	600*1200*H34mm	580*1180mm	WH	AL+Iron+PC	120°	3000K&4000K&5700K	6 PCS/CTN	1275*180*630mm

LED PANEL SERIES




Product Features

- Backlit lighting
- UGR<19, flicker free driver
- Diffuser PS, PC, PMMA

Application

- Commercial; office and shops etc


Dimensions



Technical Specification

Model	W	Im	Size	Cutout	Color	Material	Beam	CCT	PCS/CTN	Box Size
LPB NEW 36W-6000K	36W	4320lm	1200*300*34mm	580*280mm	WH	AL+Iron+PC	100°	6000K	6 PCS/CTN	1275*265*330mm

LED PANEL RECESS FRAME

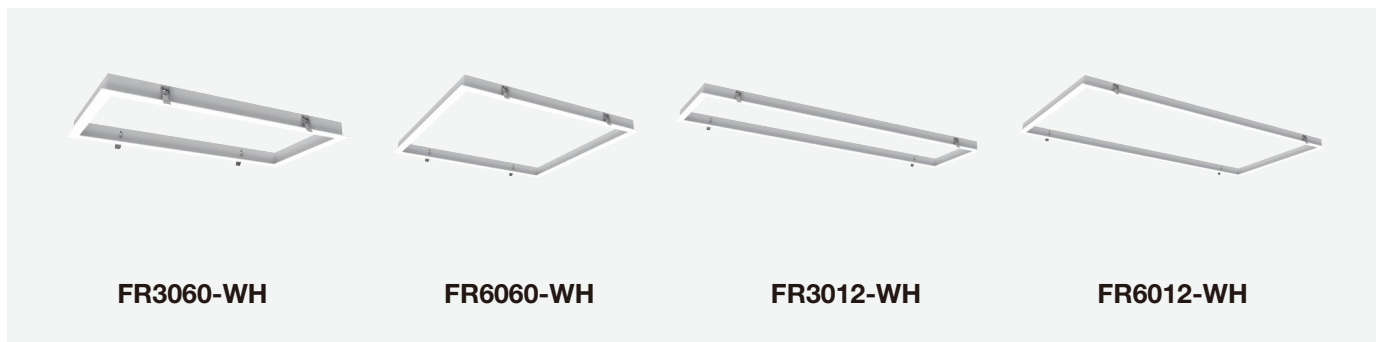


White

Product Features

- Pressed steel base designed for specifically to allow LED Panel Light to be installed into plaster ceilings
- Recessed plaster frames in powder coated white

Dimensions

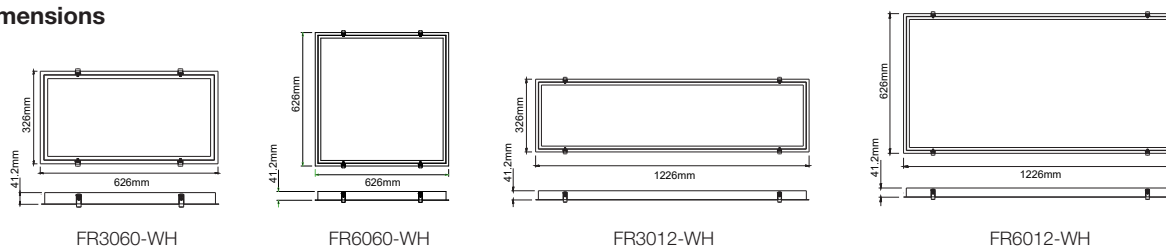

Technical Specification

Model	Barcode	Size	Panel	Cutout	Color		
FR3060-WH	9360338002666	626*326*41mm	600*300mm	614*314mm	WH	10 PCS/CTN	670*475*380mm
FR6060-WH	9360338002680	626*626*41mm	600*600mm	614*614mm	WH	10 PCS/CTN	670*475*680mm
FR3012-WH	9360338002697	1226*326*41mm	1200*300mm	1214*314mm	WH	10 PCS/CTN	1270*475*380mm
FR6012-WH	/	1226*626*34mm	1200*600mm	1214*614mm	WH	10 PCS/CTN	1270*475*680mm

1.Assembling the frame.Just fixing and adjust the spring clips with screws as per the steps as below from photo 1 to photo 2.



2.Installing the frames.Putting one side of the frames into ceiling hole and fixing it with spring clips,following the way to fix another side,ensuring the frames fixing wall and safe,ensuring the frames fixing wall and safe,putting the panel lighe fixture inside and place it on the recessed frames.



LED PANEL SURFACE MOUNT FRAME



FS3060-WH



FS6060-WH



FS3012-WH



FS6012-WH




White


Product Features

- Pressed steel base designed for specifically to allow LED Panel Light to be installed into plaster ceilings
- In powder coated white


Dimensions




FS3060-WH



FS6060-WH

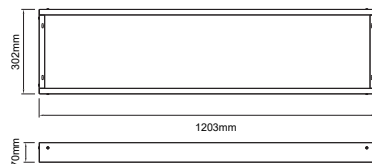


FS3012-WH

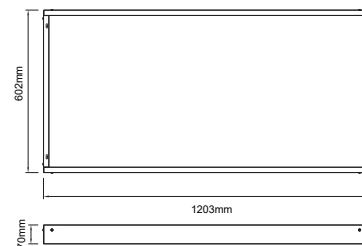

FS6012-WH

Technical Specification


Model	Barcode	Size	Panel	Color		
FS3060-WH	9360338002710	603*302*71mm	603*300mm	WH	6 PCS/CTN	650*475*345mm
FS6060-WH	9360338002727	602*603*71mm	600*300mm	WH	6 PCS/CTN	650*475*645mm
FS3012-WH	9360338002697	1203*302*71mm	1200*300mm	WH	6 PCS/CTN	1250*475*345mm
FS6012-WH	9360338002703	1203*602*41mm	1200*600mm	WH	6 PCS/CTN	1250*475*645mm



PANEL

SUSPENSION TYPE

SUSPENDED PANEL

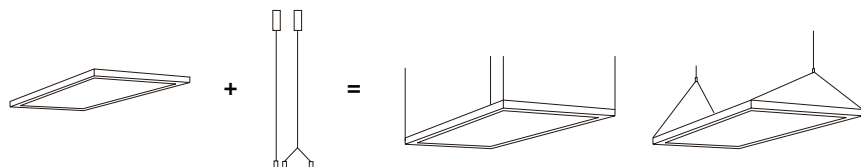



LED CEILING LIGHT SERIES



AC1011-WHTC15S11




AC1011-WHTC18S11



AC1011-WHTC30S11




White




Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- Long lifespan 50,000 hours+
- 3-years replacement warranty


Dimensions



AC1011-LED-15W



AC1011-LED-18W



AC1011-LED-30W

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
AC1011-WHTC15S11	9360338001935	15W	677-787lm	Ø258.7*H88.5mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	570*550*300mm
AC1011-WHTC18S11	9360338001942	18W	1056-1231lm	Ø332*H99.4mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	575*380*385mm
AC1011-WHTC30S11	9360338001959	30W	1870-1989lm	Ø386*H106.4mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	650*430*435mm

LED CEILING LIGHT SERIES




White

Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- Long lifespan 50,000 hours+
- 3-years replacement warranty

Dimensions

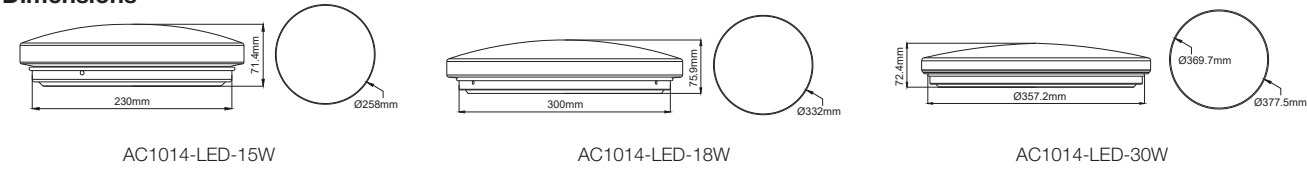


Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
AC1014-WHTC15S14	9360338001966	15W	677-767lm	Ø258.7*H71.4mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	570*480*300mm
AC1014-WHTC18S14	9360338001973	18W	1078-1308lm	Ø332*H75.9mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	500*380*385mm
AC1014-WHTC30S14	9360338001980	30W	1791-2123lm	Ø377.5*H72.4mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	525*440*445mm

LED CEILING LIGHT SERIES




 White
  Chrome



Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- Long lifespan 50,000 hours+
- 3-years replacement warranty


Dimensions

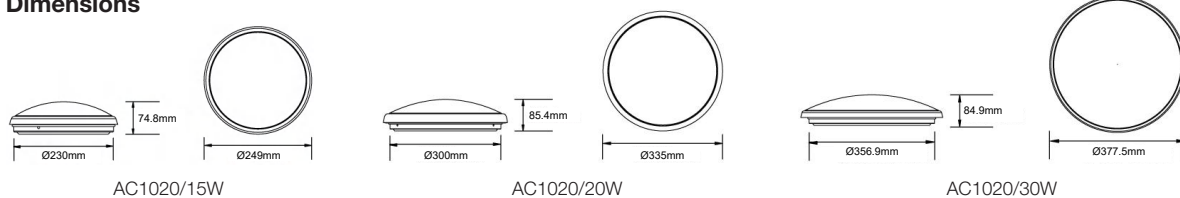

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
AC1020-WHTC15S20	9360338002031	15W	583-682lm	Ø249*H74.8mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	570*480*300mm
AC1020-SCTC15S20	9360338002024	15W	583-682lm	Ø249*H74.8mm	SC	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	570*480*300mm
AC1020-WHTC20S20	9360338002055	20W	871-982lm	Ø335*H85.4mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	575*385*385mm
AC1020-SCTC20S20	9360338002048	20W	871-982lm	Ø335*H85.4mm	SC	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	575*485*385mm
AC1020-WHTC30S20	9360338002079	30W	1750-2060lm	Ø377.5*H84.9mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	650*430*435mm
AC1020-SCTC30S20	9360338002062	30W	1750-2060lm	Ø377.5*H84.9mm	SC	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	650*430*435mm


LED CEILING LIGHT SERIES



Product Features

- Luminaire efficacy of up to 100 lumens per watt
- New design,super slim to 42mm helght
- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- 3-years replacement warranty


Dimensions

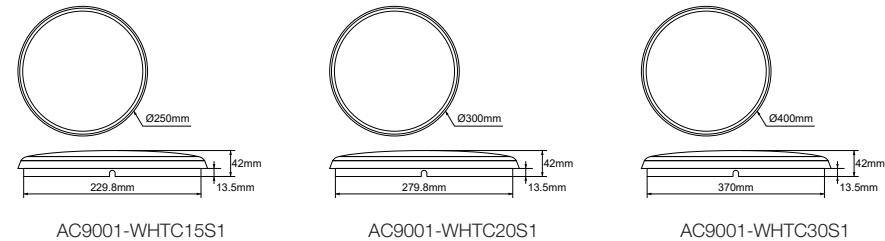

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
AC9001-WHTC15S1	9360338002086	15W	1060-1100lm	Ø250*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	540*320*365mm
AC9001-WHTC20S1	9360338002093	20W	1450-1560lm	Ø300*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	620*330*415mm
AC9001-WHTC30S1	9360338002109	30W	2403-2589lm	Ø400*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	620*430*515mm

LED CEILING LIGHT SERIES

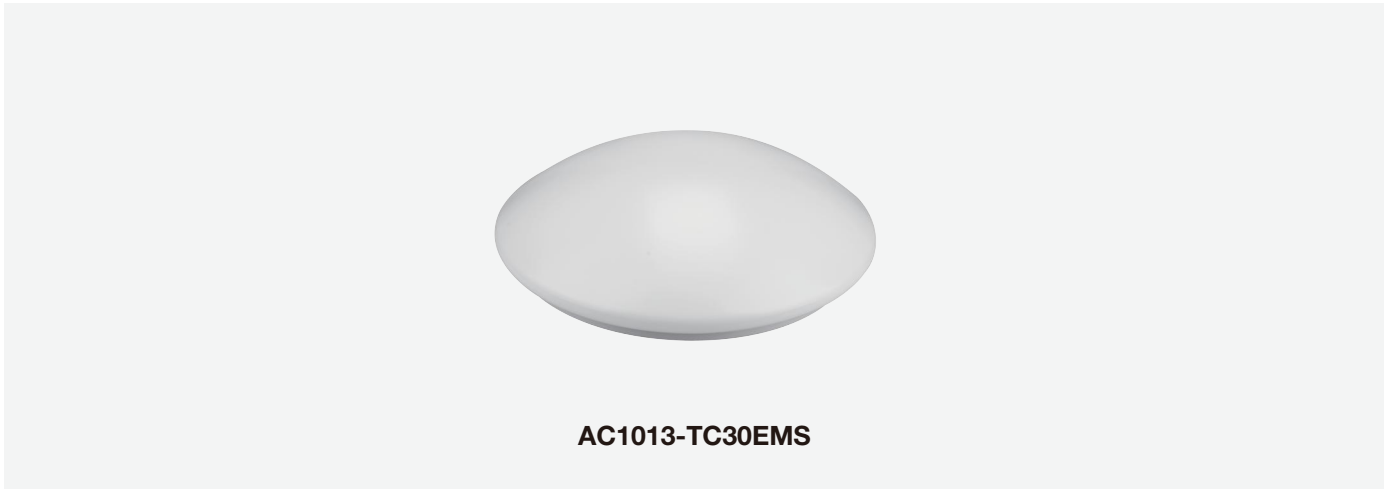

AC1013-TC30EMS


White



Product Features

- Easy Installation
- Replace Existing Light
- No UV and IR radiation
- None Dimmeable
- Long life-span with low power consumption
- PA16 terminal block
- 20mm diameter cable entry hole
- YES,Sensor dimming 20%,1.5W lasing 3Hrs
- Housing Colour Opaque

Dimensions



AC1013-TC30EMS

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
AC1013-TC30EMS	9360338005322	30W	2000-2300-2200lm	Ø380*H105mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	5 PCS/CTN	540*320*400mm

LED CEILING LIGHT SERIES



White

120°

AC 200-240V

CRI 80

PF ≥ 0.9

SMD

IP54

DIM


3000K/4000K/5000K

3 years

Product Features

- Luminaire efficacy of up to 100 lumens per watt.
- New design,super slim to 42mm height.
- 3-CCT changeable.
- Compatible with leading and trailing edge phase cut dimmers.
- 3-years replacement warranty

Dimensions

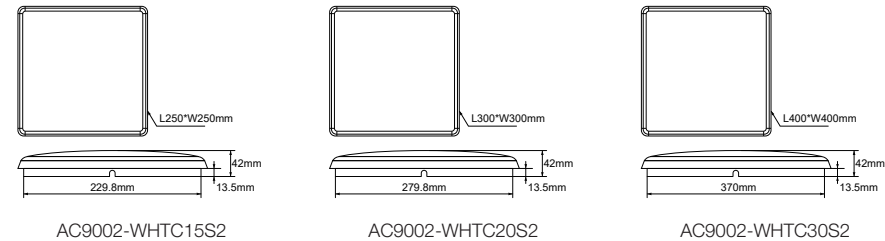

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
AC9002-WHTC15S2	9360338002116	15W	1060-1100lm	250*250*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	L540*W320*H365mm
AC9002-WHTC20S2	9360338002123	20W	1450-1560lm	300*300*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	L620*W330*H415mm
AC9002-WHTC30S2	9360338002130	30W	2403-2589lm	400*400*H42mm	WH	Die-cat Aluminum	120°	3000K/4000K/5000K	10 PCS/CTN	L620*W430*H515mm

LED CEILING LIGHT SERIES



 White



Product Features

- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- Fire rated PC light housing and diffuser
- 3-years replacement warranty

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
AC9004-WHTC15S4	9360338002147	15W	1300-1500lm	Ø250*H45mm	WH	Die-cat Aluminum	120°	3000K/4000K/6000K	10 PCS/CTN	L540*W320*H365mm
AC9004-WHTC25S4	9360338002154	20W	1600-1800lm	Ø300*H50mm	WH	Die-cat Aluminum	120°	3000K/4000K/6000K	10 PCS/CTN	L620*W330*H415mm
AC9004-WHTC30S4	9360338008712	30W	2600-2800lm	Ø400*H58mm	WH	Die-cat Aluminum	120°	3000K/4000K/6000K	10 PCS/CTN	L620*W430*H515mm

LED CEILING LIGHT SERIES



White

160°

AC 200-240V

CRI 80

PF≥0.9

SMD

IP20

DIM


3000K 4000K 5000K

3 years

Product Features

- LED module for fluorescent ceiling lights replacement
- 3-CCT changeable
- Compatible with leading and trailing edge phase cut dimmers
- 3-years replacement warranty


Dimensions

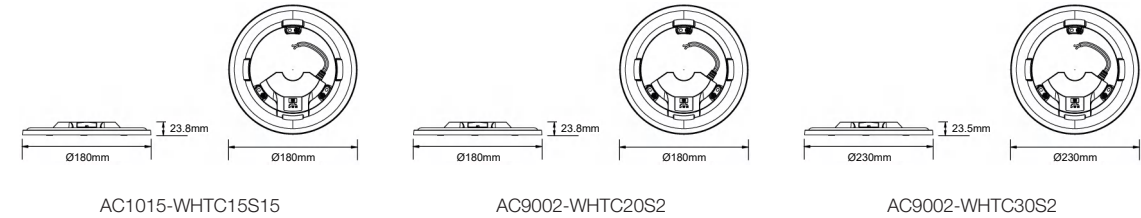

Technical Specification


Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
AC1015-WHTC15S15	9360338001997	15W	1003-1153lm	Ø180*H23.8mm	WH	Die-cat Aluminum	160°	3000K/4000K/5000K	20 PCS/CTN	585*205*200mm
AC1015-WHTC18S15	9360338002000	18W	1516-1773lm	Ø180*H23.8mm	WH	Die-cat Aluminum	160°	3000K/4000K/5000K	20 PCS/CTN	585*205*200mm
AC1015-WHTC30S15	9360338002017	30W	2300-2785lm	Ø230*H23.5mm	WH	Die-cat Aluminum	160°	3000K/4000K/5000K	20 PCS/CTN	585*255*260mm

LED CEILING LIGHT SERIES

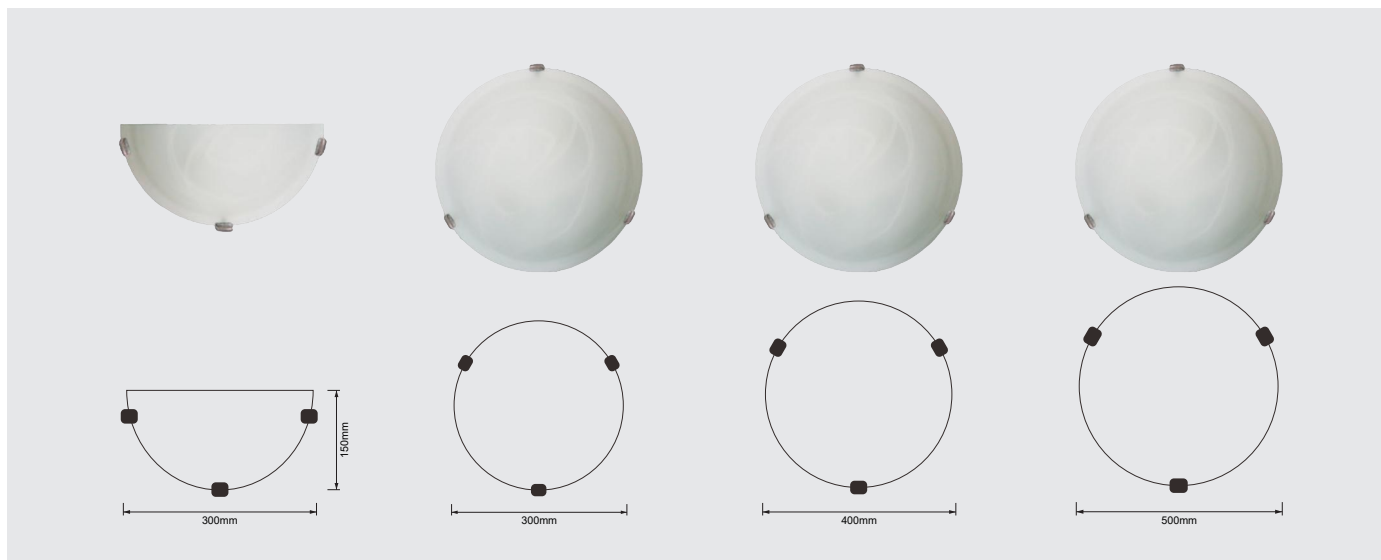


Technical Specification

AC1001/WB	AC1001/30	AC1001/40	AC1001/50
Alabaster wall ight SHC/GD	Alabaster SHC/GD	Alabaster SHC/GD	Alabaster SHC/GD
9360338002192	9360338002161	9360338002178	9360338002185
SIZE:300*150mm	SIZE:300*300mm	SIZE:400*400mm	SIZE:500*500mm
E27 MAX 1×75W	E27 MAX 1×75W	E27 MAX 2×75W	E27 MAX 3×75W
AC240V	AC240V	AC240V	AC240V

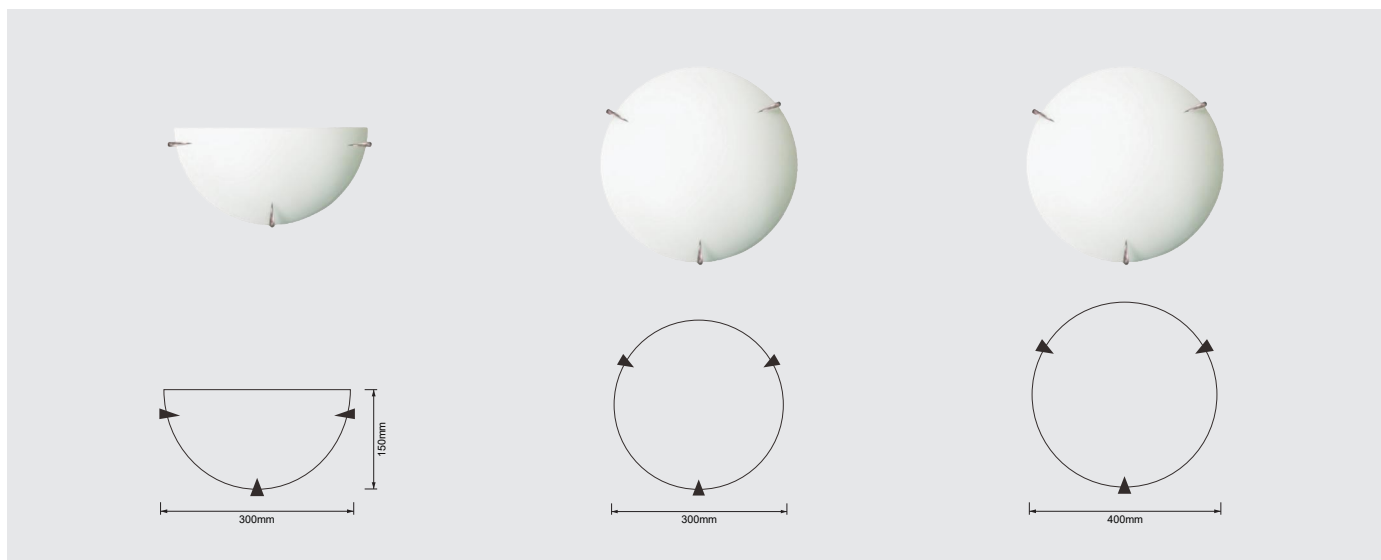

Technical Specification

AC1002/WB	AC1002/30	AC1002/40
Spike wall light	Spike	Spike
9360338002222	9360338002208	9360338002215
Color:sch clip	Color:sch clip	Color:sch clip
SIZE:300×150mm	SIZE:300×300mm	SIZE:400×400mm
E27 MAX 1×75W	E27 MAX 1×75W	E27 MAX 2×75W
AC240V	AC240V	AC240V

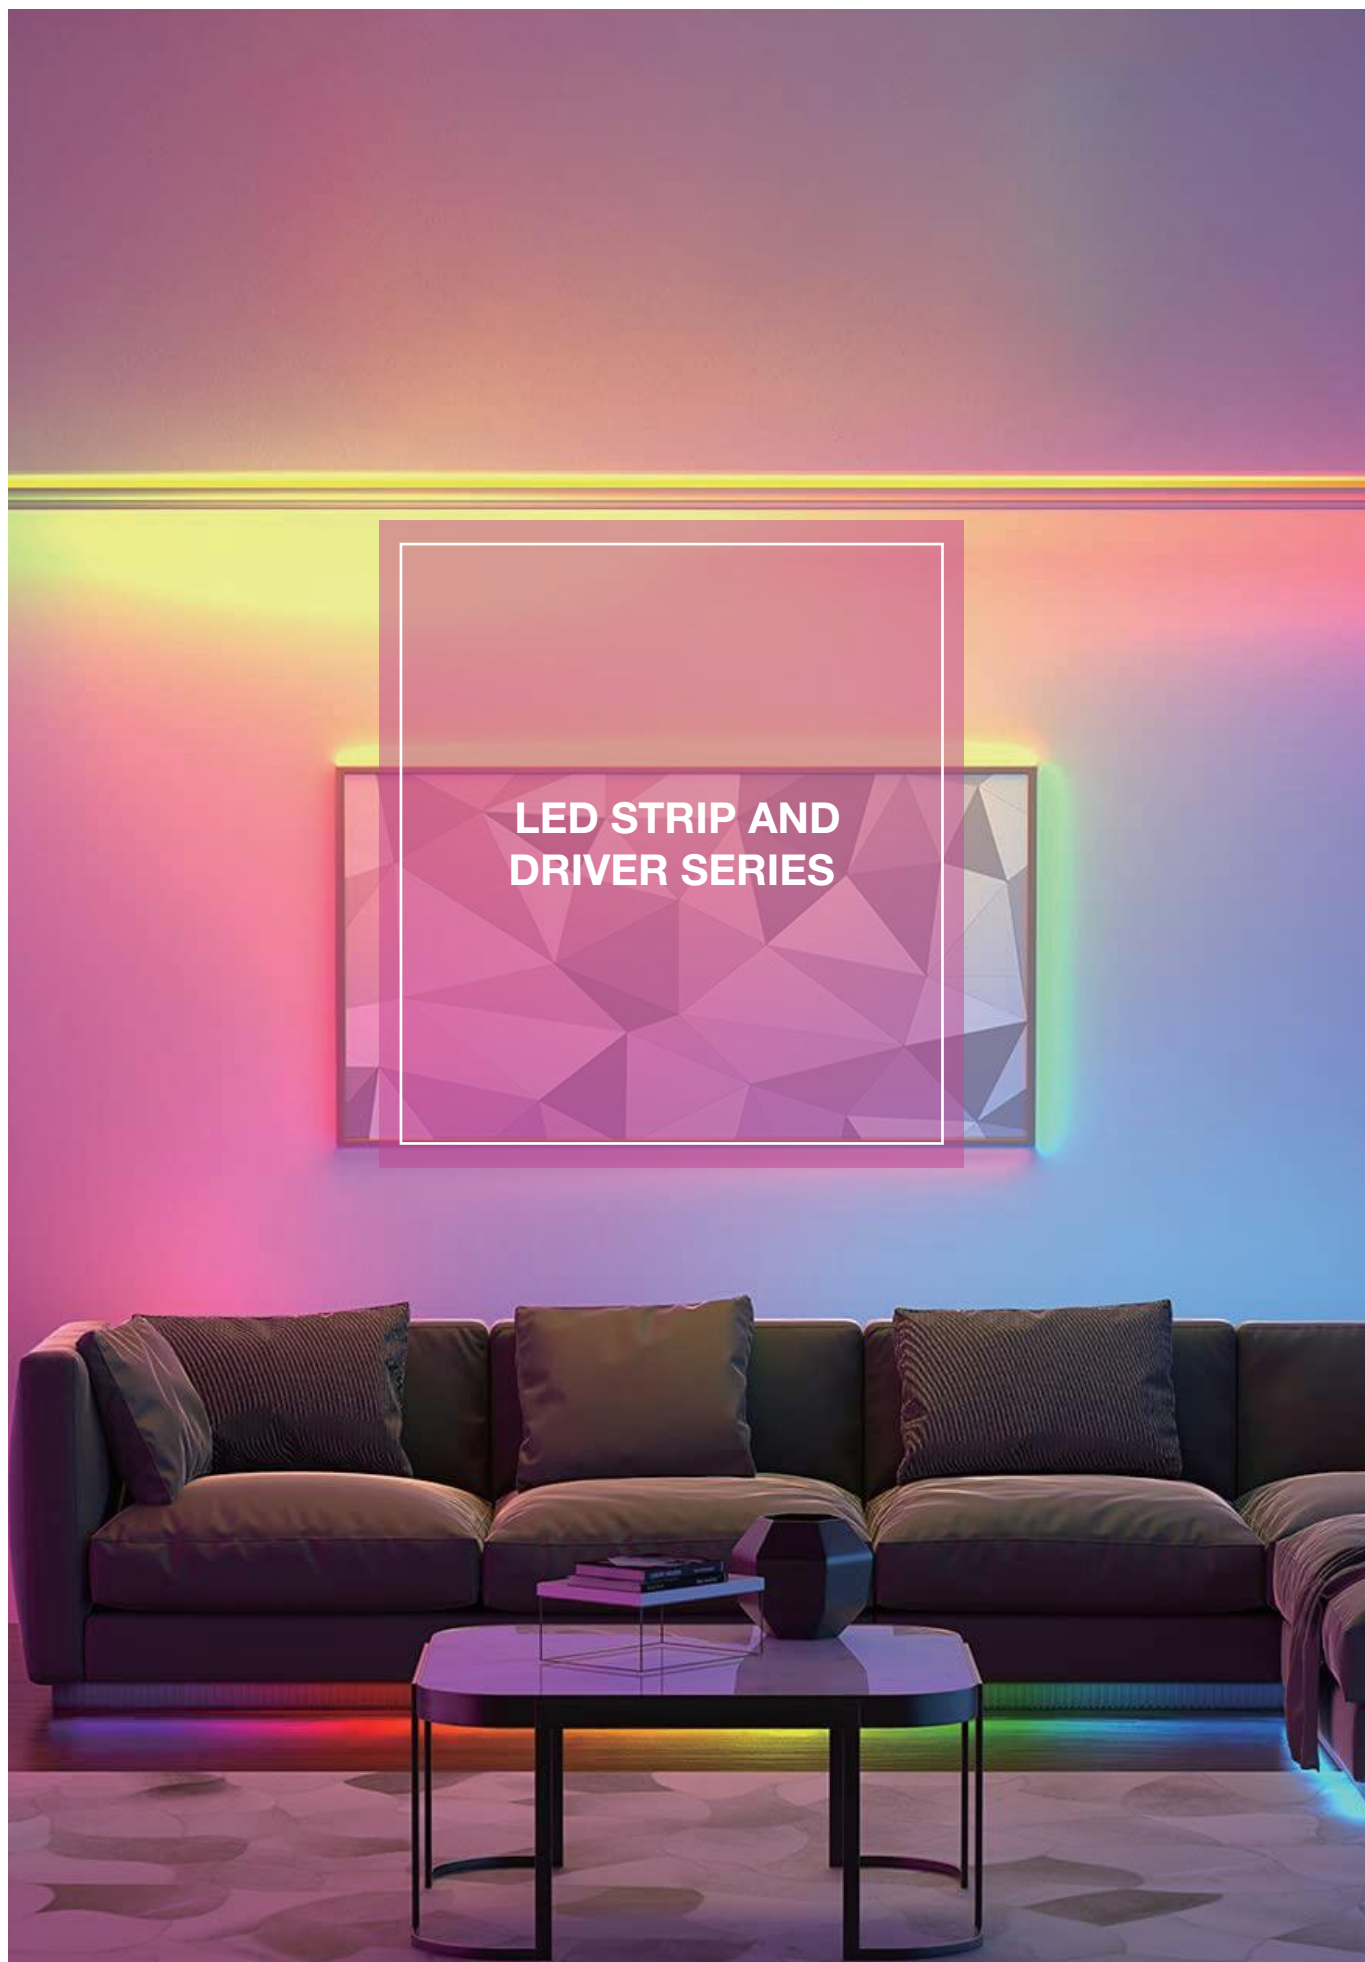

LED STRIP



STRIP/RF-SMD05 RFCCT 5M DC24V

White



Product Features

- 5m/roll, 1 Roll with remote control in the box
- High Brightness DC24V SMD 2835 flexible led strip light
- 5m standard roll with RF433 remote control
- CCT Color adjustable, CCT Brightness adjustable
- 1-100% Stepless dimming
- Maintenance free, easy installation
- Long life 50000 hours.


Applications

- Residential area:-e.g. Kitchen areas
- Commercial areas:-e.g. Reception areas, hotels and shops

Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	CCT	Temp	PCS	Size
STRIP/RF-SMD05 RFCCT 5M DC24V	9360338001430	36W	655lm/m	5m per roll	WH	120°	3000K/6000K	-20°C~+45°C	20 PCS	365*355*360mm

LED STRIP

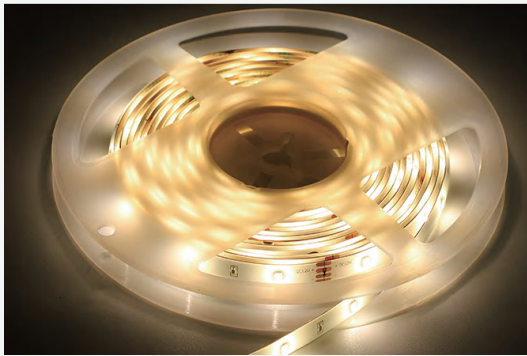

STRIP/SMD01 SMD02



White



Product Features

- 5m/roll,1 Roll in the box(SMD01 5M)
10m/roll,1 Roll in the box(SMD02 10M)
- Connection via WIFI signal and controlled by APP
- Smart Life.The APP compatible with both android-and IOS system
- Third-party intelligent speaker vioce control work with Amazon Alexa and Google assistant
- Function button usage:Turn ON/OFF the device
- Long press over 6's to reset and network pairing
- Variety of APP functions available including:Timer,dimming and color changing,group sharing and account sharing etc

Applications

- Residential area:-e.g.Kitchen areas
- Commercial areas:-e.g.Reception areas,hotels and shops


Technical Specification

Model	Barcode	W	lm	Size	Color		CCT	Temp		
STRIP/TY-SMD01 CCT 5M DC24V	9360338001447	36W	655lm/m	5m per roll	WH	120°	3000K/6000K	-20°C~+45°C	20 PCS	365*355*360mm
STRIP/TY-SMD02 CCT 10M DC24V	9360338001454	72W	655lm/m	10m per roll	WH	120°	3000K/6000K	-20°C~+45°C	20 PCS	505*370*500mm

LED STRIP





White



Product Features

- 5m/roll, 1 Roll in the box(SMD01 5M)
- Connection via WIFI signal and controlled by APP-smart Life.The APP compatible with both Android and IOS system
- Third-party intelligent speaker voice control work with Amazon Alexa and Google assistant
- Function button usage:Turn ON/OFF the device
- Long press over 6's to reset and network pairing
- Variety of APP functions available including:Timer,dimming and color changing,group sharing and account sharing etc

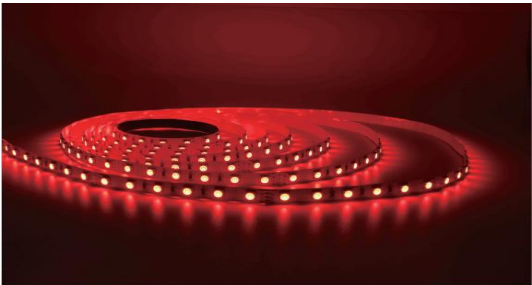


Applications

- Residential area:-e.g.Kitchen areas
- Commercial areas:-e.g.Reception areas,hotels and shops

Technical Specification

Model	Barcode	W	lm	Size	Color		Temp		
STRIP/TY-SMD03 RGB 5M DC24V	9360338001461	36W	80lm/W	5m per roll	WH	120°	-20°C~+45°C	20 PCS	365*355*360mm

LED COB STRIP LIGHT

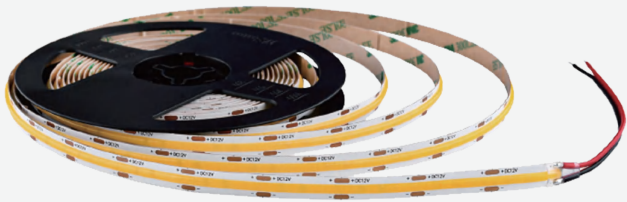

STP-COB-14W-24V-320D-3K/4K/6K-5M/10M



White




Product Features


- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+



Dimensions



STP-COB-14W-24V-320D-3K/4K/6K-5M




STP-COB-14W-24V-320D-3K/4K/6K-10M

Technical Specification

Model	Barcode	W	lm	Size	Color		CCT	Temp	
STP-COB-14W-24V-320D-3K-5M-IP20	9360338010234	14W	1080lm/m	5000*8*1.6mm(5m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
STP-COB-14W-24V-320D-4K-5M-IP20	9360338010111	14W	1200lm/m	5000*8*1.6mm(5m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
STP-COB-14W-24V-320D-6K-5M-IP20	9360338010128	14W	1440lm/m	5000*8*1.6mm(5m per roll)	WH	180°	CW 6000-6500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
STP-COB-14W-24V-320D-3K-10M-IP20	9360338010135	14W	1080lm/m	10000*8*1.6mm(10m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
STP-COB-14W-24V-320D-4K-10M-IP20	9360338010142	14W	1200lm/m	10000*8*1.6mm(10m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
STP-COB-14W-24V-320D-6K-10M-IP20	9360338010159	14W	1440lm/m	10000*8*1.6mm(10m per roll)	WH	180°	CW 6000-6500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)

LED COB STRIP LIGHT

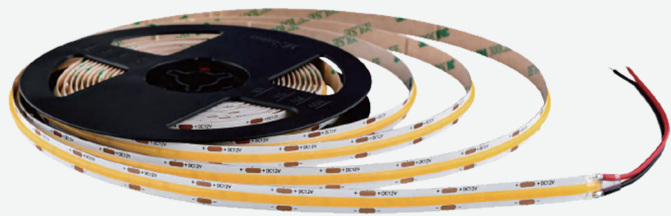

STP-COB-6W-24V-320D

White

DC 24V

COB

CRI 90

IP20


DIM

Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brightness & low power consumption
- High CRI 90+



Dimensions



STP-COB-6W-24V-320D

Technical Specification

Model									
STP-COB-6W-24V-320D-3K-3M-IP20	9360338010593	6W	540lm/m	5000*8*1.6mm(3m per roll)WH	180°	WW 2800-3200K	-20°C~+45°C	5m/roll,1 roll in the bag(24V	
STP-COB-6W-24V-320D-4K-3M-IP20	9360338010609	6W	600lm/m	5000*8*1.6mm(3m per roll)WH	180°	DW 4000-4500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V	
STP-COB-6W-24V-320D-5K-3M-IP20	9360338010616	6W	720lm/m	5000*8*1.6mm(3m per roll)WH	180°	CW 6000-6500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V	

LED COB STRIP LIGHT



STP-COB-6W-24V-320D-3K/4K/5K-5M-IP20



White




Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+



Dimensions



STP-COB-6W-24V-320D-3K/4K/5K-5M-IP20

Technical Specification

Model	Barcode	W	lm	Size	Color		CCT	Temp	
STP-COB-6W-24V-320D-3K-5M-IP20	9360338010678	6W	540lm/m	5000*8*1.6mm(5m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
STP-COB-6W-24V-320D-4K-5M-IP20	9360338010685	6W	600lm/m	5000*8*1.6mm(5m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
STP-COB-6W-24V-320D-5K-5M-IP20	9360338010692	6W	720lm/m	5000*8*1.6mm(5m per roll)	WH	180°	CW 6000-6500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)

LED COB STRIP LIGHT



STP-COB-6W-24V-320D-3K/4K/5K-10M-IP20



White




Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brightness & low power consumption
- High CRI 90+



Dimensions




STP-COB-6W-24V-320D-3K/4K/5K-10M-IP20

Technical Specification

Model	Barcode	W	lm	Size	Color	CCT	Temp	
STP-COB-6W-24V-320D-3K-10M-IP209360338010708		6W	540lm/m	5000*8*1.6mm(10m per roll)WH	180°	WW 2800-3200K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
STP-COB-6W-24V-320D-4K-10M-IP209360338010715		6W	600lm/m	5000*8*1.6mm(10m per roll)WH	180°	DW 4000-4500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
STP-COB-6W-24V-320D-5K-10M-IP209360338010722		6W	720lm/m	5000*8*1.6mm(10m per roll)WH	180°	CW 6000-6500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)

LED COB STRIP LIGHT

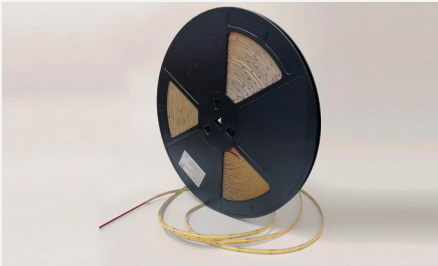

14W 3A-COB-24V-320D-P08-WW/DW/CW/50M




White




Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

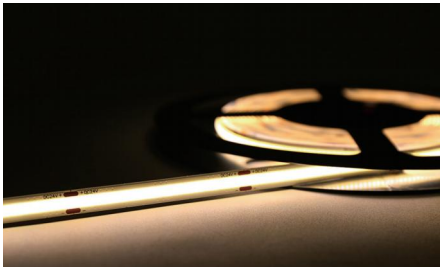

Dimensions



3A-COB-24V-320D-P08-WW/DW/CW-50M

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
3A-COB-24V-320D-P08	14W	1080lm/m	5000*8*1.6mm(50m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 5m)
3A-COB-24V-320D-P08	14W	1200lm/m	5000*8*1.6mm(50m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 5m)
3A-COB-24V-320D-P08	14W	1440lm/m	5000*8*1.6mm(50m per roll)	WH	180°	CW 6000-6500K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 5m)

LED COB STRIP LIGHT



10W 3A-COB-24V-480D-WW/DW/PW

White

DC 24V

COB

CRI 90

IP20


DIM



Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brightness & low power consumption
- High CRI 90+

Dimensions

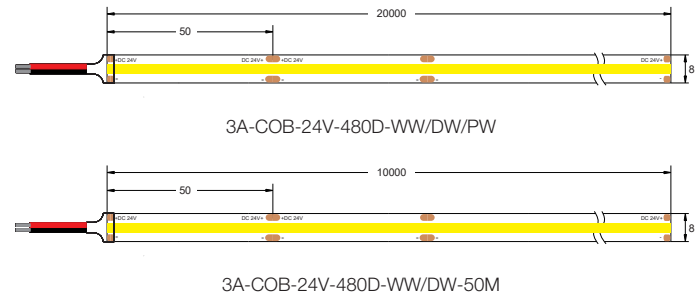

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
3A-COB-24V-480D-WW	10W/m	900lm-1200lm/m	20000*8*2.3mm(20m per roll)	WH	180°	WW 2800-3400K	-20°C~+45°C	20m/roll,1 roll in the bag(24V 20m)
3A-COB-24V-480D-DW	10W/m	900lm-1200lm/m	20000*8*2.3mm(20m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	20m/roll,1 roll in the bag(24V 20m)
3A-COB-24V-480D-PW	10W/m	900lm-1200lm/m	20000*8*2.3mm(20m per roll)	WH	180°	PW 5000-5500K	-20°C~+45°C	20m/roll,1 roll in the bag(24V 20m)
3A-COB-24V-480D-WW-50M	10W/m	900lm-1200lm/m	50000*8*2.3mm(20m per roll)	WH	180°	WW 2800-3400K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 20m)
3A-COB-24V-480D-DW-50M	10W/m	900lm-1200lm/m	50000*8*2.3mm(20m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 20m)

LED COB STRIP LIGHT



9.6W 3A-COB-24V-480D-WW/DW/5M/10M




White



Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

Dimensions

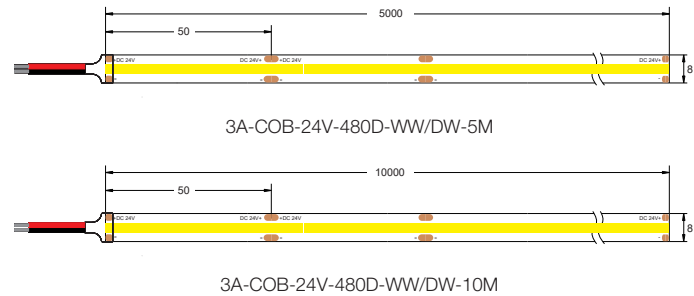

Technical Specification

Model	W	lm	Size	Color	Beam Angle	CCT	Temp	Package
3A-COB-24V-480D-WW-5M	9.6W	900lm-1200lm/m	5000*8*2.3mm(5m per roll)	WH	180°	WW 2800-3400K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
3A-COB-24V-480D-DW-5M	9.6W	900lm-1200lm/m	5000*8*2.3mm(5m per roll)	WH	180°	CW 4000-4800K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
3A-COB-24V-480D-WW-10M	9.6W	900lm-1200lm/m	10000*8*2.3mm(10m per roll)	WH	180°	WW 2800-3400K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
3A-COB-24V-480D-DW-10M	9.6W	900lm-1200lm/m	10000*8*2.3mm(10m per roll)	WH	180°	CW 4000-4800K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)



LED COB STRIP LIGHT



15W 3A-COB-24V-480D-RGB/5M

White

DC 24V

COB

CRI 90


IP20



Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brightness & low power consumption
- High CRI 90+

Dimensions



3A-COB-24V-480D-RGB

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
-------	---	----	------	-------	--	-----	------	--

3A-COB-24V-480D-RGB

15W

/

5000*10*1.2mm(5m per roll)

WH

180°

RGB

-20°C~+45°C

5m/roll,1 roll in the bag(24V 5m)

LED COB STRIP LIGHT



4MM PCB 6W 3A-COB-24V-480D-P04/WW/DW/5M



White


DC 24V

COB

CRI 90

IP20


DIM

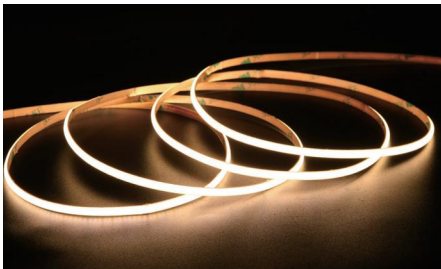

Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

Dimensions




3A-COB-24V-480D-P04-WW/DW

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
3A-COB-24V-480D-P04-WW	6W	480lm/m	5000*8*1.6mm(5m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)
3A-COB-24V-480D-P04-DW	6W	540lm/m	5000*8*1.6mm(5m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	5m/roll,1 roll in the bag(24V 5m)

LED COB STRIP LIGHT

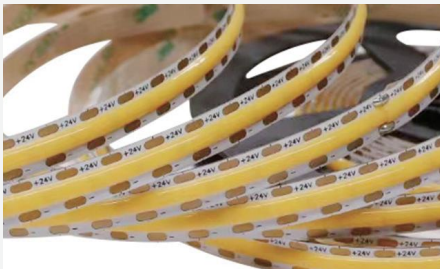

9W FREE CUT 3A-COB-24V-480D-P08-CF-WW/DW/50M



White

DC 24V

COB

CRI 90

IP20


DIM



Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

Dimensions



3A-COB-24V-480D-P08-CF-WW/DW

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
-------	---	----	------	-------	--	-----	------	--

3A-COB-24V-480D-P08-CF-WW 9W	2000lm-2400lm/m	50000*15*1.6mm(50m per roll)	WH	180°	WW 2800-3200K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 50m)
3A-COB-24V-480D-P08-CF-DW 9W	2000lm-2400lm/m	50000*15*1.6mm(50m per roll)	WH	180°	DW 4000-4500K	-20°C~+45°C	50m/roll,1 roll in the bag(24V 50m)

LED COB STRIP LIGHT



20W 3A-COB-24V-1920D-WW/DW/CW-10M




White




Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

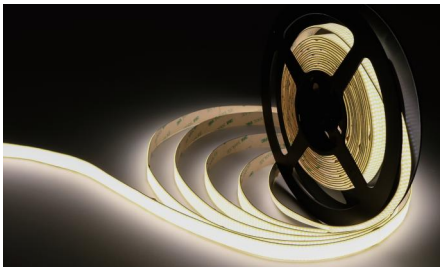

Dimensions

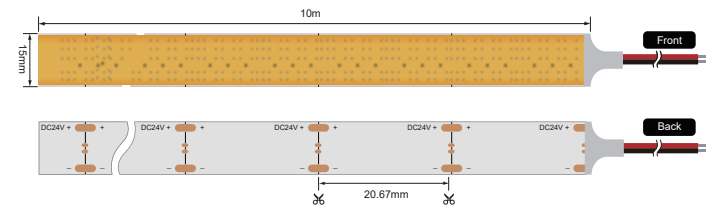


3A-COB-24V-1920D-WW/DW/CW-10M

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
3A-COB-24V-1920D-WW-10M	20W/m	900lm-1200lm/m	10000*15*1.4mm(10m per roll)	WH	180°	WW2800-3200K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
3A-COB-24V-1920D-DW-10M	20W/m	900lm-1200lm/m	10000*15*1.4mm(10m per roll)	WH	180°	DW4000-4500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)
3A-COB-24V-1920D-CW-10M	20W/m	900lm-1200lm/m	10000*15*1.4mm(10m per roll)	WH	180°	CW6000-6500K	-20°C~+45°C	10m/roll,1 roll in the bag(24V 10m)

LED COB STRIP LIGHT

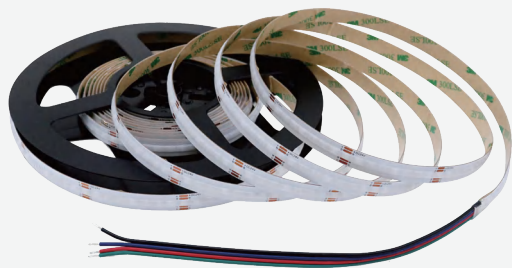

15W 3A-COB-12V-576D-RGB/10M



White

DC 12V

COB

CRI 90

IP65


DIM



Product Features

- New COB LED Strip
- Ideal for LED lighting application to avoid multi-shadows
- Higher heat conductivity for better thermal managemen
- High brigtness & low power consumption
- High CRI 90+

Dimensions



3A-COB-12V-576D-RGB

Technical Specification

Model	W	lm	Size	Color		CCT	Temp	
-------	---	----	------	-------	--	-----	------	--

3A-COB-12V-576D-RGB 15W / 5000*10*1.2mm(5m per roll) WH 180° RGB -20°C~+45°C 5m/roll,1 roll in the bag(12V 5m)

LED AL PROFILE




3A-1506B



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty

Dimensions

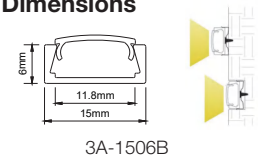


Technical Specification

Model	Size	Color	Material	Length	AL	Transmittance	Accessories
3A-1506B	15*6mm	Silver	PC	3 meters	AL-6063-T5	70%-90%	2 pcs end cap/m, 2 pcs clips/m
3A-1506B	15*6mm	Black	PC	3 meters	AL-6063-T5	70%-90%	2 pcs end cap/m, 2 pcs clips/m

LED AL PROFILE




3A-1708A



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty


Dimensions



Technical Specification

Model	Size	Color	Material	Length	AL	Transmittance	Accessories
3A-1708A	17*8mm	Silver	PC	3 meters	AL-6063-T5	70%-90%	2 pcs end cap/m, 2 pcs clips/m
3A-1708A	17*8mm	Black	PC	3 meters	AL-6063-T5	70%-90%	2 pcs end cap/m, 2 pcs clips/m

LED AL PROFILE

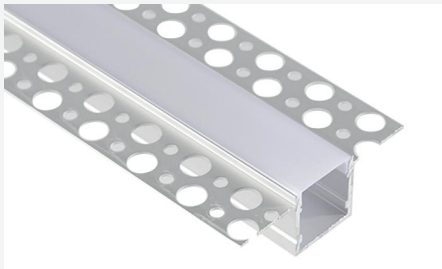

3A-2020C


Siver



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty

Dimensions



3A-2020C

Technical Specification

Model	Size	Color	Material	AL	Transmittance	Accessories
3A-2020C	20*20mm	Silver	PC	AL-6063-T5	50%-80%	2 pcs end cap/m, 6 pcs clips/m

LED AL PROFILE



3A-5213


 Silver



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty

Dimensions

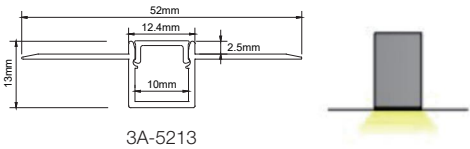

Technical Specification

Model	Size	Color	Material	AL	Transmittance	Accessories
3A-5213	52*13mm	Silver	PC	AL-6063-T5	50%-80%	2 pcs end cap/m, 6 pcs screws

LED AL PROFILE



3A-5035A


- 
White
- 
Black
- 
Siver



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty

Dimensions

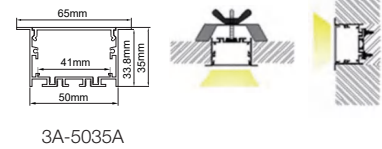

3A-5035A

Technical Specification


Model	Size	Color	Material	AL	Transmittance	Accessories
3A-5035A	50*35mm	White	PC	AL-6063-T5	40%-60%	2 pcs end cap/pc, 2 pcs clips
3A-5035A	50*35mm	Black	PC	AL-6063-T5	40%-60%	2 pcs end cap/pc, 2 pcs clips
3A-5035A	50*35mm	Silver	PC	AL-6063-T5	40%-60%	2 pcs end cap/pc, 2 pcs clips

LED AL PROFILE



3A-6060


 Silver



Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty

Dimensions

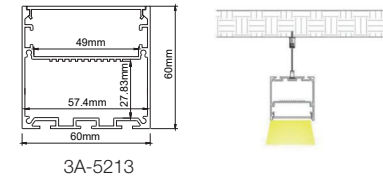


Technical Specification

Model	Size	Color	Material	AL	Transmittance	Accessories
3A-6060	60*60mm	Silver	PC	AL-6063-T5	60%-80%	2 pcs end cap/m, 2 pcs hang wire

LED AL PROFILE




3A-3512

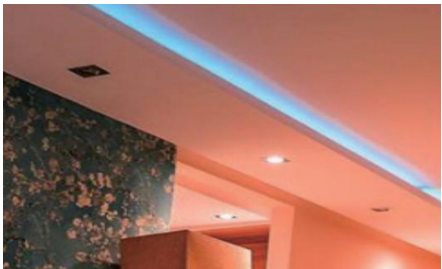

Product Features

- A versatile way to create the perfect LED light installation for any situation. It is rugged, durable, and also works well as an LED heatsink, thereby extending the life of your LED light strips. - use for Kitchen cabinets, interior accent lighting, Store shelf, exhibition booth LED lighting, Office decoration LED lighting
- Home using residential building decorations lighting
- 3 Years Replacement Warranty


Dimensions

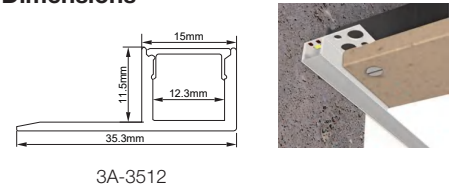

Technical Specification


Model	Size	Color	Material	AL	Transmittance	Accessories
3A-3512	35.3*11.5mm	Silver	PC	AL-6063-T5	50%-80%	2 pcs end cap/m, 6 pcs screws

AU PLUG

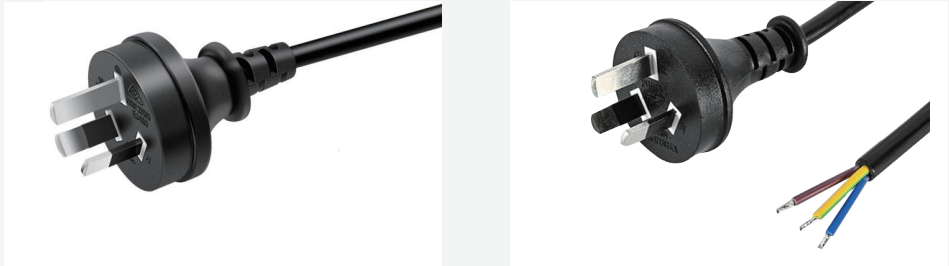

0.75m² SAA 3A-AU PLUG

Dimensions

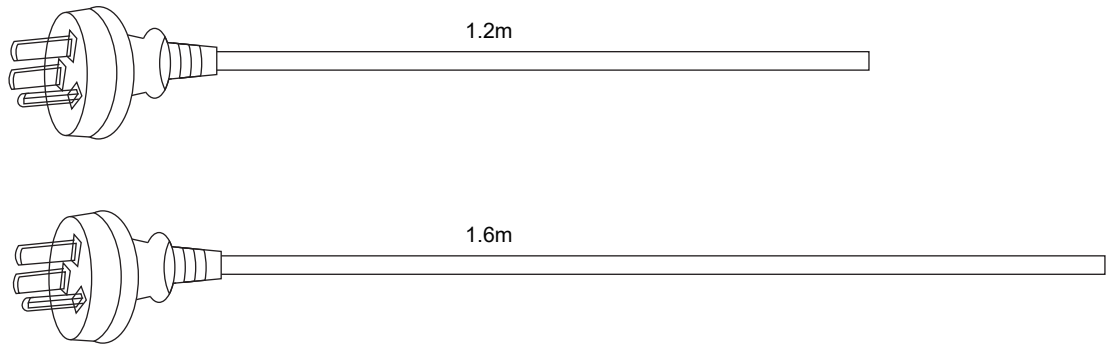


LED POWER SUPPLY



3A-DR-CV-20/30/60/80/100/150/200-24 with AU Plug

AC
200-240V

Dimensions

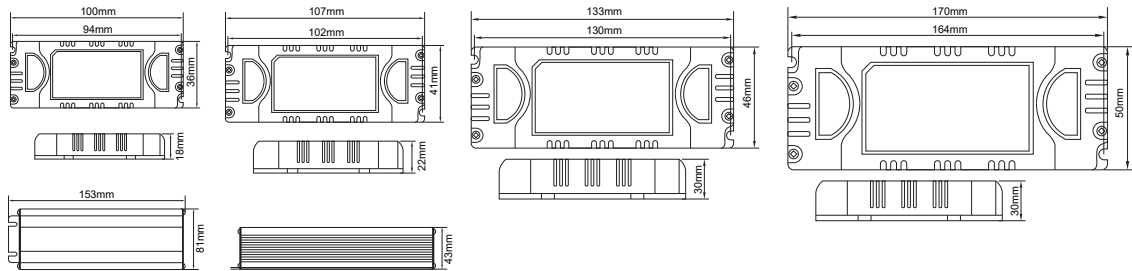


3A-DR-CV-20/30/60/80/100/150/200-24 with AU Plug

Technical Specification

Model	W	Output voltage	Output current	Size	IP	PF	Dimmable	Temp
3A-DR-CV-20-24	20W	24V	830mA	100*36*18mm	IP20	>0.9	No dimmable	85°C
3A-DR-CV-80-24	80W	24V	3.3A	170*50*30mm	IP20	>0.9	No dimmable	85°C
3A-DR-CV-30-24	30W	24V	1.25A	107*41*22mm	IP20	>0.9	Triac dimmable	85°C
3A-DR-CV-60-24	60W	24V	2.5A	133*46*30mm	IP20	>0.9	Triac dimmable	85°C
3A-DR-CV-80-24	80W	24V	3.3A	170*50*30mm	IP20	>0.9	Triac dimmable	85°C
3A-DR-CV-100-24	100W	24V	4.2A	189*65*30mm	IP67	>0.9	Triac dimmable	85°C
3A-DR-CV-150-24	150W	24V	6.25A	153*81*43mm	IP67	>0.9	Triac dimmable	85°C
3A-DR-CV-200-24	200W	24V	8.3A	153*81*43mm	IP67	>0.9	Triac dimmable	85°C

LED POWER SUPPLY

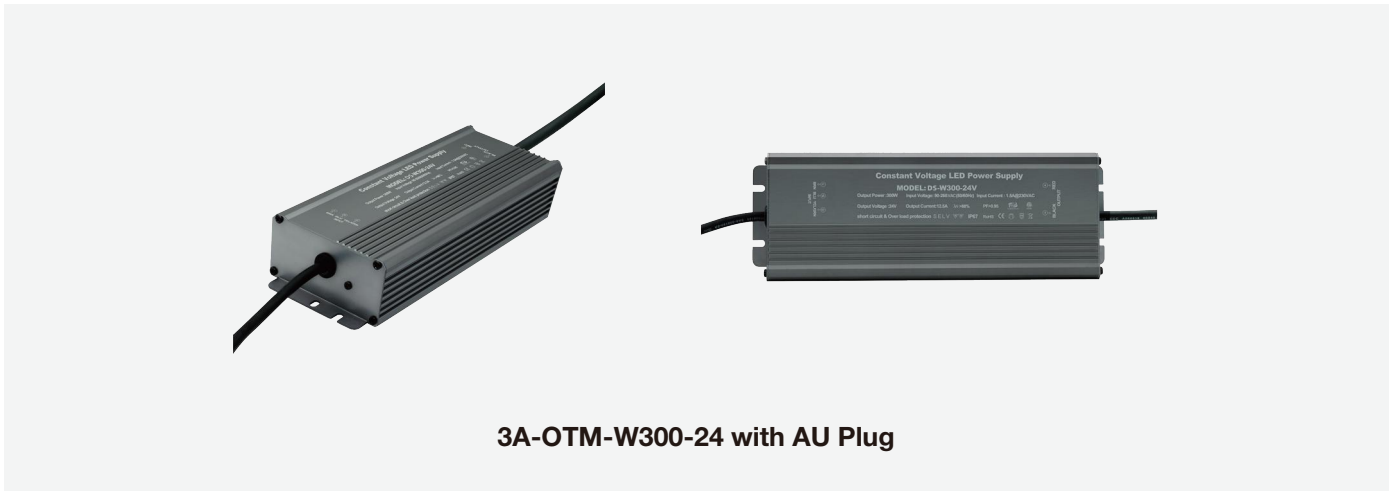


3A-OTM-W300-24 with AU Plug

AC
100-240V

IP67

Dimensions

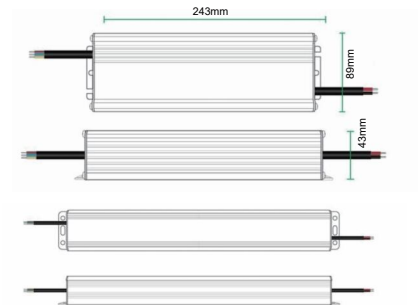

3A-OTM-W300-24 with AU Plug

Technical Specification

Model	W	Output voltage	Output current	Size	PF	Dimmable	Temp
3A-OTM-W300-24	300W	24V	12.5A	243*89*43mm	>0.9	No dimmable	85°C

LED ADAPTER




KS65DU-2400250 with AU Plug

AC
100-240V

IP20

Dimensions

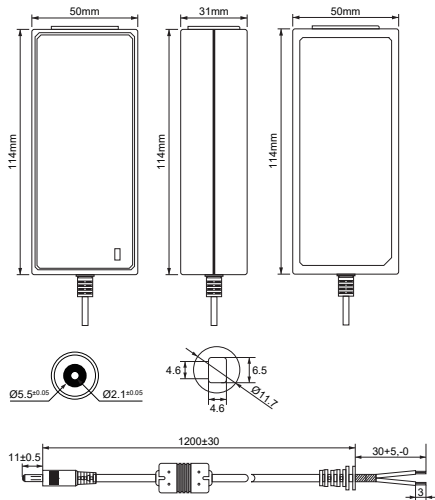

KS65DU-2400250

Technical Specification

Model	W	Output voltage	Output current	Size	PF	Dimmable	Temp
KS65DU-2400250	60W	24V	2.5A	114*50*31mm	0.5-0.7	No dimmable	85°C

LED ADAPTER




KS100DU-2400400 with AU Plug

AC
100-240V

IP20

Dimensions

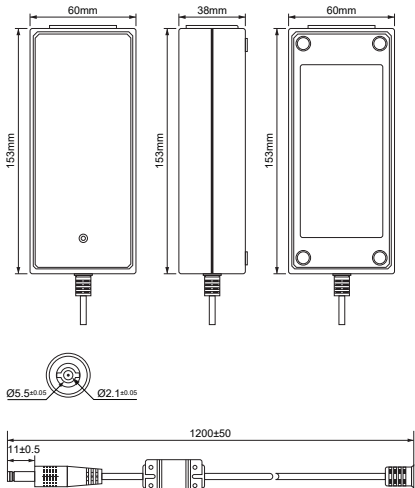

KS100DU-2400400

Technical Specification

Model	W	Output voltage	Output current	Size	PF	Dimmable	Temp
KS100DU-2400400	96W	24V	4A	153*60*38mm	0.5-0.7	No dimmable	85°C

LED ADAPTER




KS65DU-2400250 with AU Plug

AC
100-240V

IP20

Dimensions

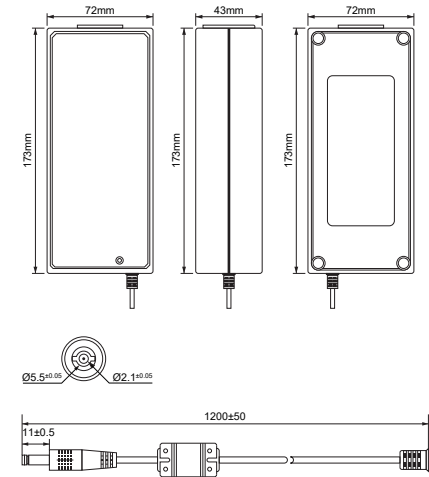


KS150DU-2400500

Technical Specification


Model	W	Output voltage	Output current	Size	PF	Dimmable	Temp
KS150DU-2400500	120W	24V	5A	173*72*43mm	0.5-0.7	No dimmable	85°C

LED CONNECTORS



3A-BCI-N8BB-2


Dimensions



3A-BCI-N8BB-2


Technical Specification

Model	Type	Fits
3A-BCI-N8BB-2	Strip to Strip, on wire	For 8mm PCB LED COB Strip IP20



3A-BCI-N8XB-2

Dimensions



3A-BCI-N8XB-2


Technical Specification

Model	Type	Fits
3A-BCI-N8XB-2	Strip to Strip, wire length 15cm	For 8mm PCB LED COB Strip IP20



3A-BCI-N8BXB-2


Dimensions



3A-BCI-N8BXB-2


Technical Specification

Model	Type	Fits
3A-BCI-N8BXB-2	Strip to Strip, wire length 15cm	For 8mm PCB LED COB Strip IP20



3A-BCI-N8-2L

Dimensions




3A-BCI-N8-2L

Technical Specification


Model	Type	Fits
3A-BCI-N8-2L	Strip to Strip, corner type	For 8mm PCB LED COB Strip IP20

LED CONNECTORS



3A-BCI-N10BB-2

Dimensions



3A-BCI-N10BB-2


Technical Specification

Model	Type	Fits
3A-BCI-N10BB-2	Strip to Strip,on wire	For 10mm PCB LED COB Strip IP20



3A-BCI-N10XB-2


Dimensions



3A-BCI-N10XB-2


Technical Specification

Model	Type	Fits
3A-BCI-N10XB-2	Strip to Strip,wire length 15cm	For 10mm PCB LED COB Strip IP20



3A-BCI-N10BXB-2


Dimensions



3A-BCI-N10BXB-2


Technical Specification

Model	Type	Fits
3A-BCI-N10BXB-2	Strip to Strip,wire length 15cm	For 10mm PCB LED COB Strip IP20



3A-BCI-N10-2L

Dimensions




3A-BCI-N10-2L

Technical Specification


Model	Type	Fits
3A-BCI-N10-2L	Strip to Strip,corner type	For 10mm PCB LED COB Strip IP20

LED CONNECTORS

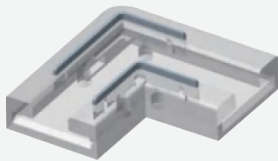

3A-BCI-N10-3/4L


Dimensions



3A-BCI-N10-3/4L


Technical Specification

Model	Type	Fits
3A-BCI-N10-3/4L	Strip to Strip,corner type	For 10mm PCB LED COB Strip IP20

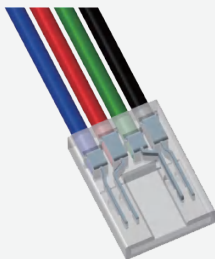

3A-BCI-N10XB-4


Dimensions



3A-BCI-N10XB-4


Technical Specification

Model	Type	Fits
3A-BCI-N10XB-4	Strip to Strip,wire length 15cm	For 10mm PCB LED COB Strip IP20



3A-BCI-N10BXB-4

Dimensions




3A-BCI-N10BXB-4

Technical Specification

Model	Type	Fits
3A-BCI-N10BXB-4	Strip to Strip,wire length 15cm	For 10mm PCB LED COB Strip IP20

LED STRIP SENSOR

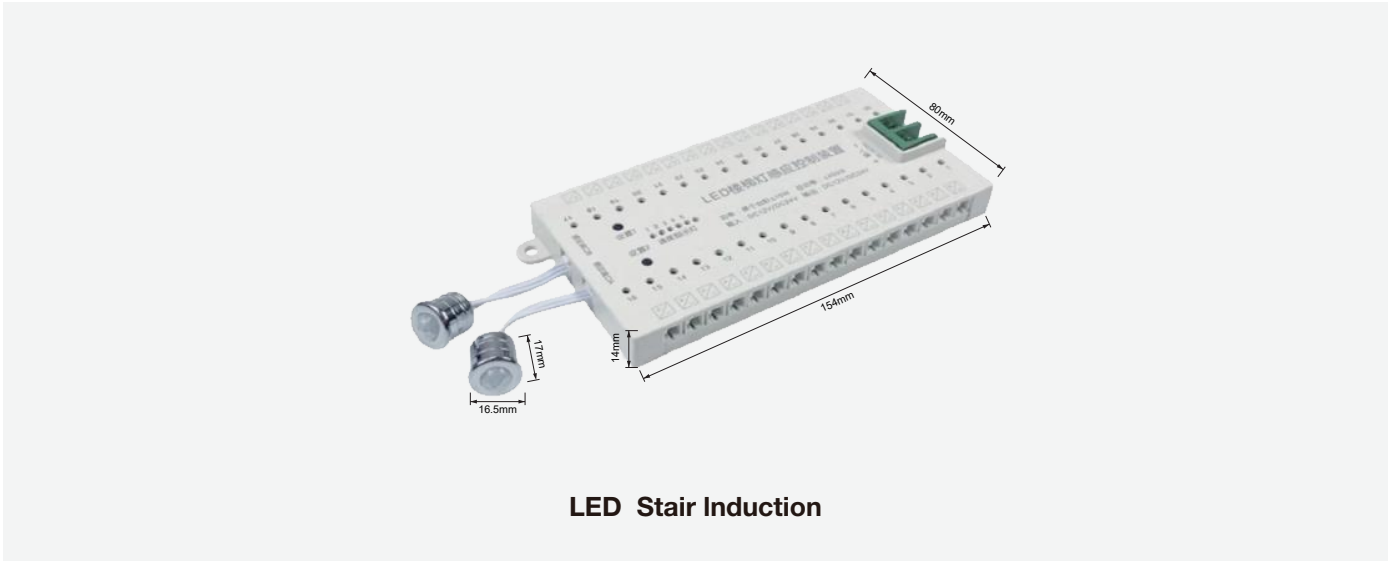


LED Stair Induction




Product Features

- Set 1 and Set 2 buttons to adjust the number of stairs, lighting speed setting, brightness setting and lighting delay setting

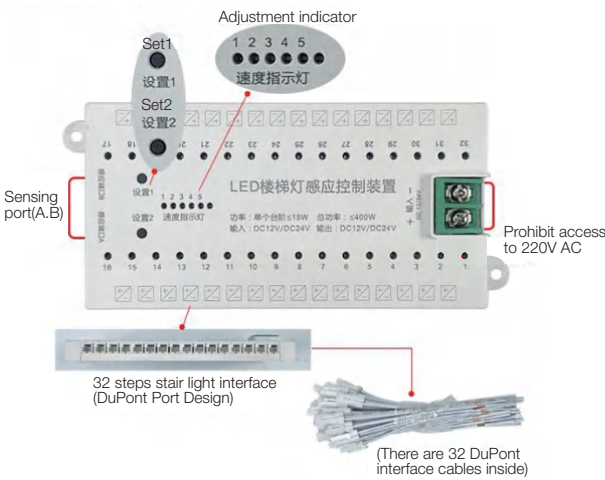

Installation method

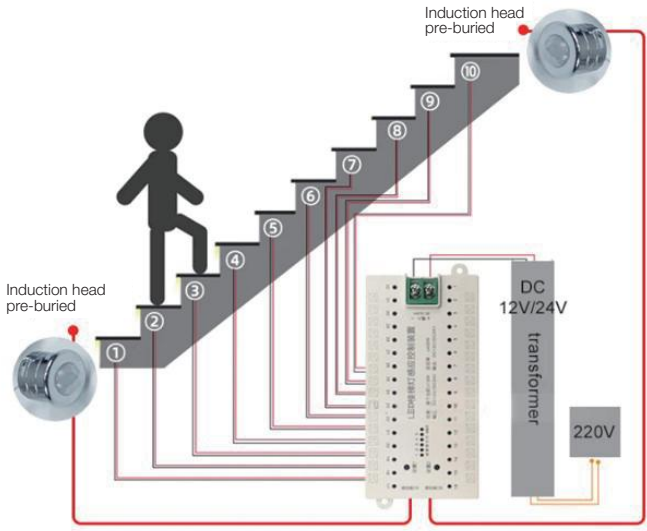

Technical Specification

Input voltage	Output voltage	Single Step Power	Size	Total Power	Port connection	Induction head	Sensing distance	Sensing angle
DC12V-24V	DC12V-24V	<15W	L154*W80*H14mm	<400W	32	2(A.B)	1-3m	1-3m

LED STRIP AND DRIVER SERIES

12V 20W Driver

**Q4 12V 20W**

12V 40W Driver

**Q8H-12V-40W**

12V 70W Driver

**Q8H-12V-75W**

24V 40W Driver

**DR-40W 24V Q8H**

12V 36W AC/DC Adaptor

**36W STRIP DRIVER**

12V 72W AC/DC Adaptor

**72W STRIP DRIVER**

Technical Specification

Model	Barcode	W	AC	Output voltage	PF	IP	Output current	Efficiency full load	Ambient Temp	Max.Casing Temp
Q4 12V 20W	9360338011934	20W	AC220-240V	12V	0.80	IP20	0-1.7A	82%	-20...-50°C	80°C
Q8H-12V-40W	9360338011941	40W	AC220-240V	12V	0.95	IP20	0-3.3A	85%	-20...-50°C	85°C
Q8H-12V-75W	9360338011958	75W	AC220-240V	12V	0.95	IP20	0-6.3A	88%	-20...-50°C	85°C
DR-40W 24V Q8H	9360338005926	40W	AC220-240V	24V	0.95	IP20	0-1.7A	86%	-20...-50°C	85°C
36W STRIP DRIVER	9360338005971	36W	AC100-240V	12V	0.95	IP20	0-3A	86%	-20...-50°C	85°C
72W STRIP DRIVER	9360338005964	76W	AC100-240V	12V	0.95	IP20	0-6A	86%	-20...-50°C	85°C

LED STRIP AND DRIVER SERIES

12V 40W Weather Proof Driver

**V6-40-12V**

12V 100W Weather Proof Driver

**V6-100-12V**

12V 200W Weather Proof Driver

**V6-200-12V**

24V 200W Weather Proof Driver

**V6-200-24V**

Technical Specification

Model	Barcode	W	AC	Output voltage	PF	IP	Output current	Efficiency full load	Ambient Temp	Max.Casing Temp
V6-40-12V	9360338011965	40W	AC1000-240V	12V	0.95	IP67	0-3.3A	86%	-20...+50°C	80°C
V6-100-12V	9360338011972	100W	AC1000-240V	12V	0.95	IP67	0-8.34A	86%	-20...+50°C	80°C
V6-200-12V	9360338011989	200W	AC100-240V	12V	0.95	IP67	0-16.67A	90%	-20...+50°C	80°C
V6-200-24V	9360338011996	200W	AC100-240V	24V	0.95	IP67	0-8.34A	91%	-20...+50°C	80°C

LED DRIVER



Product Features

- Constant Current Mode+Constant Voltage Mode Output
- Metal Casing with Grounding Design
- Built-in Active PFC Function
- No-load/Standby Power Consumption<0.5W
- IP67/IP65 Protection Rating, Suitable for Indoor and Outdoor Installation
- Optional Features: Internal Potentiometer Adjustment for Output, Triac Dimming (Dim-to-Off), Smart Timer Dimming, DALI
- Long lifespan 50,000 hours+
- 5-years replacement warranty

Dimensions



ELG-240-36A

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	PF	Size
ELG-240-36A	36V	18-36V	6.66A	92%	200-305VAC:239.76W/100-180VAC:180W	PF≥0.97/115VAC,PF≥0.95/230VAC,PF≥0.92/277VAC	244*71*37.5mm

LED DRIVER




HLG-600H-24A



Product Features

- Constant Voltage Mode+Constant Current Mode Output
- Metal Casing,Class I Design
- Standby Power Consumption <0.5W when Remotely Shut Down
- IP67/IP65 Protection Rating, Suitable for Indoor and Outdoor Installation
- Optional Function:Internal Potentiometer Adjustment for Output and Three-in-One Dimming
- Lifespan >62,000 Hours
- 7-Year Warranty

Dimensions

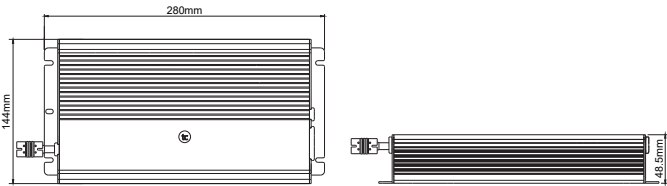

HLG-600H-24A

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	PF	Size
HLG-600H-24A	24V	12-24V	25A	95%	600W	PF≥0.98/115VAC,PF≥0.95/230VAC,PF≥0.93/277VAC	280*144*48.5mm


LED DRIVER



Product Features

- Constant Voltage Mode Design
- LPVL-150:90~132VAC Input Range/LPV-15:180~305VAC Input Range
- IP67 Fully Protected Type
- Class II Power Supply, No FG
- Protection Types: Short Circuit/Overload/Over Voltage/Over Temperature
- Insulated Plastic Casing

Dimensions

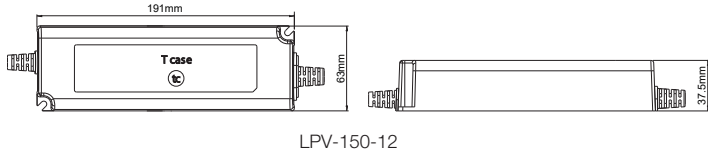

Technical Specification

Model	Output voltage	Current Range	Output current	Efficiency	Rated Power	Size
LPV-150-12	12V	0-10A	10A	87%	120W	191*63*37.5mm


LED DRIVER



Product Features

- Constant Power Mode Output
- Metal Casing Design with Functional Grounding
- Built-in Active PFC Function
- Class 2 Power Supply
- No-Load/Standby Power Consumption <0.5W
- IP67 Protection Rating, Suitable for Indoor and Outdoor Installation
- Long lifespan 50,000 hours+
- 5-years replacement warranty

Dimensions

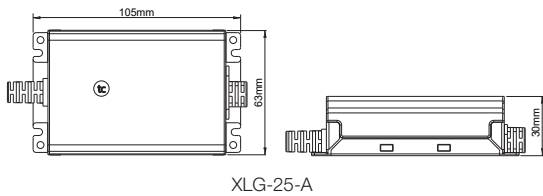

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	PF	Size
XLG-25-A	57V	22-54V	700mA	88%	90VAC-305VAC:25W	PF≥0.97/115VAC,PF≥0.95/230VAC,PF≥0.92/277VAC	105*63*30mm


LED DRIVER



Product Features

- Wide Input Range 100-305VAC(Class I)
- Full Power Output in 70%-100% Constant Power Mode
- Metal Casing with Waterproof Design,IP67 Protection Rating
- Class 2 Power Supply(Except L-Type)
- Withstands 440VAC Voltage Stress for Up to 48 Hours
- Long lifespan 50,000 hours+
- 5-years replacement warranty

Dimensions

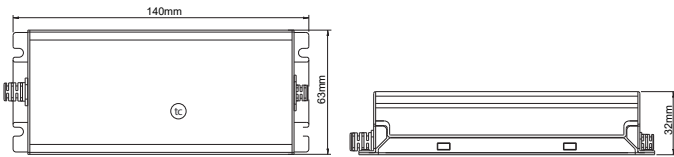

XLG-75-12-A

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	PF	Size
XLG-75-12-A	12V	8.4-12V	5A	89%	60W	PF≥0.97/115VAC,PF≥0.95/230VAC,PF≥0.92/277VAC	140*63*32mm


LED DRIVER



Product Features

- Wide Input Range 100-305VAC(Class I)
- Full Power Output in 70%-100% Constant Power Mode
- Metal Casing with Waterproof Design,IP67 Protection Rating
- LVLE(H-Type),Class 2 Power Supply(24V)
- Long lifespan 50,000 hours+
- 3-years replacement warranty

Dimensions

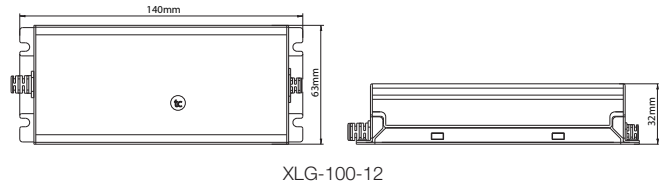

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	Size
XLG-100-12	12V	8.4-12V	8A	92%	96W	140*63*32mm


LED DRIVER



Product Features

- Wide Input Range 100-305VAC(Class I)
- Full Power Output in 70%-100% Constant Power Mode
- Metal Casing with Waterproof Design,IP67 Protection Rating
- Long lifespan 50,000 hours+
- 3-years replacement warranty

Dimensions

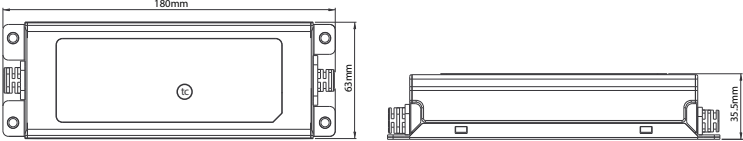

XLG-150-12

Technical Specification

Model	Output voltage	Output voltage	Output current	Efficiency	Rated Power	Size
XLG-150-12	12V	8.4-12V	12.5A	91.5%	150W	180*63*35.5mm


LED DRIVER



Product Features

- Wide Input Range 100-305VAC(Class I)
- Full Power Output in 70%-100% Constant Power Mode
- Metal Casing with Waterproof Design,IP67 Protection Rating
- Long lifespan 50,000 hours+
- 3-years replacement warranty

Dimensions

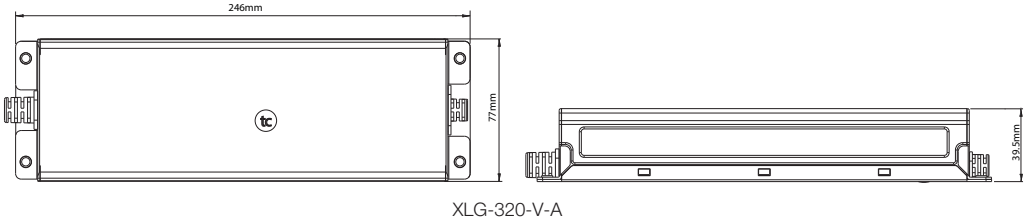

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	Rated Power	PF	Size
XLG-320-V-A	24V	NC	13A	93%	24V/312W,12V/216W	PF≥0.98/115VAC,PF≥0.95/230VAC,PF≥0.92/277VAC	246*77*39.5mm

LED CONNECTORS



10-220-240-250


AC
220-240V

IP20

Product Features

- Up to 30'000 h lifetime
- Output voltage:24VDC–42VDC
- Fixed Output (i.e.no dimming)
- Output power:6W–10.5W
- Input voltage:220–240 VAC–SELV
- Suitable for class I and II luminaires
- Ambient temp range,ta:-20°C to+50°

Dimensions



10-220-240-250

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	PF	Pat LM	SVM	Rated Power	Size
10-220-240-250	300V	24-42V	250mA	85%	0.9	≤1	≤0.4	12.6W	90*43*22mm

LED CONNECTORS



12-220-240-300


AC
220-240V

IP20

Product Features

- Up to 30'000 h lifetime
- Output voltage:24VDC–42VDC
- Fixed Output (i.e.no dimming)
- Output power:6W–10.5W
- Input voltage:220–240 VAC–SELV
- Suitable for class I and II luminaires
- Ambient temp range,ta:-20°C to+50°

Dimensions




12-220-240-300

Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
12-220-240-300	300V	24-42V	300mA	85%	0.95	≤1	≤0.4	12.6W	90*43*22mm

DALI DRIVER

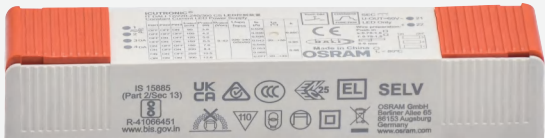

12-220-240-300CS


AC
220-240V

IP20

Product Features

- Output currents:90/100/120/150/180/200/250/300mA
- Output voltage:9VDC–42VDC
- Amplitude dimming 1...100%*
- Low stand-by consumption <0.5W
- Ambient temp range,ta:-20°C to+50°C
- Dipswitch interface
- Touch DIM/Corridor Function
- Suitable for class I and II luminaires
- 50,000 hours lifetime

Dimensions



Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
12-220-240-300CS	300V	9-42V	300mA	81%	0.98	≤1	≤0.4	12.6W	130*30*22.2mm

DALI DRIVER



40-220-240-1A0


AC
220-240V

IP20

Product Features

- Output currents:700/750/800/850/900/950/1000/1050mA
- Output voltage:23VDC~42VDC
- Output power:16.1W – 44.1W
- Suitable for class II luminaires
- Fixed Output (no dimming)
- Low ripple,Low THD
- Extra small housing
- 50'000 hours lifetime at tc-max=80°C

Dimensions



Technical Specification

Model	Output voltage	Constant Current	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
40-220-240-1A0	300V	23-42V	700/750/800/850/900/950/1000/1050mA	89%	0.98	≤1	≤0.4	44.1W	90*43*22mm

LED CONNECTORS




40-220-240-1A0 CS T-B



Product Features

- AC Supply Voltage 220-240Vac
- Line frequency: 50Hz/60Hz
- Line voltage: 198...264V
- SELV LED driver in track adaptor
- Lifetime 50 000 hat tc max
- Dip-switches for easy output current selection
- Low THD <10% @full load
- Low LF-ripple <5%

Dimensions




40-220-240-1A0 CS T-B

Technical Specification

Model	Constant Current	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
40-220-240-1A0 CS T-B	27-42V	700/750/800/850/900/950/1000/1050mA	90%	0.96	≤1	≤0.4	44.1W	167*33*46mm

LED CONNECTORS

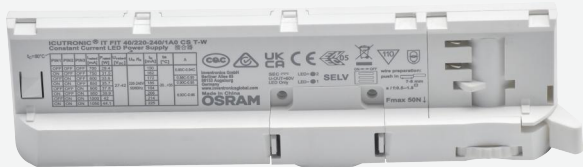

40-220-240-1A0 CS T-W


AC
220-240V

IP20

Product Features

- AC Supply Voltage 220-240Vac
- Line frequency: 50Hz/60Hz
- Line voltage: 198...264V
- SELV LED driver in track adaptor
- Lifetime 50 000 hat tc max
- Dip-switches for easy output current selection
- Low THD <10% @full load
- Low LF-ripple <5%

Dimensions



40-220-240-1A0 CS T-W

Technical Specification

Model	Constant Current	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
40-220-240-1A0 CS T-B	27-42V	700/750/800/850/900/950/1000/1050mA	90%	0.85C-0.96	≤1	≤0.4	44.1W	167*33*46mm

DALI DRIVER



42-220-240-1050 CS


AC
220-240V

IP20

Product Features

- Dipswitch interface
- Touch DIM/Corridor Function
- Low ripple <5% , Low THD <10%
- Suitable for class I and II luminaires
- Low stand-by consumption <0.5W
- 50,000 hours lifetime at tc max

Dimensions



42-220-240-1050 CS

Technical Specification

Model	Output current	Efficiency	PF	Pst LM	SVM	Rated Power	Size
42-220-240-1050 CS	700/750/800/850/900/950/1000/1050mA	89%	0.98	≤1	≤0.4	42W	97*43*29.5mm



**LED NEON
LIGHT SERIES**

LED NEON LIGHT SERIES



N1615D-Top



White

12V DC

CRI 90

Product Features

- Anti-yellowing and heat resisting silicone glue,chemical resistance acid and alkaline,available for extremely terrible outdoor environment
- Uniform and soft luminance,no light spot
- Super brightness large chip,golden wire welded and copper led holder for quicker heat dissipation,higher stability,longer life span
- Leadless SMT technique(RoHS certificated),higher stability,longer life span
- Leadless SMT technique(RoHS certificated),smooth welding joint,firm connection of led and pcb

Technical Specification

Model	Barcode	W	PCB	G/M	Size	Color	Temp		
N1615D-TOP	9360338012184	10W	12mm	210g	16*15mm	WH	-20°C~+50°C	5m/roll	450*450*300mm

LED NEON LIGHT SERIES



3A-Neon-SB-1625D-WW/NW


White



Product Features

- Max Length 5m power from one end (Constant voltage version)
- Bending direction side bending (Horizontal bending)
- Constant current for longer run length are also available


Dimensions

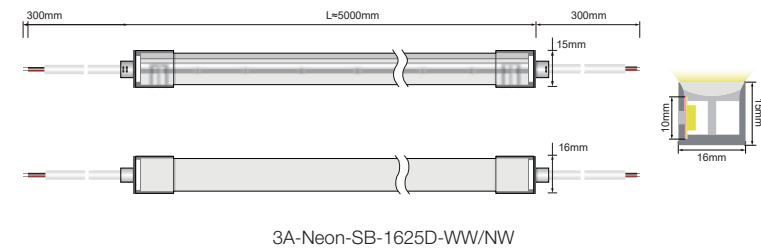


Technical Specification

Model	W	lm	Size	Color	CCT	Temp
3A-Neon-SB-1625D-WW/NW	10W	916lm/m@3000k, 968lm/m@4000k	W16*H15mm	WH	WW:3000K/ CW:4000K	-20°C~+50°C

Product application

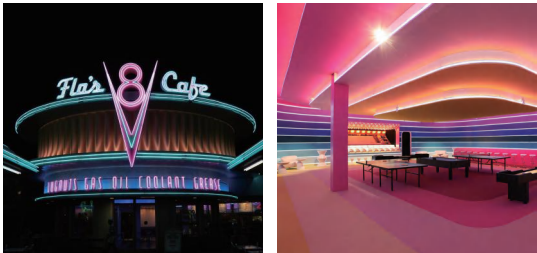

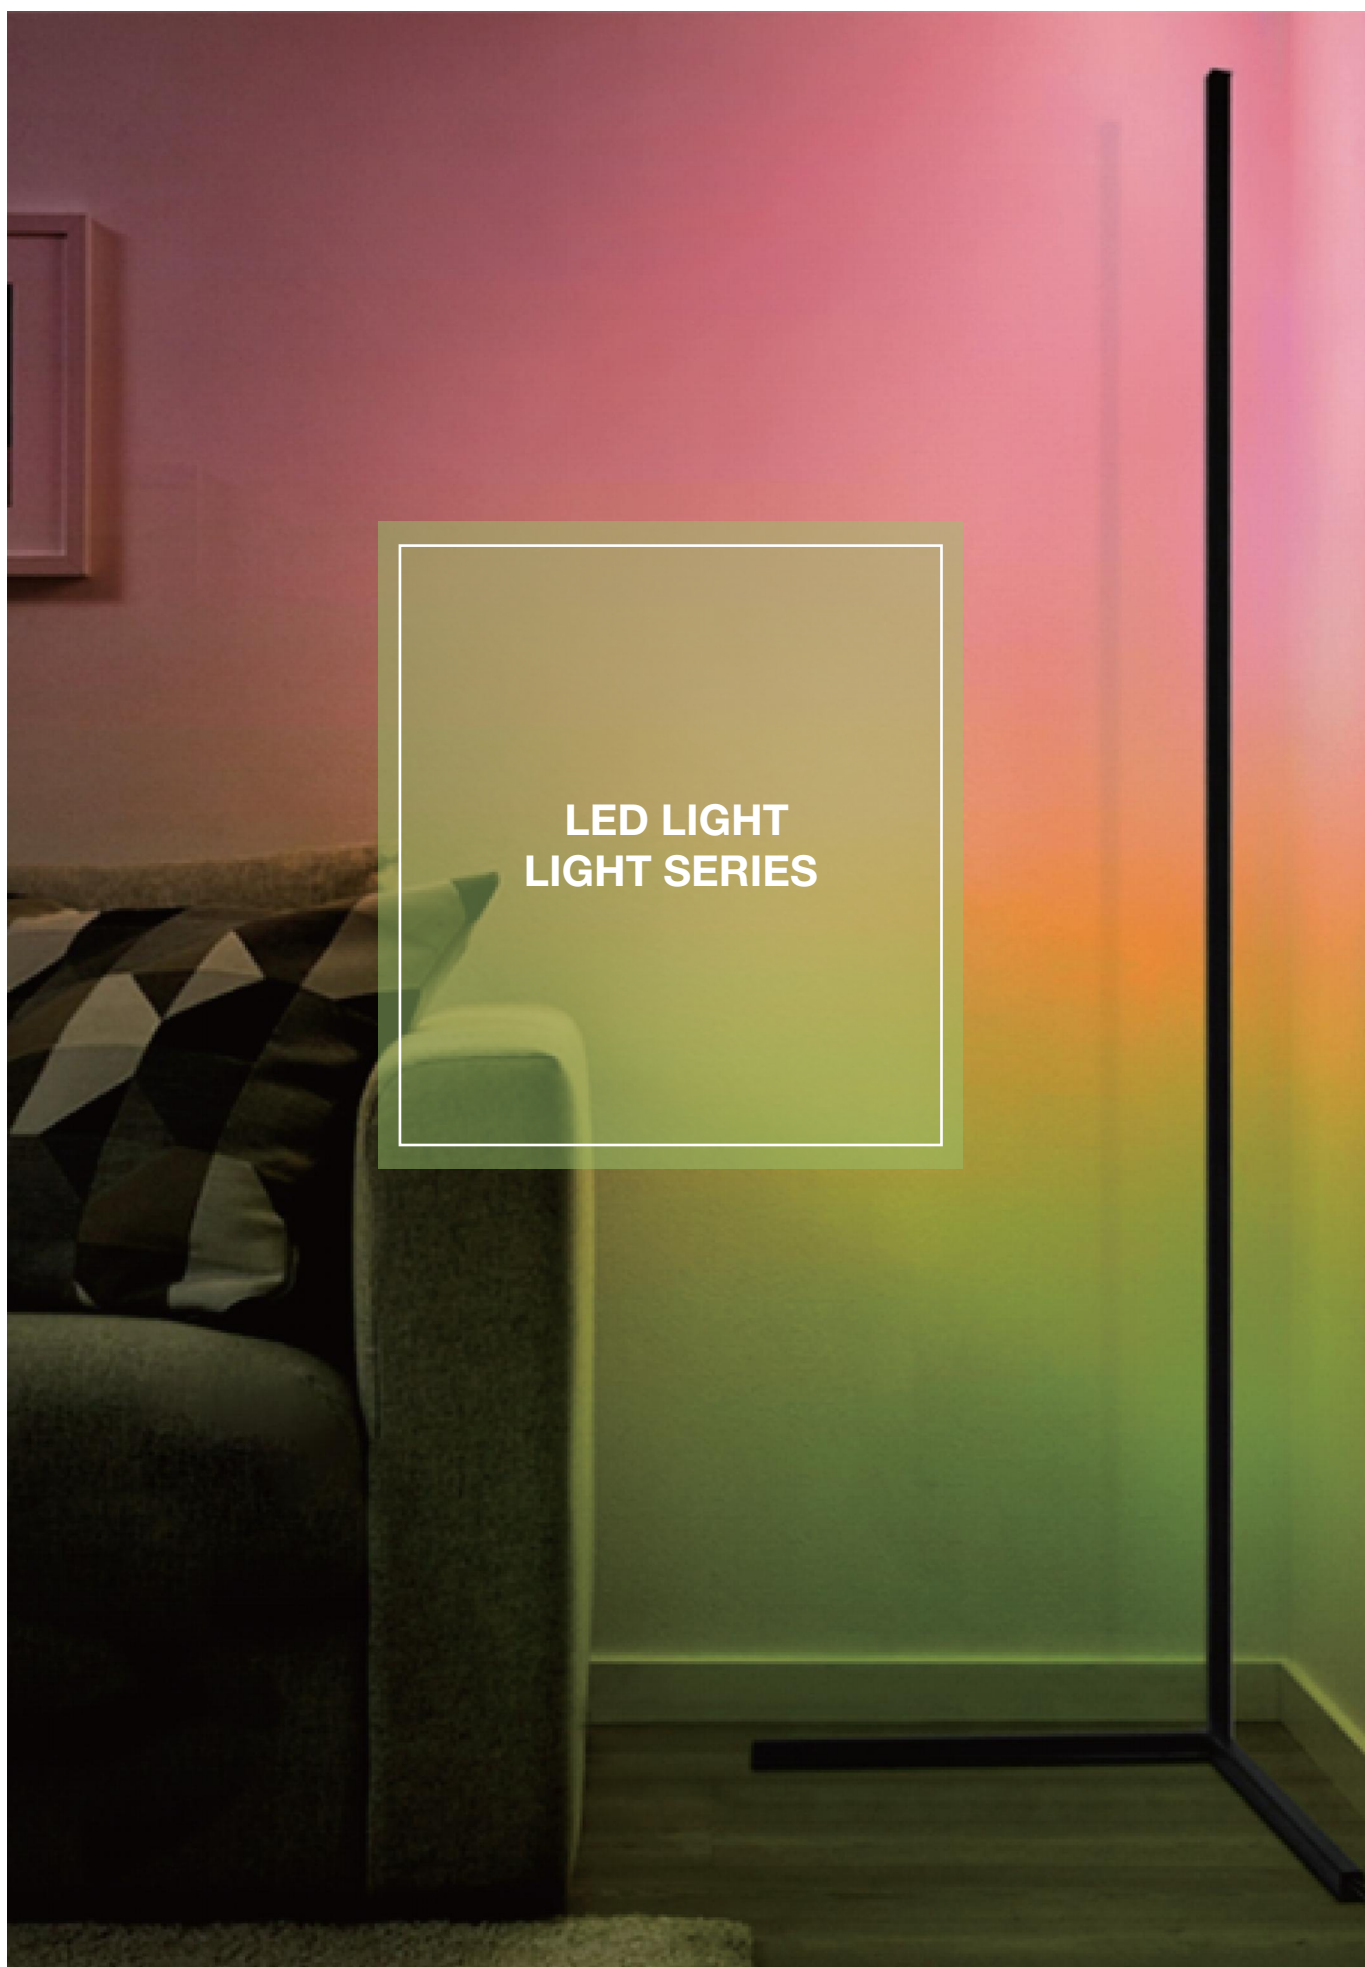

LED FLOOR LIGHT SERIES



FL35150




Black



Product Features


- Modern Design,NiteCore Extreme System
- Stepless color changing.300+ Color Mode Options
- RF remote control distance up to 30 meter
- Aluminum Pole,PMMA lamp shade
- Intelligent adjustment 300+ Options for your DIY selection

Dimensions

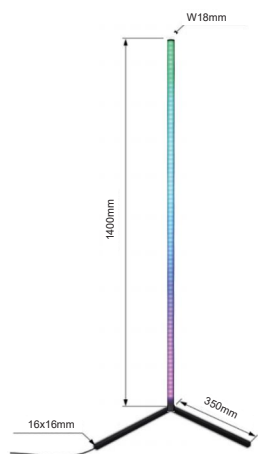

FL35150

RF REMOTE CONTROL

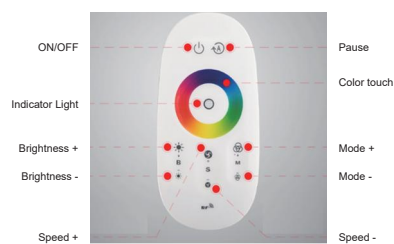

Technical Specification

Model	Barcode	W	Size	Color	Material	Beam Angle	Plug	Iron Base Size	Packing	Carton Size
FL35150	9360338002239	20W	H1400*W18mm	BK	Die-cat Aluminum	120°	2 metet	16*16mm+350mm	10 PCS/CTN	1465*245*375mm



LED HIGH BAY LIGHT SERIES




Black




Product Features (HB-A-VT-80W/120W/150W)

- CRI>70
- High efficiency 170lm~190lm/W
- Pre-installed Sensor Base with 0-10V dimming
- Made with LM-80 certified SMD LED chips
- With separate driver and Australian standard plug
- With 1M safety chain
- With PC reflector, Sensor and others for optional

Product Features (HB-A-VT-150W)

- CRI>90
- High efficiency 150lm/W
- Made with LM-80 certified SMD LED chips
- Waterproof IP65
- With separate driver and Australian standard plug
- With reflector and chain for optional


Dimensions

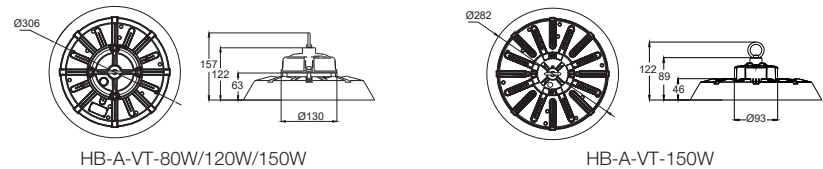

Technical Specification

Model	W	lm	Size	Color	Material		CCT		
HB-A-VT-80W	80W	15200lm±5%	306*122mm	BK	Aluminum	120°	5000K	1 PCS/CTN	336*336*150mm
HB-A-VT-120W	120W	21600lm±5%	306*122mm	BK	Aluminum	120°	5000K	1 PCS/CTN	336*336*150mm
HB-A-VT-150W	150W	25500lm±5%	306*122mm	BK	Aluminum	120°	5000K	1 PCS/CTN	336*336*150mm
HB-A-VT-150W	150W	22500lm±5%	282*89mm	BK	Aluminum	120°	5700K	1 PCS/CTN	336*336*150mm

Spare Parts

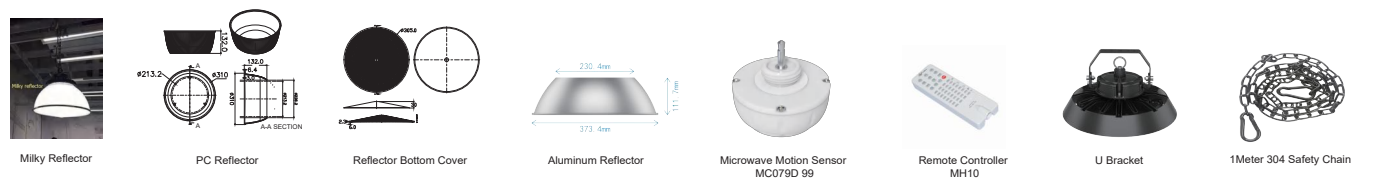

LED HIGH BAY LIGHT SERIES



A	B	C
50%		
	75%	
		100%

Wattage Adjust

KD007-BKTCTP




Black



Product Features

- Waterproof IP65
- Multipower:200W/150W/100W
- 3000K/4000K/5700K
- With 1.2 meter Australia Plug
- 5 Years Replacement Warranty
- Sensor Optional

Dimensions

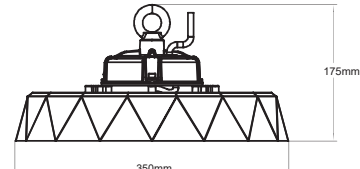

KD007-BKTCTP

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Package	Dimensions
KD007-BKTCTP	9360338007319	200W/150W/100W	140lm/W	Ø350*H175mm	BK	Aluminum	120°	3000K/4000K/5700K	1 PCS/CTN	370*370*145mm

Front Ring




Function



LED HIGH BAY LIGHT SERIES



Black




Product Features(KD007-BK6K150)

- Made with LM-80 SMD LED chips
- Waterproof IP65
- With a 1.2 meter Australia Plug
- With 1 meter chain
- 5 years warranty


Product Features(KD007-BK6K120)

- CRI>80
- IP65 waterproof
- THD<15%, PF>0.95
- Surface mounting installation
- High lumen efficiency up to 140lm/w
- Suitable for commercial lighting and industrial lighting areas

Dimensions



KD007-BK6K150



KD007-BK6K200L120

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Package	Dimensions
KD007-BK6K150	9360338007296	150W	140lm/W	D301*H175mm	BK	Die-cat Aluminum	90°	6000K	1 PCS/CTN	320*320*145mm
KD007-BK6K200	9360338007302	200W	140lm/W	Ø350*H175mm	BK	Die-cat Aluminum	90°	6000K	1 PCS/CTN	370*370*145mm
LA90111	754523212654	200W	140lm/W	Ø350*H170mm	BK	Die-cat Aluminum	90°	5000K	1 PCS/CTN	370*370*145mm

Front Ring



Function



Motion Sensor



PIR Sensor



Zigbee Controller



Tuya Controller

LED HIGH BAY LIGHT SERIES




Black



Product Features

- CRI>80
- IP65 waterproof
- THD<15%,PF>0.95
- Surface mounting installation
- High lumen efficiency up to 140lm/w
- Suitable for commercial lighting and industrial lighting areas

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
KD007-BK6K100L120	9360338007975	100W	140lm/W	Ø262*175mm	BK	Aluminum	120°	6000K	1 PCS/CTN	370*370*145mm

LED HIGH BAY LIGHT SERIES



Black




Product Features


- High efficiency 150lm/W
- Made with Dual color SMD LED chips
- Power and CCT adjustable
- Waterproof IP65
- With separatedriver and Australian standard plug
- Options: milky reflector aluminum reflector SUS304 chain, U-Bracket

Dual Color LEDs Lamp

- The half of LEDs chip CCT is 3000K, and another half is 6000K, when they are working together, the CCT will become 4000K after mixing.



Dimensions

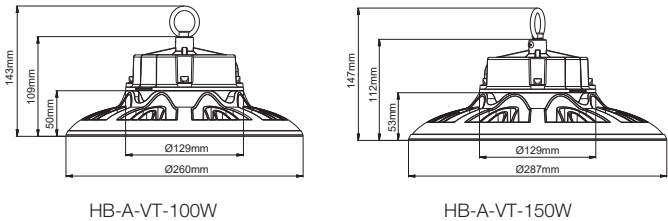

Technical Specification

Model	W	lm	Size	Color	Material		CCT		
HB-A-VT-100W	100W/80W/60W	15000lm/12400lm/9600lm	260*143mm	BK	Aluminum	120°	3000K&4000K&6000K	1 PCS/CTN	330*330*183mm
HB-A-VT-150W	150W/120W/100W	22500lm/18600lm/16000lm	287*147mm	BK	Aluminum	120°	3000K&4000K&6000K	1 PCS/CTN	327*327*187mm

Spare Parts



LED HIGH BAY LIGHT SERIES



Black




Product Features


- High efficiency 150lm/W
- Made with Dual color SMD LED chips
- Power and CCT adjustable
- Waterproof IP65
- With separatedriver and Australian standard plug
- Options: milky reflector aluminum reflector SUS304 chain, U-Bracket
- 0-10 v dimmable

Dual Color LEDs Lamp

- The half of LEDs chip CCT is 3000K, and another half is 6000K, when they are working together, the CCT will become 4000K after mixing.



Dimensions

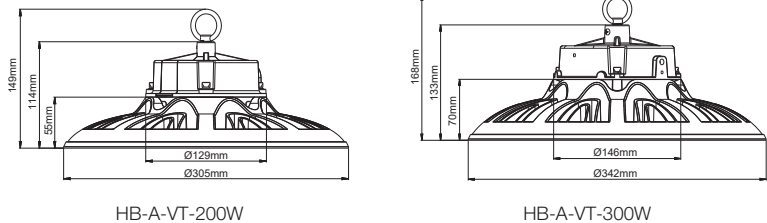

Technical Specification

Model	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
HB-A-VT-200W	200W/150W/100W	30000lm/23250lm/16000lm	305*149mm	BK	Aluminum	120°	3000K&4000K&6000K	1 PCS/CTN	345*345*188mm
HB-A-VT-300W	300W/240W/200W	45000lm/37200lm/32000lm	342*168mm	BK	Aluminum	120°	3000K&4000K&6000K	1 PCS/CTN	380*380*208mm

Spare Parts





**LED FLOOD
LIGHT SERIES**

LED FLOOD LIGHT SERIES



FL03-C-200W



FL03-C-500W



Black

AC
220-240V

CRI 80


SMD

IP66

Product Features

- High performance and reputable brand LED chips and driver, L70>100,000H
- Clear tempered glass decrease risk of lamp breaking for strong industrial applications
- Optimized aluminum alloy housing design for superior thermal management
- High mechanical impact resistance and ingress protection rating, IP66&IK08
- 1.5M AU cable and plug
- Compact in size and easy for transportation

Dimensions

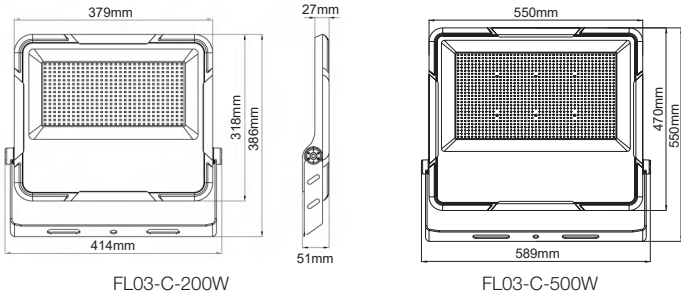

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
FL03-C-200W	/	200W/150W/100W	32254lm/26332lm/18093lm	414*386*51mm	BK	Aluminum	120°	3000K&4000K&5700K	5 PCS/CTN	478*380*455mm
FL03-C-BKTCTP500-300	9360338012269	200W/150W/100W	78673lm/65155lm/50728lm	550*589*56mm	BK	Aluminum	120°	3000K&4000K&5700K	3 PCS/CTN	650*170*625mm

LED FLOOD LIGHT SERIES




Black



Product Features

- Die-cast Aluminum body,frosted lens.
- Tri color,3000K/4000K/6500K
- Bridgelux LED,high lumen efficiency with 100lmW
- Perfect internal structure for stable performance
- Long life AVERAGE 50,000 hours
- IP65 Weatherproof;Robust body with IK08 rated
- 1.2M flex & plug fitted
- 3 years replacement warranty

Dimensions

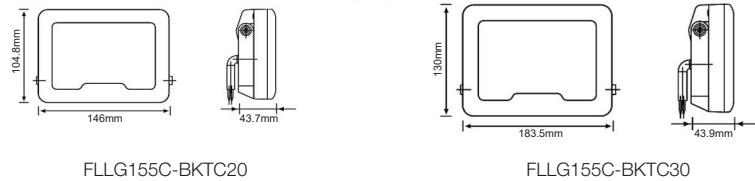

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
FLLG155C-BKTC20	9360338001737	20W	2000lm	146*43.7*104.8mm	BK	Die-cat Aluminum	3000K/4000/6500K	20 PCS/CTN	L1540*W480*H1550mm
FLLG155C-BKTC30	9360338001744	30W	3000lm	183.5*43.9*130mm	BK	Die-cat Aluminum	3000K/4000/6500K	18 PCS/CTN	L608*W221*H308mm

LED FLOOD LIGHT SERIES



Black

AC
200-240V

CRI 80


SMD

IP65

Product Features

- Die-cast Aluminum body,frosted lens.
- Tri color,3000K/4000K/6500K
- Bridgelux LED,high lumen efficiency with 100lmW
- Perfect internal structure for stable performance
- Long life AVERAGE 50,000 hours
- IP65 Weatherproof;Robust body with IK08 rated
- 1.2M flex & plug fitted
- 3 years replacement warranty

Dimensions

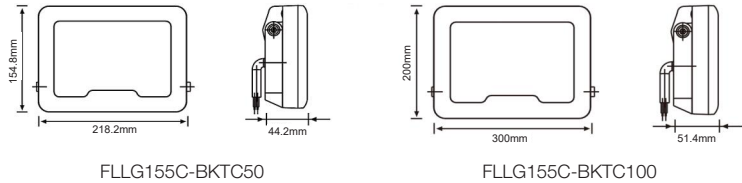


Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
FLLG155C-BKTC50	9360338001751	50W	5000lm	218.2*44.2*154.8mm	BK	Die-cat Aluminum	3000K/4000/6500K	12 PCS/CTN	L4680*W236*H308mm
FLLG155C-BKTC100	9360338001768	100W	10000lm	300*51.4*200mm	BK	Die-cat Aluminum	3000K/4000/6500K	6 PCS/CTN	L398*W324*H261mm

LED FLOOD LIGHT SERIES




 Black



Product Features


- Die-cast Aluminum body,tempered glass.
- High quality SMD LED CHIP
- Ultra thin design
- PIR Sensor
- 3 years replacement warranty

Dimensions

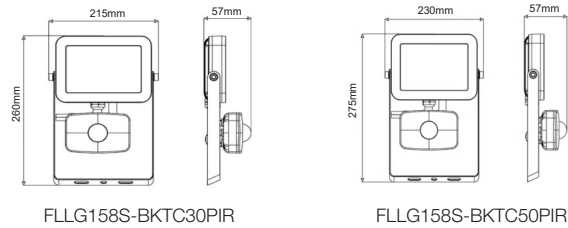

Technical Specification


Model	Barcode	W	lm	Size	Color	Material	CCT		
FLLG158S-BKTC30PIR	9360338001812	30W	2700lm	215*57*260mm	BK	Die-cat Aluminum	3000K-4000K-6500K	10 PCS/CTN	L460*W350*H290mm
FLLG158S-BKTC50PIR	9360338001829	50W	4500lm	230*57*275mm	BK	Die-cat Aluminum	5700K	10 PCS/CTN	L500*W350*H330mm

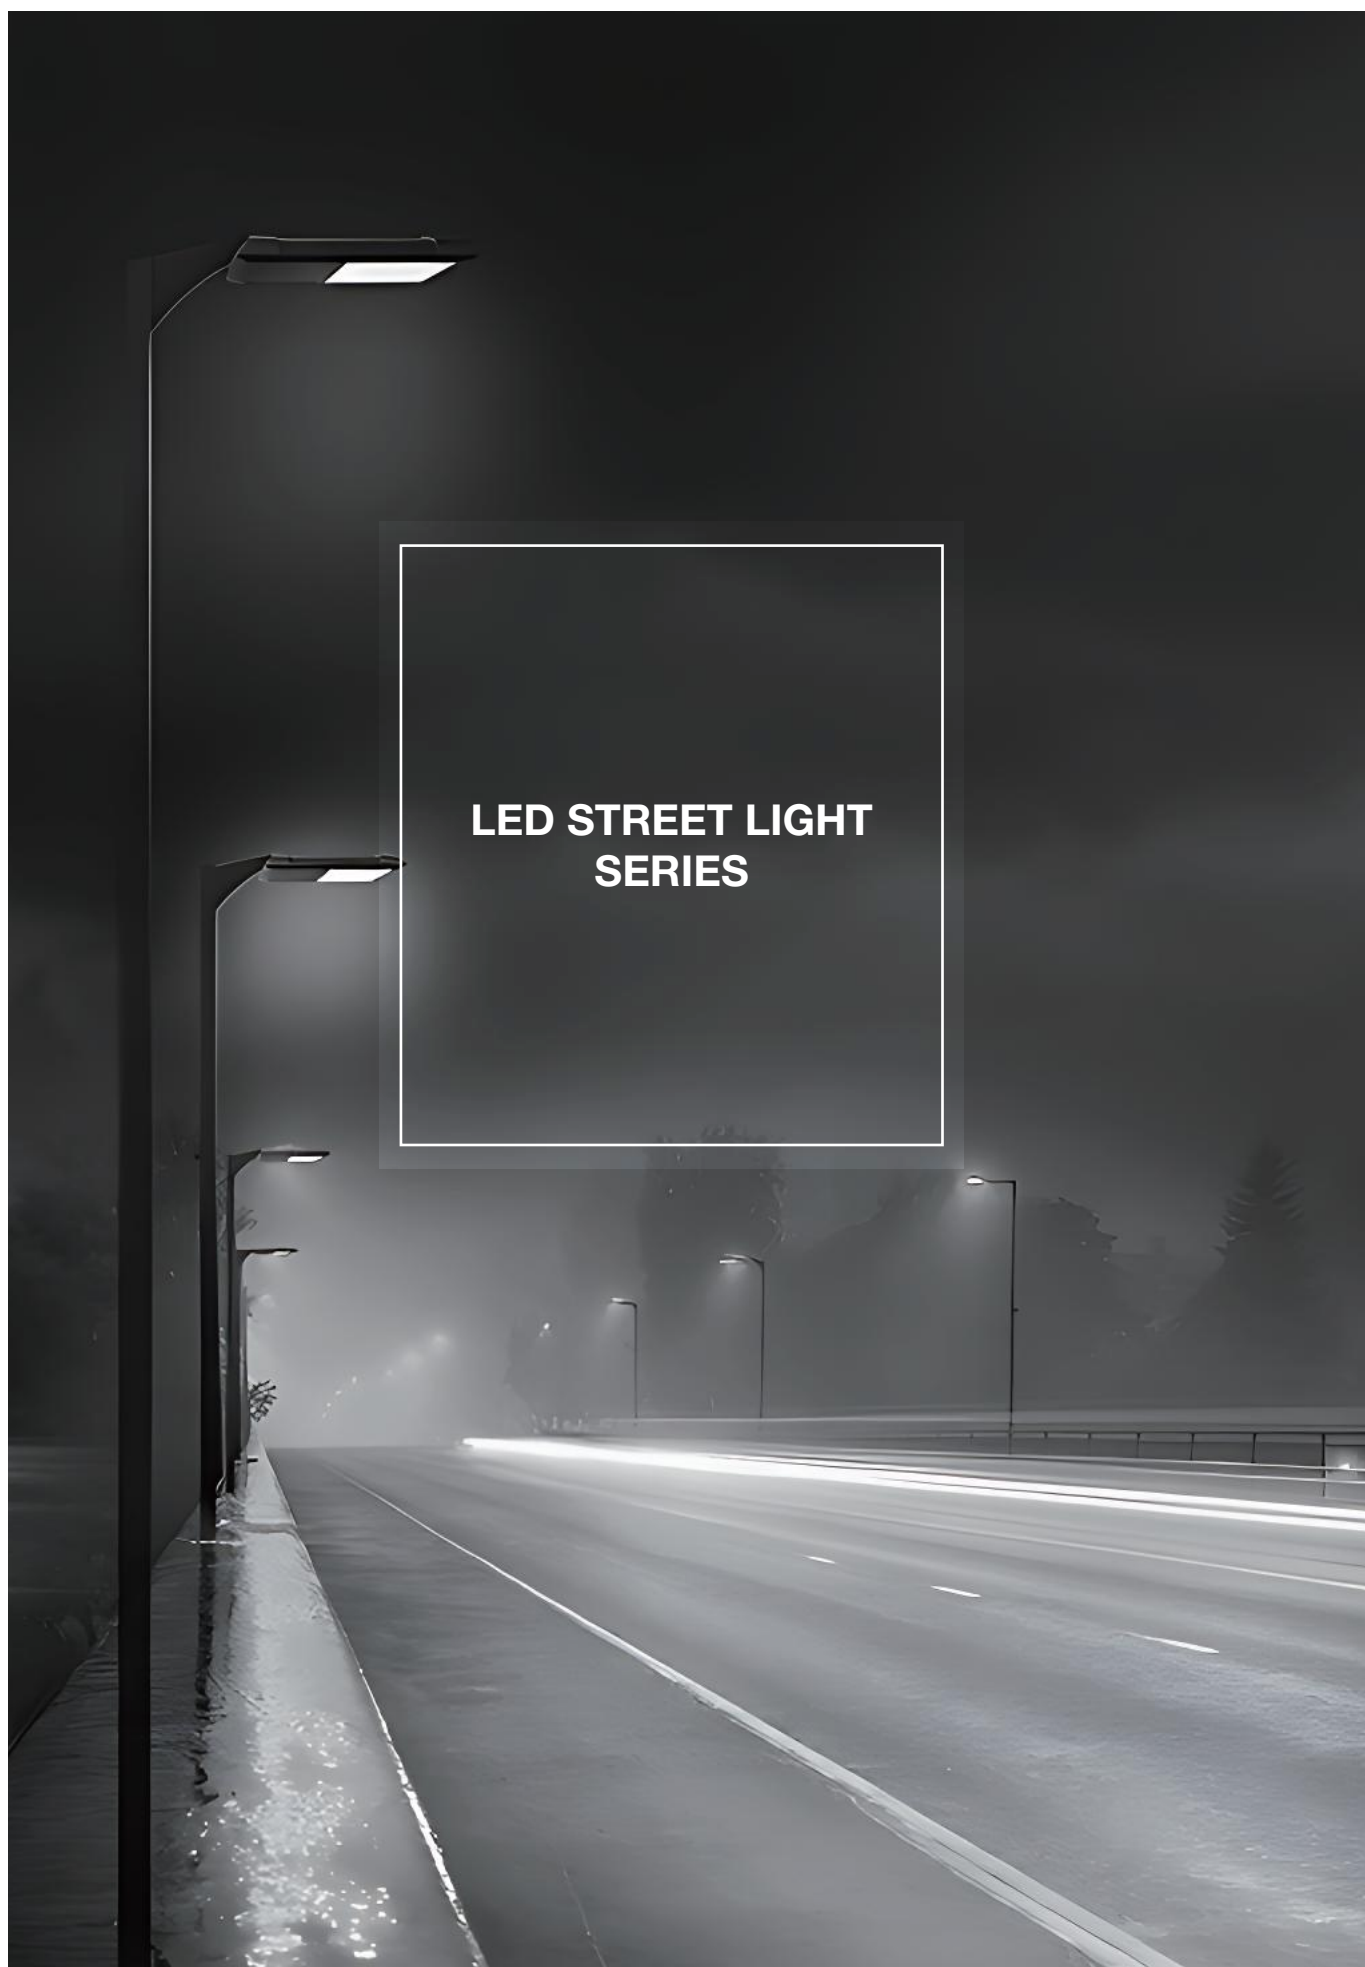

LED STREET LIGHT SERIES




Black



Product Features

- High performance and reputable brand LED chips and driver, L70>100,000H
- Clear tempered glass decrease risk of lamp breaking for strong industrial applications
- Optimized aluminum alloy housing design for superior thermal management
- High mechanical impact resistance and ingress protection rating, IP65&IK08
- Power Selectable: 100W-75W-50W
- CCT Switchable: 3000K-4000K-5700K
- Compact in size and easy for transportation
- Beam Angle: 140°x70°

Dimensions



SL-A-100W

Technical Specification

Model	Barcode	W	Size	Color	Material		CCT	lm		
SL-A-100W	9360338011217	100W	589*230*80mm	BK	Aluminum	140°x70°	3000K	11823	1 PCS/CTN	630*305*140mm
						140°x70°	4000K	13756	1 PCS/CTN	630*305*140mm
						140°x70°	5700K	12312	1 PCS/CTN	630*305*140mm
		75W	589*230*80mm	BK	Aluminum	140°x70°	3000K	10108	1 PCS/CTN	630*305*140mm
						140°x70°	4000K	11306	1 PCS/CTN	630*305*140mm
						140°x70°	5700K	10351	1 PCS/CTN	630*305*140mm
		50W	589*230*80mm	BK	Aluminum	140°x70°	3000K	7656	1 PCS/CTN	630*305*140mm
						140°x70°	4000K	8231	1 PCS/CTN	630*305*140mm
						140°x70°	5700K	7673	1 PCS/CTN	630*305*140mm




LED OUTDOOR LIGHT SERIES




Product Features

- Tempered Glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- GU10 2X35W max (Globes not included)

Dimensions



2122 & 2132

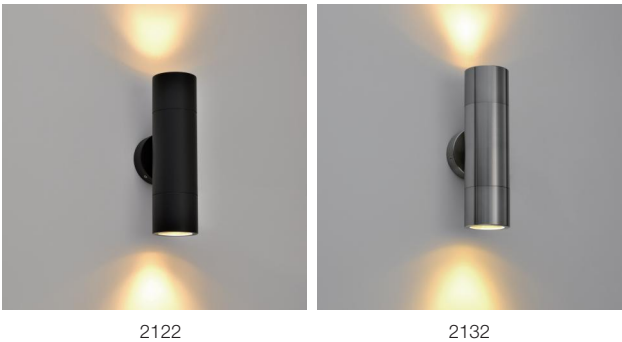

Technical Specification

Model	Barcode	W	Size	Color	Material		
2122-BK	9360338002789	MAX 2*35W	Ø60*H210mm	BK	Aluminum	20 PCS/CTN	470*420*H240mm
2122-TT	9360338002796	MAX 2*35W	Ø60*H210mm	TTM	Aluminum	20 PCS/CTN	470*420*H240mm
2122-MS	9360338008156	MAX 2*35W	Ø60*H210mm	Matt Silver	Aluminum	20 PCS/CTN	470*420*H240mm
2122-AS	9360338008163	MAX 2*35W	Ø60*H210mm	Anodised Silver	Aluminum	20 PCS/CTN	470*420*H240mm
2122-WH	9360338002802	MAX 2*35W	Ø60*H210mm	WH	Aluminum	20 PCS/CTN	470*420*H240mm
2132-SS	9360338002888	MAX 2*35W	Ø60*H210mm	Stainless steel	Stainless steel 316	20 PCS/CTN	470*420*H240mm

LED OUTDOOR LIGHT SERIES




Copper Rustic Brass Patina



Product Features

- Tempered Glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- GU10 2X35W max (Globes not included)


Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material		
2116-CP	9360338002741	MAX 2*35W	Ø60*H210mm	Copper	Copper	20 PCS/CTN	470*420*H240mm
2116-RB	9360338008279	MAX 2*35W	Ø60*H210mm	Rustic Brass	Rustic Brass	20 PCS/CTN	470*420*H240mm
2116-PTN	/	MAX 2*35W	Ø60*H210mm	Patina	Solid brass body	20 PCS/CTN	470*420*H240mm


LED OUTDOOR LIGHT SERIES

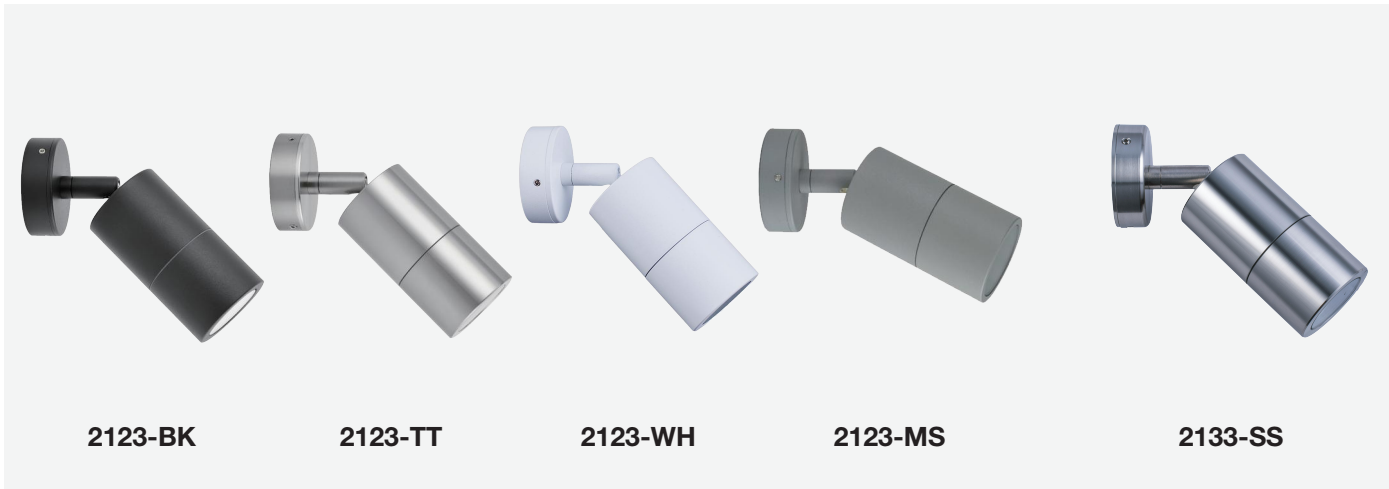

Product Features

- Tempered glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- Gu10 35W max (not included)

Dimensions

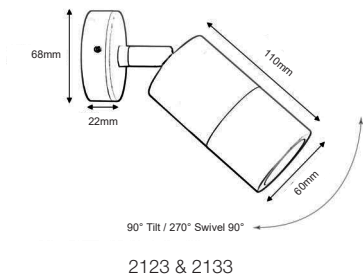

Technical Specification

Model	Barcode	W	Size	Color	Material		
2123-BK	9360338002819	35W	Ø60*85*H110mm	BK	Aluminum	20 PCS/CTN	335*420*H205mm
2123-TT	9360338002826	35W	Ø60*85*H110mm	Titanium	Aluminum	20 PCS/CTN	335*420*H205mm
2123-WH	9360338002833	35W	Ø60*85*H110mm	WH	Aluminum	20 PCS/CTN	335*420*H205mm
2123-MS	9360338008347	35W	Ø60*85*H110mm	Matt Silver	Aluminum	20 PCS/CTN	335*420*H205mm
2133-SS	9360338002895	35W	Ø60*80*H110mm	Stainless Steel	Stainless steel 316	20 PCS/CTN	335*420*H205mm


LED OUTDOOR LIGHT SERIES



Product Features

- Tempered glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- Gu10 35W max (not included)

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material		
2112-CP	9360338008354	35W	Ø60*80*H110mm	Copper	Copper	20 PCS/CTN	335*420*H205mm
2112-RB	9360338008361	35W	Ø60*80*H110mm	Rustic Brass	Rustic Brass	20 PCS/CTN	335*420*H205mm
2112-PTN	/	35W	Ø60*80*H110mm	Patina	Patina	20 PCS/CTN	335*420*H205mm


LED OUTDOOR LIGHT SERIES



Product Features

- Tempered glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- GU10 35W MAX (not included)

Dimensions



2121 & 2131 & 2114

Technical Specification

Model	Barcode	W	Size	Color	Material		
2121-BK	9360338002758	35W	Ø60*85*H110mm	BK	Aluminum	20 PCS/CTN	310*440*H210mm
2121-TT	9360338002765	35W	Ø60*85*H110mm	TITANIUM	Aluminum	20 PCS/CTN	310*440*H210mm
2121-WH	9360338002772	35W	Ø60*85*H110mm	WH	Aluminum	20 PCS/CTN	310*440*H210mm
2121-MS	9360338008309	35W	Ø60*85*H110mm	Matt Silver	Aluminum	20 PCS/CTN	310*440*H210mm
2131-SS	9360338002871	35W	Ø60*85*H110mm	STAINLESS STEEL	Stainless steel 316	20 PCS/CTN	310*440*H210mm
2114-CP	9360338002734	35W	Ø60*85*H110mm	Copper	Copper	20 PCS/CTN	310*440*H210mm


LED OUTDOOR LIGHT SERIES



Product Features

- Tempered Glass diffuser
- IP rating :IP44
- Input 240V 50Hz
- GU10 1 Or 2X35W max (Globes not included)

Dimensions

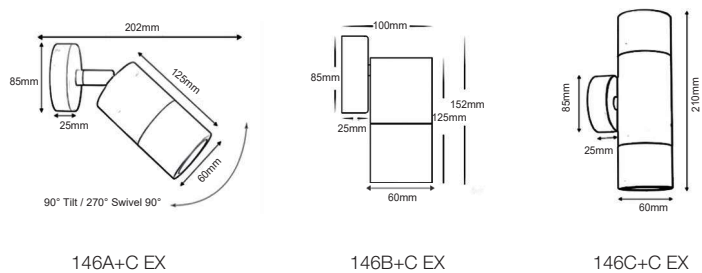

Technical Specification

Model	Barcode	W	Size	Color	Material		
146A+C-SSGUEX	9360338003663	MAX 35W	Ø60*85*H152mm	Stainless steel	Stainless steel	12 PCS/CTN	440*410*H250mm
146A+C-WHGUEx	9360338011590	MAX 35W	Ø60*85*H152mm	White	Stainless steel	12 PCS/CTN	440*410*H250mm
146A+C-BKGUEX	9360338003663	MAX 35W	Ø60*85*H152mm	Black	Stainless steel	12 PCS/CTN	440*410*H250mm
146B+C-SSGUEX	9360338003687	MAX 35W	Ø60*85*H152mm	Stainless steel	Stainless steel	12 PCS/CTN	440*410*H250mm
146B+C-WHGUEx	9360338011606	MAX 35W	Ø60*85*H152mm	White	Stainless steel	12 PCS/CTN	440*410*H250mm
146B+C-BKGUEX	9360338011613	MAX 35W	Ø60*85*H152mm	Black	Stainless steel	12 PCS/CTN	440*410*H250mm
146C+C-SSGUEX	9360338003700	MAX 2*35W	Ø60*85*H210mm	Stainless steel	Stainless steel	20 PCS/CTN	675*240*H440mm
146C+C-WHGUEx	9360338011620	MAX 2*35W	Ø60*85*H210mm	White	Stainless steel	20 PCS/CTN	675*240*H440mm
146C+C-BKGUEX	9360338011637	MAX 2*35W	Ø60*85*H210mm	Black	Stainless steel	20 PCS/CTN	675*240*H440mm


LED OUTDOOR LIGHT SERIES



Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP44 & IK02
- Die-cast Aluminium with SS/RAL 9003/9004 Matt

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material	
146B+C-SSGUSEN	9360338003694	MAX 7W	108*69*H150mm	SS	Die-cast Aluminium	20 PCS/CTN
146B+C-WHGUSEN	9360338011644	MAX 7W	108*69*H150mm	WH	Die-cast Aluminium	20 PCS/CTN
146B+C-BKGUSEN	9360338011651	MAX 7W	108*69*H150mm	BK	Die-cast Aluminium	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



 White  Black  Stainless steel










Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP44 & IK02
- Die-cast Aluminium with SS/RAL 9003/9004 Matt

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material	
146C+C-SSGUSEN	9360338003717	MAX 2*7W	108*68*H212mm	SS	Die-cast Aluminium	20 PCS/CTN
146C+C-WHGUSEN	9360338007593	MAX 2*7W	108*68*H212mm	WH	Die-cast Aluminium	20 PCS/CTN
146C+C-BKGUSEN	9360338007586	MAX 2*7W	108*68*H212mm	BK	Die-cast Aluminium	20 PCS/CTN


LED OUTDOOR LIGHT SERIES




Product Features

- Aluminum body
- Tempered glass diffuser
- IP rating :IP 54
- Input 240V 50Hz
- Gu10 (not included)


Dimensions



2142



2143

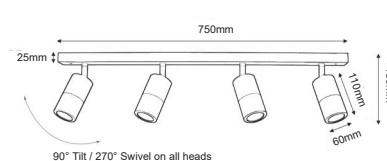

2144

Technical Specification

Model	Barcode	W	Size	Color	Material		
2142-BK	9360338002901	MAX 2*35W	Ø60*350*H180mm	BK	Aluminum	10 PCS/CTN	420*430*H380mm
2142-TT	9360338002925	MAX 2*35W	Ø60*350*H180mm	Titanium	Aluminum	10 PCS/CTN	420*430*H380mm
2142-WH	9360338002918	MAX 2*35W	Ø60*350*H180mm	WH	Aluminum	10 PCS/CTN	420*430*H380mm
2143-BK	9360338002932	MAX 3*35W	Ø60*550*H180mm	BK	Aluminum	10 PCS/CTN	420*420*H600mm
2143-TT	9360338002956	MAX 3*35W	Ø60*550*H180mm	Titanium	Aluminum	10 PCS/CTN	420*420*H600mm
2143-WH	9360338002949	MAX 3*35W	Ø60*550*H180mm	WH	Aluminum	10 PCS/CTN	420*420*H600mm
2144-BK	9360338002963	MAX 4*35W	Ø60*750*H180mm	BK	Aluminum	10 PCS/CTN	420*420*H800mm
2144-TT	9360338002987	MAX 4*35W	Ø60*750*H180mm	Titanium	Aluminum	10 PCS/CTN	420*420*H800mm
2144-WH	9360338002970	MAX 4*35W	Ø60*750*H180mm	WH	Aluminum	10 PCS/CTN	420*420*H800mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body
- Tempered glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- Gu10 2X35W max (not included)

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material		
2124-BK	9360338002840	MAX 2*35W	100*140*175	BK	Aluminum	10 PCS/CTN	210*640*H260mm
2124-TT	9360338002864	MAX 2*35W	100*140*175	Titanium	Aluminum	10 PCS/CTN	210*640*H260mm
2124-WH	9360338002857	MAX 2*35W	100*140*175	WH	Aluminum	10 PCS/CTN	210*640*H260mm

LED OUTDOOR LIGHT SERIES



2134-SS




Stainless steel



Product Features

- 316 Stainless steel body
- Tempered glass diffuser
- 240V AC 50HZ
- 2*GU10 35W MAX
- IP65

Dimensions



2134-SS

Technical Specification

Model	Barcode	W	Size	Color	Material	
2134-SS	9360338008422	2*35W	100*160*180 mm	Stainless steel	316 Stainless steel body	10 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminium body
- Tempered glass diffuser
- 240V AC 50HZ
- 4*GU10 35W MAX
- IP54

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material		
2150-BK	9360338002994	4*GU10,35W MAX	250*250*H182mm	BK	Aluminum body	10 PCS/CTN	580*240*H400mm
2150-TT	9360338003014	4*GU10,35W MAX	250*250*H182mm	TTM	Aluminum body	10 PCS/CTN	580*240*H400mm
2150-WH	9360338003007	4*GU10,35W MAX	250*250*H182mm	WH	Aluminum body	10 PCS/CTN	580*240*H400mm



LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body, BK/WH/TITANIUM available
- Tempered glass diffuser
- IP rating : IP65
- Input AC240V 1 Or 2*8W LED
- CCT 3K/4K/5K
- No Sensor

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material	CCT		
251-BK	9360338003724	8W	Ø55*90*H110mm	BK	Aluminum	3000K/4000K/5000K	20 PCS/CTN	530*280*H285mm
251-WH	9360338003755	8W	Ø55*90*H110mm	WH	Aluminum	3000K/4000K/5000K	20 PCS/CTN	530*280*H285mm
251-TT	9360338007937	8W	Ø55*90*H110mm	Titanium	Aluminum	3000K/4000K/5000K	20 PCS/CTN	530*280*H285mm
252-BK	9360338003731	2*8W	Ø55*130*H100mm	BK	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm
252-WH	9360338003762	2*8W	Ø55*130*H100mm	WH	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm
252-TT	9360338007944	2*8W	Ø55*130*H100mm	Titanium	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm


LED OUTDOOR LIGHT SERIES



Product Features

- PIR sensor;
- Aluminum body, BK/WH/TITANIUM available
- Tempered glass diffuser
- IP rating : IP65
- Input AC240V 1 Or 2*8W LED
- CCT 3K/4K/5K

Dimensions



253

Technical Specification

Model	Barcode	W	Size	Color	Material	CCT		
253-BK	9360338003748	2*8W	Ø55*130*H100mm	BK	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm
253-WH	9360338003779	2*8W	Ø55*130*H100mm	WH	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm
253-TT	9360338007951	2*8W	Ø55*130*H100mm	TITANIUM	Aluminum	3000K/4000K/5000K	20 PCS/CTN	670*320*H290mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminium/Brass body
- 240V AC 50HZ
- GU10 35W MAX
- Easy installation
- 3 years warranty

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material	
ST151-BK	9360338009627	35W	110*90*175 mm	Black	Aluminium / Brass body	20 PCS or 10 PCS/CTN
ST151-WH	9360338009658	35W	110*90*175 mm	White	Aluminium / Brass body	20 PCS or 10 PCS/CTN
ST151-TT	9360338009689	35W	110*90*175 mm	Titanium	Aluminium / Brass body	20 PCS or 10 PCS/CTN
ST151-AB	9360338009719	35W	110*90*175 mm	Aged Brass	Aluminium / Brass body	20 PCS or 10 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Reno Double Adj Wall Spot Light
- Aluminium / Brass body
- Tempered glass diffuser
- 240V AC 50HZ
- 2×GU10, 35W MAX
- IP65

Dimensions



ST152

Technical Specification

Model	Barcode	W	Size	Color	Material	
ST152-BK	9360338009634	2*35W	100*130*H175 mm	Black	Aluminium / Brass body	10 PCS/CTN
ST152-WH	9360338009665	2*35W	100*130*H175 mm	White	Aluminium / Brass body	10 PCS/CTN
ST152-TT	9360338009696	2*35W	100*130*H175 mm	Titanium	Aluminium / Brass body	10 PCS/CTN
ST152-AB	9360338009726	2*35W	100*130*H175 mm	Aged Brass	Aluminium / Brass body	10 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Reno Double Adj Wall Spot Light With Sensor
- Aluminium / Brass body
- Tempered glass diffuser
- With override function
- AC 220-240V 50Hz
- 2×GU10, 35W MAX
- IP65

Dimensions

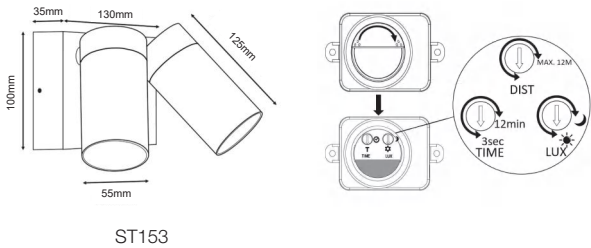

Technical Specification

Model	Barcode	W	Size	Color	Material	
ST153-BK	9360338009641	2*35W	100*130*H175 mm	Black	Aluminium / Brass body	10 PCS/CTN
ST153-WH	9360338009672	2*35W	100*130*H175 mm	White	Aluminium / Brass body	10 PCS/CTN
ST153-TT	9360338009702	2*35W	100*130*H175 mm	Titanium	Aluminium / Brass body	10 PCS/CTN
ST153-AB	9360338009733	2*35W	100*130*H175 mm	Aged Brass	Aluminium / Brass body	10 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminium body
- 240V AC 50HZ
- GU10 3*35W MAX
- Easy installation
- 3 years warranty

Dimensions



Technical Specification

Model	Barcode	W	Size	Color	Material	
ST2153-BK	9360338008668	3*35W	Ø240*188mm	Black	Aluminium	4 PCS/CTN
ST2153-WH	9360338008682	3*35W	Ø240*188mm	White	Aluminium	4 PCS/CTN

LED OUTDOOR LIGHT SERIES




Black



Product Features

- 2LT Fixed Pliiar Wall Spot Light
- Aluminium body
- Tempered glass diffuser
- 2×GU10 35W MAX
- IP65

Dimensions



21191-BK

Technical Specification

Model	Barcode	W	Size	Color	Material	
21191-BK	9360338010012	2*35W	105*103*H300 mm	Black	Aluminium	10 PCS/CTN

LED OUTDOOR LIGHT SERIES




Black



Product Features

- 4LT Fixed Pliar Wall Spot Light
- Aluminium body
- Tempered glass diffuser
- 4×GU10 35W MAX
- IP65

Dimensions



21192-BK

Technical Specification

Model	Barcode	W	Size	Color	Material	
21192-BK	9360338010029	4*35W	155*103*H300 mm	Black	Aluminium	4 PCS/CTN

LED OUTDOOR LIGHT SERIES




Black



Product Features

- CCT Switchable: 3000K-4500K-6000K
- IP65

Dimensions

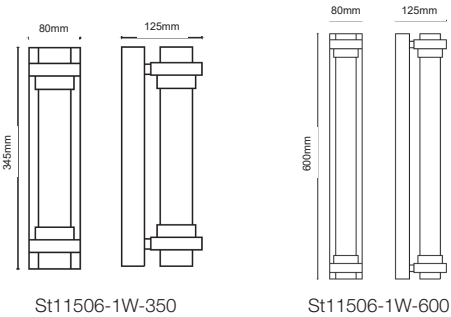

St11506-1W-350



St11506-1W-600

Technical Specification

Model	W	LED Chip	Size	Color	CCT	Temp	N.W
St11506-1W-350	12W	San'an 1W	D80*W125*H345mm	BK	3000K/4500K/6000K	-20°C~+45°C	2.185 kg
St11506-1W-600	16W	San'an 1W	D80*W125*H600mm	BK	3000K/4500K/6000K	-20°C~+45°C	3.5 kg

LED OUTDOOR LIGHT SERIES





Black



AC
220-240V



CRI 80



IP65



3000K
4500K
6000K




3
years

Product Features

- CCT Switchable: 3000K-4500K-6000K
- IP65

Dimensions

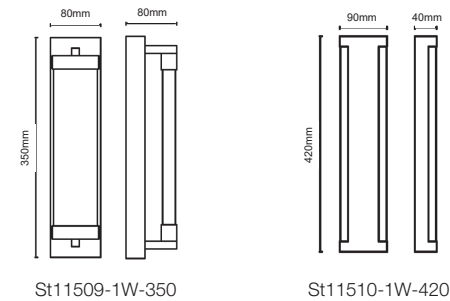

St11509-1W-350

St11510-1W-420

Technical Specification

Model	W	LED Chip	Size	Color	CCT	Temp	N.W
St11509-1W-350	12W	San'an 1W	D80*W80*H350mm	BK	3000K/4500K/6000K	-20°C~+45°C	1.665 kg
St11510-1W-420	10W	San'an 0.5W	D90*W40*H420mm	BK	3000K/4500K/6000K	-20°C~+45°C	1.615 kg

LED OUTDOOR LIGHT SERIES



White Black Titanium

Stainless steel


Copper



Product Features

- Tempered glass diffuser
- IP rating :IP 65
- Input 12V
- MR16 20W MAX (Globes not included)

Dimensions



3121 & 3311 & 3222

Technical Specification

Model	Barcode	W	Size	Color	Material		
3121-BK12V	9360338003496	20W	Ø60*H410mm	BK	Aluminum	20 PCS/CTN	310*440*H210mm
3121-TT12V	9360338003502	20W	Ø60*H410mm	TITANIUM	Aluminum	20 PCS/CTN	310*440*H210mm
3121-WH12V	9360338008477	20W	Ø60*H410mm	White	Aluminum	20 PCS/CTN	310*440*H210mm
3311-SS12V	9360338003526	20W	Ø60*H410mm	STAINLESS STEEL	Stainless steel 316	20 PCS/CTN	310*440*H210mm
3222-CP12V	9360338003519	20W	Ø60*H410mm	Copper	Copper	20 PCS/CTN	310*440*H210mm

LED OUTDOOR LIGHT SERIES



Black



Stainless steel



Black



Stainless steel



DC 12V



IP65



3000K/4000K/5000K




3 years

Product Features

- Aluminum Or Stainless steel 316 body
- Tempered Glass Diffusor
- IP rating :IP 65
- Input DC12V
- MR16 1 or 2X20W Max(Globes not included)

Dimensions

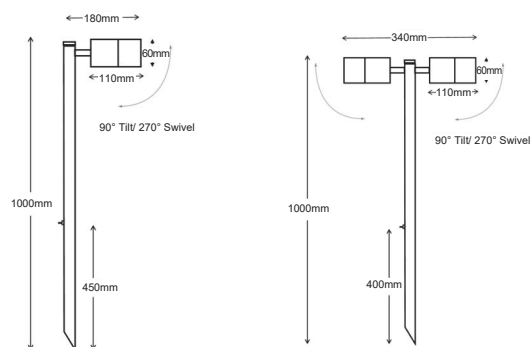


3131-BK12V & 3312-SS12V

3132-BK12V & 3313-SS12V

Technical Specification

Model	Barcode	W	Size	Color	Material	CCT		
3131-BK12V	9360338003533	MAX 1*20W	Ø60*180*H1000mm	BK	Aluminum body	3000K/4000K/5000K	10 PCS/CTN	375*220*H1040mm
3312-SS12V	9360338003557	MAX 1*20W	Ø60*180*H1000mm	Stainless steel	stainless steel 316 body	3000K/4000K/5000K	10 PCS/CTN	375*220*H1040mm
3132-BK12V	9360338003540	MAX 2*20W	Ø60*340*H1000mm	BK	Aluminum body	3000K/4000K/5000K	10 PCS/CTN	480*380*H1040mm
3313-SS12V	9360338003564	MAX 2*20W	Ø60*340*H1000mm	Stainless steel	stainless steel 316 body	3000K/4000K/5000K	10 PCS/CTN	480*380*H1040mm

LED OUTDOOR LIGHT SERIES

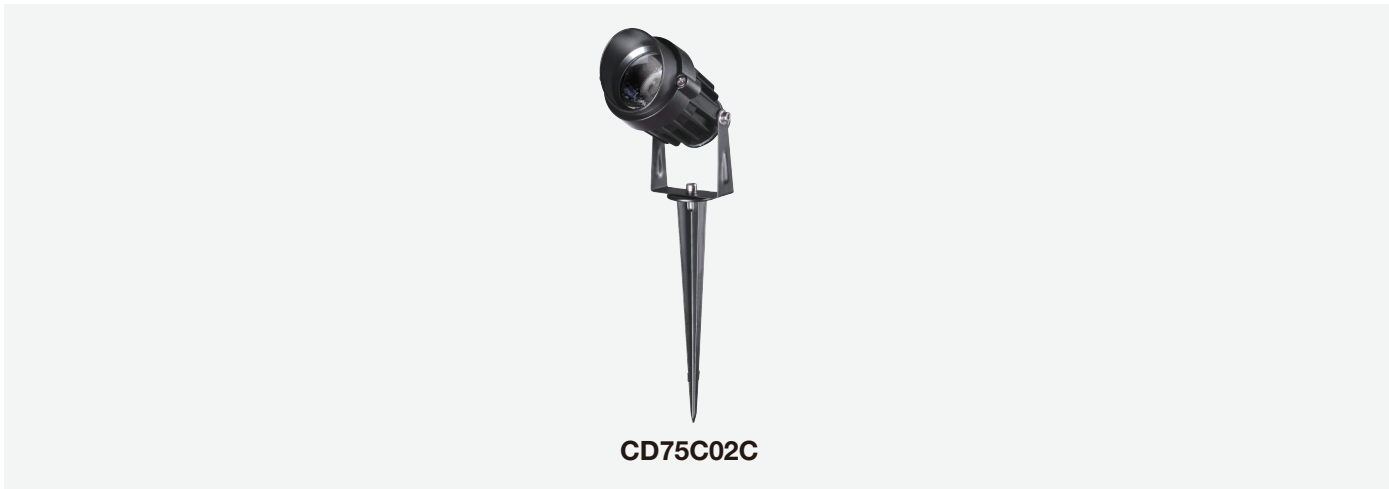


 Black



Product Features

- Die-cast aluminium construction
- Made with LM-80 certified
- Water proof IP65
- Anti-corrosive,dustproof
- 3 Years Warranty
- With 1. 5m cable
- Unique model design, super robust and stylish, light head adjustable

Dimensions

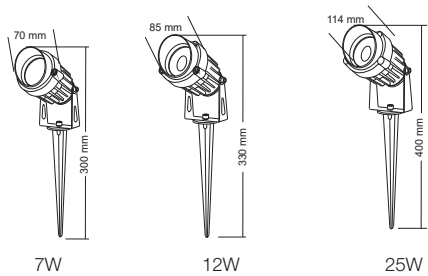

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
CD75C02C-BK3K7C01	9360338003618	7W	340lm	Ø70*H300mm	BK	Aluminum	30°	3000K	20 PCS/CTN	445*185*360mm
CD75C02C-BK4K7C01	9360338009030	7W	340lm	Ø70*H300mm	BK	Aluminum	30°	4000K	20 PCS/CTN	445*185*360mm
CD75C02C-BK5K7C01	9360338003625	7W	340lm	Ø70*H300mm	BK	Aluminum	30°	5500K	20 PCS/CTN	445*185*360mm
CD75C02C-BK3K12C01	9360338003632	12W	970lm	Ø85*H330mm	BK	Aluminum	30°	3000K	50 PCS/CTN	445*445*370mm
CD75C02C-BK3K25C01	9360338003649	25W	1700lm	Ø114*H400mm	BK	Aluminum	30°	3000K	20 PCS/CTN	520*220*440mm

LED OUTDOOR LIGHT SERIES






Black



Product Features

- IP65 Rating.
- Anti-corrosive
- Waterproof, dustproof.
- Unique model design, super robust and stylish, light head adjustable
- For outdoor, lawn, outer wall, parterre, garden, villas, hotels, etc.

Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT		
CD3502-BK3K3C01	9360338008996	3W	139.8lm	Ø40*250 mm	BK	Aluminum+PMMA+Glass	30°	3000K	30 PCS/CTN	345*215*360mm
CD3502-BK4K3C01	9360338009108	3W	139.8lm	Ø40*250 mm	BK	Aluminum+PMMA+Glass	30°	4000K	30 PCS/CTN	345*215*360mm
CD3502-BK5K3C01	9360338009009	3W	139.8lm	Ø40*250 mm	BK	Aluminum+PMMA+Glass	30°	5000K	30 PCS/CTN	345*215*360mm

LED OUTDOOR LIGHT SERIES



 Black



DC 12V






Product Features

- Alumiium body garden spike
- DC 12V
- Water proof IP54
- G4 lamp

Dimensions

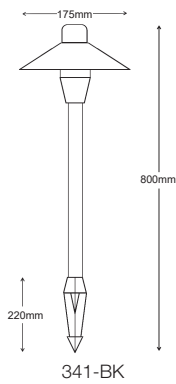

Technical Specification

Model	Barcode	W	Size	Color	Material		
341-BK	9360338003571	MAX 1*20W	Ø175*H800mm	BK	Aluminium	10 PCS/CTN	430*470*H1020mm

LED OUTDOOR LIGHT SERIES



 Black



AC
220-240V

CRI 90

SMD

IP65

CE


RoHS



Product Features

- Quality black powder coat finish with robust polycarbonate diffuser
- Special IP66 terminal block,excellent waterproof guarantee, easy installation and testing
- Easy selectable colour temperature with a DIP switch 3000K,4000K,6000K
- High efficiency SMD LED chips,CRI>90
- 100 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver
- Surface mounted

Dimensions




F35002/1

Technical Specification

Model	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
F35002/1	10W	420lm	Ø150*500mm	BK	Aluminum	100°	3000K/4000K/6000K	4 PCS/CTN	425*455*575mm

LED OUTDOOR LIGHT SERIES

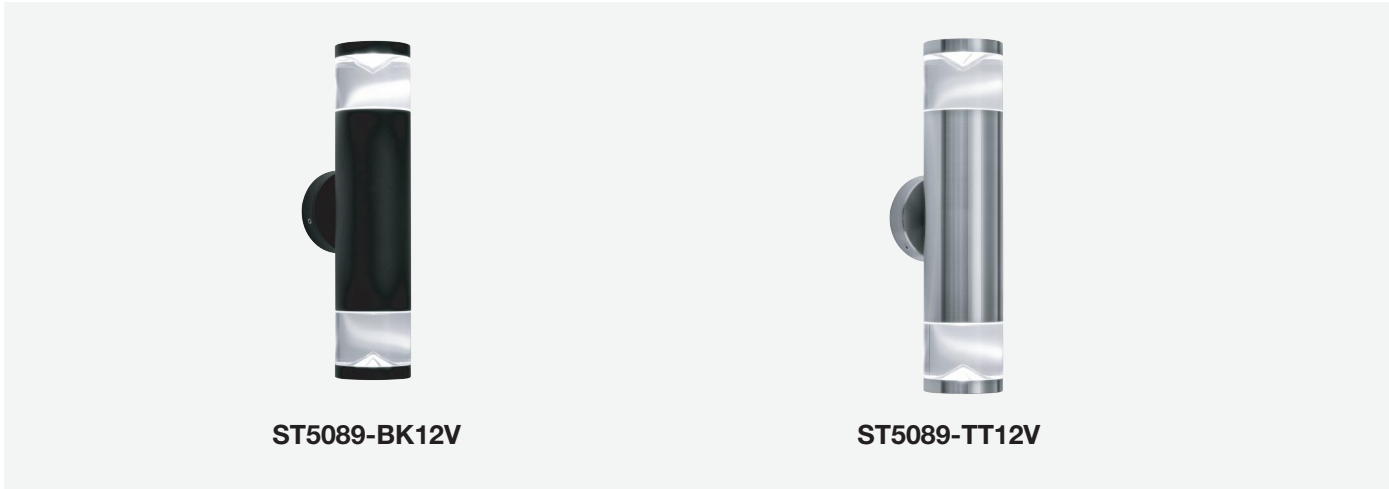




BlackTitanium




AC 240VIP653 years

Product Features

- Aluminum body
- High grade perspex reflector lens
- IP rating :IP 65
- Input 240V 50Hz
- 2XGU10 35W Max(Globes not included)

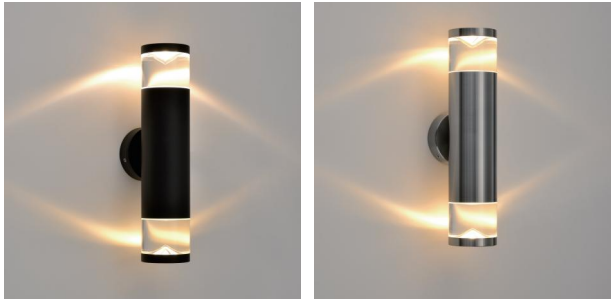

Dimensions

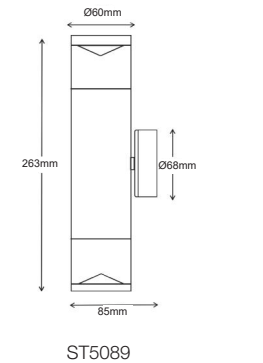

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST5089-BK12V	9360338004332	MAX 2*35W	Ø60*85*H263mm	BK	Aluminum	10 PCS/CTN	455*210*H290mm
ST5089-TT12V	9360338004349	MAX 2*35W	Ø60*85*H263mm	Titanium	Aluminum	10 PCS/CTN	455*210*H290mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body
- High grade perspex reflector lens
- IP rating :IP 65
- Input DC 12V
- 1XMR16 20W Max(Globes not included)

Dimensions

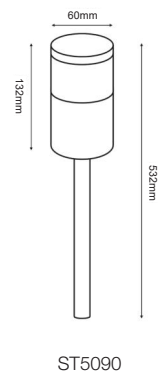

Technical Specification

Model	Barcode	W	Size	Spike Length	Color	Material		
ST5090-BK12V	9360338004356	MAX 1*20W	Ø60*60*H532mm	400mm	BK	Aluminum	10 PCS/CTN	380*160*H570mm
ST5090-TT12V	9360338004363	MAX 1*20W	Ø60*60*H532mm	400mm	Titanium	Aluminum	10 PCS/CTN	380*160*H570mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body
- High grade perspex reflector lens
- IP rating :IP 65
- Input 240V 50Hz or DC12V
- 1XGU10 35W Max(Globes not included)
- Extention optional

Dimensions

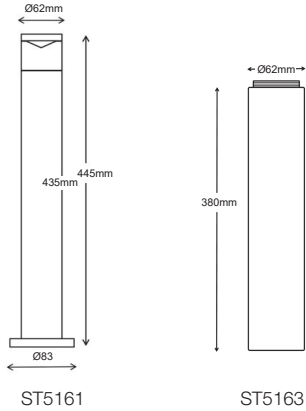

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST5161-BK12V	9360338004370	MAX 1*35W	Ø62*83*H445mm	BK	Aluminum body	10 PCS/CTN	220*520*H500mm
ST5161-TT12V	9360338004387	MAX 1*35W	Ø62*83*H445mm	Titanium	Aluminum body	10 PCS/CTN	220*520*H500mm
ST5161-BK240V	/	MAX 1*35W	Ø62*83*H445mm	BK	Aluminum body	10 PCS/CTN	220*520*H500mm
ST5161-TT240V	/	MAX 1*35W	Ø62*83*H445mm	Titanium	Aluminum body	10 PCS/CTN	220*520*H500mm
ST5163-BK12V	9360338004394	MAX 1*35W	Ø62*H380mm	BK	Aluminum body	25 PCS/CTN	370*370*H420mm
ST5163-TT12V	9360338004400	MAX 1*35W	Ø62*H380mm	Titanium	Aluminum body	25 PCS/CTN	370*370*H420mm


LED OUTDOOR LIGHT SERIES



Product Features

- Stainless steel body
- Clear acrylic diffuser
- IP rating : IP44
- Input AC240V
- E27 MAX 40W (Globe Not Included)

Dimensions

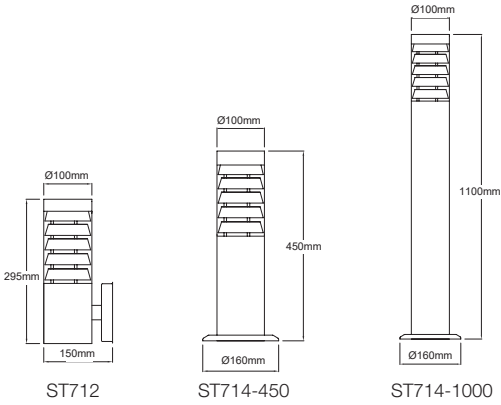

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST712-BK	9360338004196	MAX 1*40W	Ø100*150*H295mm	BK	Stainless Steel	6 PCS/CTN	395*305*H330mm
ST712-SC	9360338004202	MAX 1*40W	Ø100*150*H295mm	Stainless Steel	Stainless Steel	6 PCS/CTN	395*305*H330mm
ST714-450-SS	9360338004233	MAX 1*40W	Ø100*160*H450mm	Stainless Steel	Stainless Steel	6 PCS/CTN	515*350*H480mm
ST714-450-BK	9360338004240	MAX 1*40W	Ø100*160*H450mm	BK	Stainless Steel	6 PCS/CTN	515*350*H480mm
ST714-1000-SS	9360338004219	MAX 1*40W	Ø100*160*H1100mm	Stainless Steel	Stainless Steel	6 PCS/CTN	1030*350*H520mm
ST714-1000-BK	9360338004226	MAX 1*40W	Ø100*160*H1100mm	BK	Stainless Steel	6 PCS/CTN	1030*350*H520mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body
- Tempered glass diffuser
- IP rating :IP65
- Input AC240V 50Hz
- 1 Or 2XGU10 35W Max(Globes not included)

Dimensions

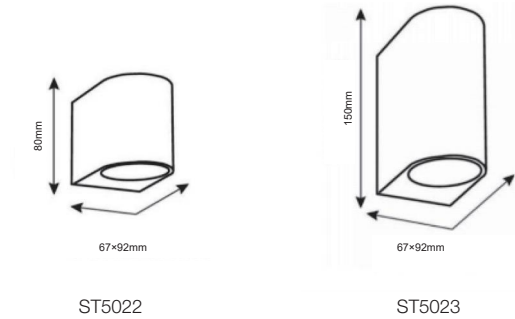

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST5022-BKGU	9360338004264	MAX 1*35W	67*92*H80mm	BK	Aluminum body	20 PCS/CTN	430*230*H220mm
ST5022-SLGU	9360338011675	MAX 1*35W	67*92*H80mm	SILVER	Aluminum body	20 PCS/CTN	430*230*H220mm
ST5023-BKGU	9360338004271	MAX 2*35W	67*92*H150mm	BK	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5023-SLGU	9360338004288	MAX 2*35W	67*92*H150mm	SILVER	Aluminum body	20 PCS/CTN	420*400*H180mm


LED OUTDOOR LIGHT SERIES



Product Features

- Aluminum body
- Tempered glass diffuser
- IP rating :IP 65
- Input 240V 50Hz
- 1 Or 2XGU10 35W Max(Globes not included)

Dimensions

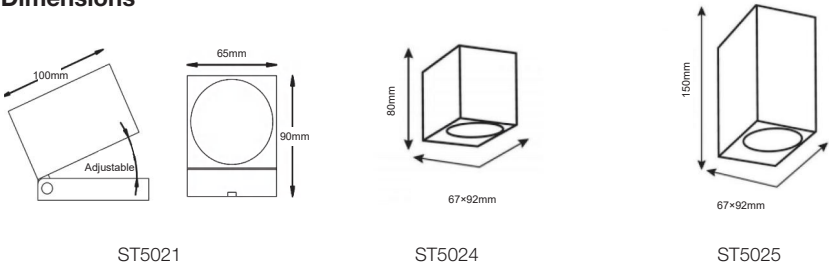

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST5021-BKGU	9360338004257	MAX 1*35W	65*90*H100mm	BK	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5021-WHGU	9360338007166	MAX 1*35W	65*90*H100mm	WH	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5021-SLGU	9360338011668	MAX 1*35W	65*90*H100mm	SILVER	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5024-BKGU	9360338004295	MAX 1*35W	67*92*H80mm	BK	Aluminum body	20 PCS/CTN	430*230*H250mm
ST5024-SLGU	9360338004301	MAX 1*35W	67*92*H80mm	SILVER	Aluminum body	20 PCS/CTN	430*230*H250mm
ST5025-BKGU	9360338004318	MAX 2*35W	67*92*H150mm	BK	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5025-WHGU	9360338008842	MAX 2*35W	67*92*H150mm	WH	Aluminum body	20 PCS/CTN	420*400*H180mm
ST5025-ALGU	9360338008859	MAX 2*35W	67*92*H150mm	SILVER	Aluminum body	20 PCS/CTN	420*400*H180mm

LED OUTDOOR LIGHT SERIES




Product Features

- Modern Design
- No UV and IR Radiation
- Outdoor Lighting IP65
- Made with Certified SMD LED Chips, tricolor
- Die Cast Aluminum Construction with RAL 9004 Matt Finis



Dimensions



ST258

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Grid	Box
ST258-BKTC2X3D	9360338004769	2*3W	520lm	135*120*100mm	BK	Aluminum	105°	3000K/4000K/5700K	20 PCS/CTN	620*315*H240mm
ST258-WHTC2X3D	9360338004752	2*3W	520lm	135*120*100mm	WH	Aluminum	105°	3000K/4000K/5700K	20 PCS/CTN	620*315*H240mm

LED OUTDOOR LIGHT SERIES



ST259-BKTC2X3



ST259-WHTC2X3




Product Features

- Modern Design
- No UV and IR Radiation
- Outdoor Lighting IP65
- Made with Certified COB LED Chips, tricolor
- Die Cast Aluminum Construction with RAL 9004 Matt Finis





Dimensions



ST259

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Pack	Box
ST259-BKTC2X3	9360338004783	2*3W	520lm	100*100*100mm	BK	Aluminum	0-90°	3000K/4000K/5700K	20 PCS/CTN	570*235*H480mm
ST259-WHTC2X3	9360338004776	2*3W	520lm	100*100*100mm	WH	Aluminum	0-90°	3000K/4000K/5700K	20 PCS/CTN	570*235*H480mm



LED OUTDOOR LIGHT SERIES



ST367-BKTC2X5W240V



ST367-WHTC2X5W240V



White




Black




Product Features

- Outdoor Lighting IP65
- Die - cast Aluminium with RAL 9004 Matt Finish
- Pre-set tru-color-temperature switch
- 3 years warranty

Dimensions




ST367

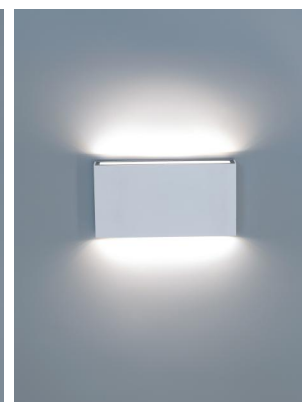

Technical Specification

Model	Barcode	W	Input	lm	Size	Color	Material	Beam Angle	CCT	Packaging
ST367-WHTC2X5W240V	9360338004745	2*5W	AC240V	600lm	175*30*H90 mm	BK	Aluminum	92°	3000K/4000K/5500K	20 PCS/CTN
ST367-BKTC2X5W240V	9360338004738	2*5W	AC240V	600lm	175*30*H90 mm	WH	Aluminum	92°	3000K/4000K/5500K	20 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Outdoor Lighting IP65
- Three years repalcement warranty

Dimensions

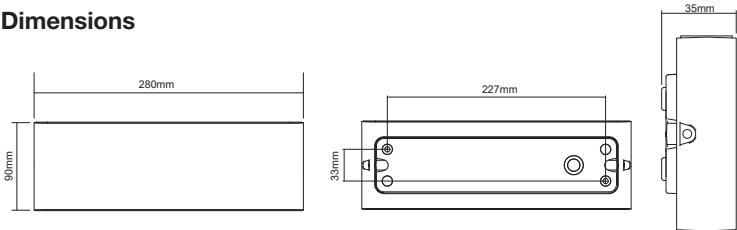

ST368-BKTC2X12W240V & ST368-WHTC2X12W240V



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT
ST368-WHTC2X12W240V	9360338008132	2*12W	1300lm	280*90*35mm	WH	Aluminum	102°	3000K/4000K/5500K
ST368-BKTC2X12W240V	9360338008149	2*12W	1300lm	280*90*35mm	BK	Aluminum	102°	3000K/4000K/5500K

LED OUTDOOR LIGHT SERIES




Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP65
- Die - cast Aluminium with RAL 9004 Matt Finish
- Made with LM - 65 certified LED chips



Dimensions

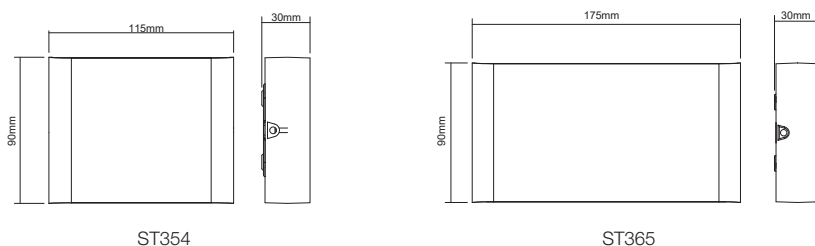

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
ST354-WHTC2X3W12V	9360338004660	2*3W	300lm	115*30*H90mm	WH	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	270*220*H220mm
ST354-BKTC2X3W12V	9360338004653	2*3W	300lm	115*30*H90mm	BK	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	270*220*H220mm
ST354-WHTC2X3W240V	9360338004646	2*3W	300lm	115*30*H90mm	WH	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	270*220*H220mm
ST354-BKTC2X3W240V	9360338004639	2*3W	300lm	115*30*H90mm	BK	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	270*220*H220mm
ST365-WHTC2X5W12V	9360338004721	2*5W	600lm	175*30*H90mm	WH	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	390*220*H220mm
ST365-BKTC2X5W12V	9360338004714	2*5W	600lm	175*30*H90mm	BK	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	390*220*H220mm
ST365-WHTC2X5W240V	9360338004707	2*5W	600lm	175*30*H90mm	WH	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	390*220*H220mm
ST365-BKTC2X5W240V	9360338004691	2*5W	600lm	175*30*H90mm	BK	Aluminum	120°	3000K/4000K/5500K	20 PCS/CTN	390*220*H220mm

LED OUTDOOR LIGHT SERIES




Product Features

- Modern design DOWN ONLY lights
- Outdoor Lighting IP65
- Die - cast Aluminium with RAL 9004 Matt Finish
- Down Wall Light



Dimensions

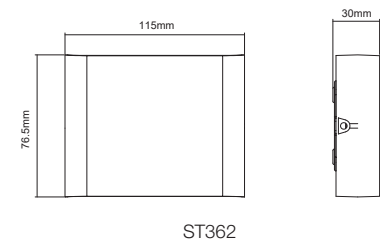

Technical Specification

Model	Barcode	W	Input	lm	Size	Color	Material	Beam	CCT	Box	Unit
ST362-WHTC3W12V	9360338004585	3W	DC12V	190lm	115*30*H76.5mm	WH	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	270*220*H200mm
ST362-BKTC3W12V	9360338004578	3W	DC12V	190lm	115*30*H76.5mm	BK	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	270*220*H200mm
ST362-WHTC3W240V	9360338004561	3W	AC240V	190lm	115*30*H76.5mm	WH	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	270*220*H200mm
ST362-BKTC3W240V	9360338004554	3W	AC240V	190lm	115*30*H76.5mm	BK	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	270*220*H200mm

LED OUTDOOR LIGHT SERIES



White Black




Product Features

- Modern design DOWN ONLY lights
- Outdoor Lighting IP65
- Die - cast Aluminium with RAL 9004 Matt Finish
- Down Wall Light



Dimensions

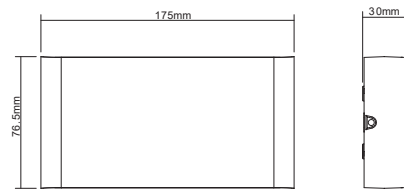

ST363

Technical Specification

Model	Barcode	W	Input	lm	Size	Color	Material	Beam	CCT	Pack	Box
ST363-WHTC7W12V	9360338004622	7W	DC12V	430lm	175*30*H76.5mm	WH	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	390*220*H200mm
ST363-BKTC7W12V	9360338004615	7W	DC12V	430lm	175*30*H76.5mm	BK	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	390*220*H200mm
ST363-WHTC7W240V	9360338004608	7W	AC240V	430lm	175*30*H76.5mm	WH	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	390*220*H200mm
ST363-BKTC7W240V	9360338004592	7W	AC240V	430lm	175*30*H76.5mm	BK	Aluminum	90°	3000K/4000K/5500K	20 PCS/CTN	390*220*H200mm


LED OUTDOOR LIGHT SERIES




White Black Golden

Product Features

- Modern design LED Dimmable lights
- Outdoor Lighting IP65 & IK07
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch

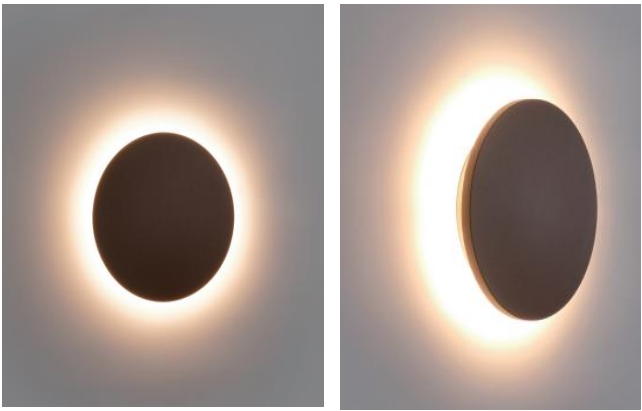

Dimensions



Technical Specification


Model	Barcode	W	Input	lm	Size	Color	Material		CCT	
W13141-WHTC7D	9360338004486	7W	AC240V	450lm	Ø135*H40mm	WH	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13141-BKTC7D	9360338004479	7W	AC240V	350lm	Ø135*H40mm	BK	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13141-GDTC7D	9360338009504	7W	AC240V	400lm	Ø135*H40mm	GD	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13141-BK12V	/	7W	DC12V	400lm	Ø135*H40mm	BK	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES




Product Features

- Modern design LED Dimmable lights
- Outdoor Lighting IP65 & IK07
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

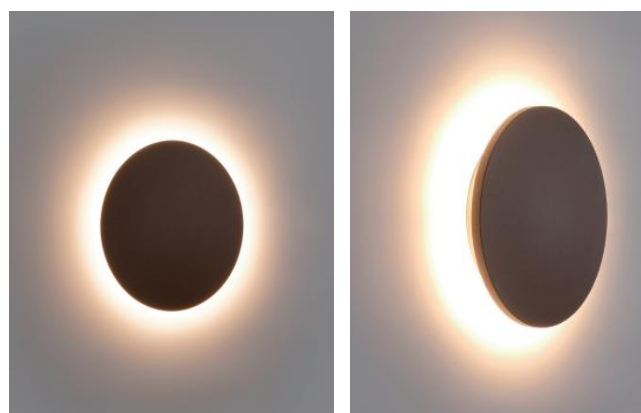

Dimensions



W13142

Technical Specification

Model	Barcode	W	Input	lm	Size	Color	Material	Beam Angle	CCT	Packaging
W13142-WHTC9D	9360338004509	9W	AC240V	850lm	Ø180*H40mm	WH	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13142-BKTC9D	9360338004493	9W	AC240V	730lm	Ø180*H40mm	BK	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13142-GDTC9D	9360338009511	9W	AC240V	620lm	Ø180*H40mm	GD	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN
W13142-BK12V	/	9W	DC12V	730lm	Ø180*H40mm	BK	Die-cast Aluminium	80°	3000K/4000K/5000K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



White

Black

Golden

80°

AC 240V

CRI 80


IP65

3000K-5000K


3 years

Product Features

- Modern design LED Dimmable lights
- Outdoor Lighting IP65 & IK07
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch

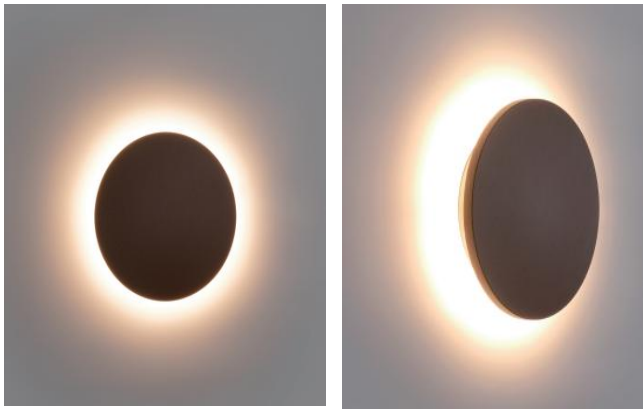

Dimensions



W13143

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	
W13143-WHTC18D	9360338007739	18W	1500lm	Ø230*H55mm	WH	Die-cast Aluminium	80°	3000K/4000K/5000K	5 PCS/CTN
W13143-BKTC18D	9360338007746	18W	1300lm	Ø230*H55mm	BK	Die-cast Aluminium	80°	3000K/4000K/5000K	5 PCS/CTN
W13143-GDTC18D	9360338009528	18W	1200lm	Ø230*H55mm	GD	Die-cast Aluminium	80°	3000K/4000K/5000K	5 PCS/CTN


LED OUTDOOR LIGHT SERIES



Product Features

- Modern Design
- Made with Certified SMD LED Chips, tricolor
- Waterproof IP65

Dimensions

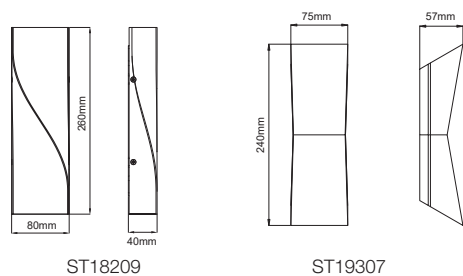

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Weight
ST18209-WHTC6W	9360338003168	6W	195lm	80*40*H260mm	WH	Aluminum	234°	3000K/4000K/6500K	12 PCS/CTN	380*290*H170mm
ST18209-BKTC6W	9360338003151	6W	195lm	80*40*H260mm	BK	Aluminum	234°	3000K/4000K/6500K	12 PCS/CTN	380*290*H170mm
ST19307-WHTC6W	9360338003144	6W	216lm	75*57*H240mm	WH	Aluminum	228°	3000K/4000K/6500K	12 PCS/CTN	270*280*H300mm
ST19307-BKTC6W	9360338003137	6W	216lm	75*57*H240mm	BK	Aluminum	228°	3000K/4000K/6500K	12 PCS/CTN	270*280*H300mm


LED OUTDOOR LIGHT SERIES



Product Features

- Modern Design
- Outdoor Lighting IP54
- Pre-set tri color temperature switch

Dimensions



ST2929-BKTC2X5W
ST2929-WHTC2X5W

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Box	Package
ST2929-BKTC2X5W	9360338004417	2*5W	470lm	Ø90*102*H180mm	BK	Aluminum	60°	3000K/4000K/5500K	20 PCS/CTN	520*400*H240mm
ST2929-WHTC2X5W	9360338004424	2*5W	470lm	Ø90*102*H180mm	WH	Aluminum	60°	3000K/4000K/5500K	20 PCS/CTN	520*400*H240mm

LED OUTDOOR LIGHT SERIES



White Black Stainless steel


White Black



Product Features

- Aluminium/Stainless steel 304 body
- Stainless steel base
- Tempered glass diffuser
- 240V AC 50HZ, GU10 35W MAX (Globe Not Included)

Dimensions

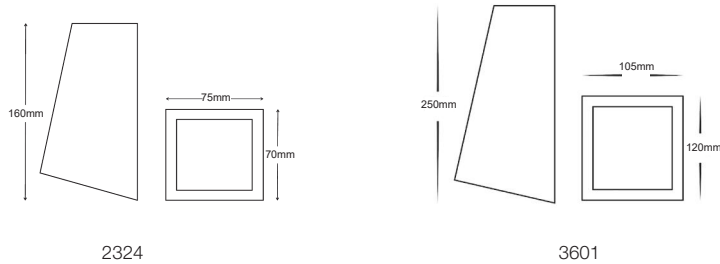

Technical Specification

Model	Barcode	W	Size	Color	Material		
2324-SSGU	9360338003038	MAX 1*35W	75*70*H160mm	Stainless Steel	Stainless Steel 304	20 PCS/CTN	450*190*H360mm
2324-BKGU	9360338003021	MAX 1*35W	75*70*H160mm	BK	Aluminium	20 PCS/CTN	450*190*H360mm
2324-WHGU	9360338003045	MAX 1*35W	75*70*H160mm	WH	Aluminium	20 PCS/CTN	450*190*H360mm
3601-WHGU	9360338003069	MAX 1*35W	120*105*H250mm	WH	Aluminium	20 PCS/CTN	580*550*H270mm
3601-BKGU	9360338003052	MAX 1*35W	120*105*H250mm	BK	Aluminium	20 PCS/CTN	580*550*H270mm

LED OUTDOOR LIGHT SERIES



 Black  Stainless steel










Product Features

- Aluminum/Stainless steel body
- 240V AC 50HZ
- 2XGU10 35W MAX (Globe Not Included)

Dimensions



AL5608-BK & ST5608-SS

Technical Specification

Model	Barcode	W	Size	Color	Material		
ST5608-SS	9360338004431	MAX 2*35W	65*92*H185mm	Stainless Steel	Stainless Steel	12 PCS/CTN	335*210*H320mm
AL5608-BK	9360338004448	MAX 2*35W	65*92*H185mm	BK	Aluminium	12 PCS/CTN	335*210*H320mm


LED OUTDOOR LIGHT SERIES




Product Features

- Aluminum Or Stainless steel body
- Clear PC Diffusor
- IP rating :IP44
- Input AC240V
- GU10 2X20W Max(Globes not included)
- Up Down

Dimensions



257AL-2-BK & 2572-SS2XGU & 257AL-2-SL



256AL-2-BK & 2562-SS2XGU & 256AL-2-SL

Technical Specification

Model	Barcode	W	Size	Color	Material		
257AL-2-BK	9360338003861	MAX 2*35W	110*102*H255mm	Black	Aluminium	12 PCS/CTN	460*365*H285mm
2572-SS2XGU	9360338003847	MAX 2*35W	110*102*H255mm	Stainless steel	Stainless steel	6 PCS/CTN	365*280*H240mm
257AL-2-SL	9360338003878	MAX 2*35W	110*102*H255mm	Silver	Stainless steel	12 PCS/CTN	460*365*H285mm
256AL-2-BK	9360338003816	MAX 2*35W	110*102*H255mm	Black	Aluminium	12 PCS/CTN	460*365*H285mm
2562-SS2XGU	9360338003793	MAX 2*35W	110*102*H255mm	Stainless steel	Stainless steel	6 PCS/CTN	365*280*H240mm
256AL-2-SL	9360338003823	MAX 2*35W	110*102*H255mm	Silver	Stainless steel	12 PCS/CTN	460*365*H285mm

LED OUTDOOR LIGHT SERIES




Black Stainless steel




Product Features

- Aluminum Or Stainless steel body
- Clear PC Diffusor
- IP rating :IP44
- Input AC240V
- GU10 1X20W Max(Globes not included)
- Down Only

Dimensions



257AL-BK & 2571-SS1XGU



256AL-BK & 2561-SS1XGU

Technical Specification

Model	Barcode	W	Size	Color	Material		
257AL-BK	9360338003854	MAX 1*35W	110*102*H158mm	Black	Aluminium	12 PCS/CTN	460*365*H200mm
2571-SS1XGU	9360338003830	MAX 1*35W	110*102*H158mm	Stainless steel	Stainless steel	12 PCS/CTN	460*365*H285mm
256AL-BK	9360338003809	MAX 1*35W	110*102*H158mm	Black	Aluminium	12 PCS/CTN	460*365*H200mm
2561-SS1XGU	9360338003786	MAX 1*35W	110*102*H158mm	Stainless steel	Stainless steel	12 PCS/CTN	460*365*H285mm


LED OUTDOOR LIGHT SERIES



Product Features

- Modern Design
- AC240V 50Hz
- Material: Concrete+Aluminium
- Colour Finish: Black, White, Natural
- Water proof IP65
- GU10 2X35W MAX(Globe Not Included)

Dimensions

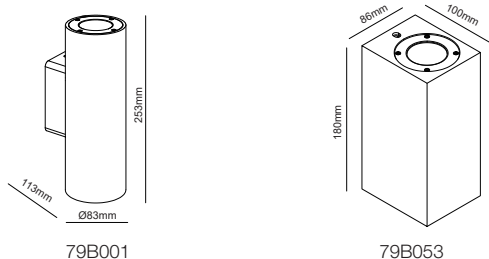

Technical Specification

Model	Barcode	W	Size	Color	Material		
79B001BC	9360338004837	MAX 2*35W	Ø83*113*H253mm	BK	Concrete+Alumium	4 PCS/CTN	285*265*H245mm
79B001NC	9360338004844	MAX 2*35W	Ø83*113*H253mm	NATRUAL	Concrete+Alumium	4 PCS/CTN	285*265*H245mm
79B001WC	9360338004851	MAX 2*35W	Ø83*113*H253mm	WH	Concrete+Alumium	4 PCS/CTN	285*265*H245mm
79B053BC	9360338004868	MAX 2*35W	86*100*H180mm	BK	Concrete+Alumium	4 PCS/CTN	315*275*H340mm
79B053NC	9360338004875	MAX 2*35W	86*100*H180mm	NATURAL	Concrete+Alumium	4 PCS/CTN	315*275*H340mm
79B053WC	9360338004882	MAX 2*35W	86*100*H180mm	WH	Concrete+Alumium	4 PCS/CTN	315*275*H340mm


LED OUTDOOR LIGHT SERIES



Product Features

- Modern Design
- Tempered glass diffuser
- Outdoor Lighting IP54
- Pre-set tri color temperature switch

Dimensions

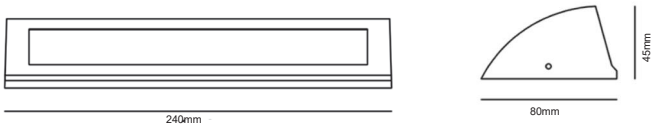

ST6050

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
ST6050-WH240V	9360338003120	10W	1100-1200lm	240*80*45mm	WH	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm
ST6050-WH12V	9360338003113	10W	1100-1200lm	240*80*45mm	WH	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm
ST6050-BK240V	9360338003083	10W	1100-1200lm	240*80*45mm	BK	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm
ST6050-BK12V	9360338003076	10W	1100-1200lm	240*80*45mm	BK	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm
ST6050-SL240V	9360338003106	10W	1100-1200lm	240*80*45mm	SILVER	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm
ST6050-SL12V	9360338003090	10W	1100-1200lm	240*80*45mm	SILVER	Aluminium	105°	3000K/4000K/6000K	20 PCS/CTN	250*870*H500mm

LED OUTDOOR LIGHT SERIES




Black Stainless steel



Product Features

- Stainless steel body
- Opal PC diffuser
- IP rating :IP44
- Input AC240V
- E27 40W Max(Globes not included)

Dimensions

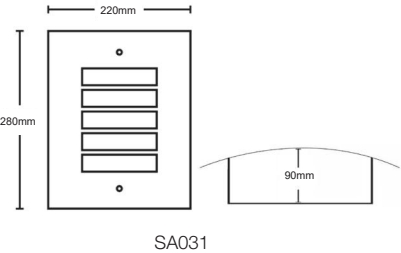

Technical Specification

Model	Barcode	W	Size	Color	Material		
SA031-SS	9360338003885	40W	220*90*H280mm	Stainless steel	Stainless steel	10 PCS/CTN	520*495*H305mm
SA031-BK	9360338011705	40W	220*90*H280mm	BK	Stainless steel	10 PCS/CTN	520*495*H305mm

LED OUTDOOR LIGHT SERIES






Black



Product Features

- Aluminium matt black
- Frosted glass diffuser
- Built in 10w LED, 3CCT changeable (3000K/4500K/6000K)
- SMD LED chips
- 3 Years Replacement Warranty

Dimensions

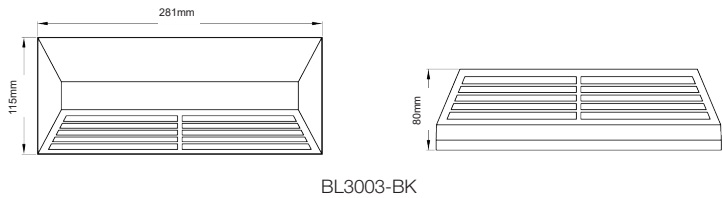

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packing	Weight
BL3003-BK	9360338007159	10W	1100-1200lm	281*115*80mm	BK	Aluminium	105°	3000K/4500K/6000K	12 PCS/CTN	585*305*270mm

LED OUTDOOR LIGHT SERIES



W11286-WHTC18



W11286-BKTC18



White




Black



Product Features

- Modern Design
- Outdoor Lighting IP65
- Pre-set tri color temperature switch

Dimensions




W11286



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
W11286-WHTC18	9360338004813	15W	766lm	218*103*85.5mm	WH	Aluminium	120°	3000K/4000K/5500K	20 PCS/CTN	595*480*H210mm
W11286-BKTC18	9360338004820	15W	766lm	218*103*85.5mm	BK	Aluminium	120°	3000K/4000K/5500K	20 PCS/CTN	595*480*H210mm

LED OUTDOOR LIGHT SERIES

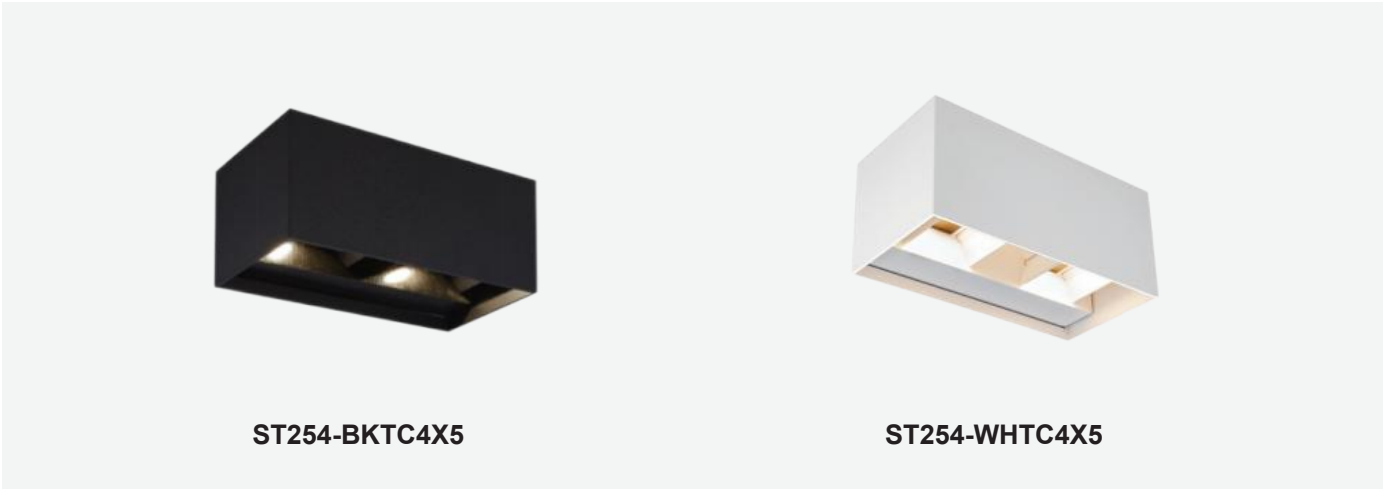


White


Black




0-90°


AC 240V


CRI 80



IP65





3 years

Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP65
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch

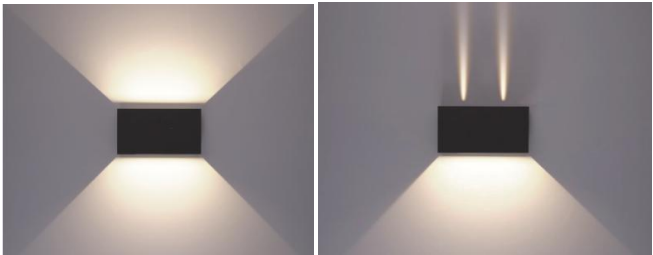

Dimensions

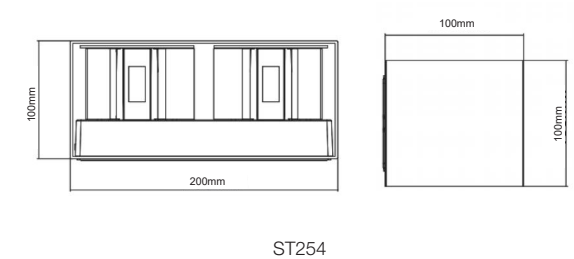

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	
ST254-WHTC4X5	9360338009030	4*5W	1000lm	200*100*H100mm	WH	Die-cast Aluminium	0-90°	3000K/4000K/6500K	10 PCS/CTN
ST254-BKTC4X5	9360338009047	4*5W	850lm	200*100*H100mm	BK	Die-cast Aluminium	0-90°	3000K/4000K/6500K	10 PCS/CTN

LED OUTDOOR LIGHT SERIES



DW13532



DW13531




Black



Product Features

- Modern design
- No UV and IR radiation
- Outdoor Lighting IP54
- Die - cast Aluminium with RAL 9004 Matt Finish
- Made with LM - 24 certified LED chips

Dimensions

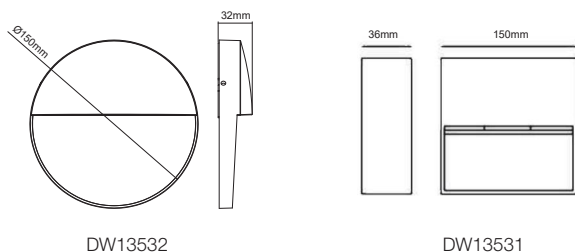



DW13532

DW13531

Technical Specification


Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
DW13532	9360338004455	3W	120lm	Ø150*32mm	BK	Die-cast Aluminium	120°	3000K/4000K/5000K	20 PCS/CTN	340*340*H220mm
DW13531	9360338004462	3W	115lm	150*150*36mm	BK	Die-cast Aluminium	120°	3000K/4000K/5000K	20 PCS/CTN	340*340*H220mm

LED OUTDOOR LIGHT SERIES

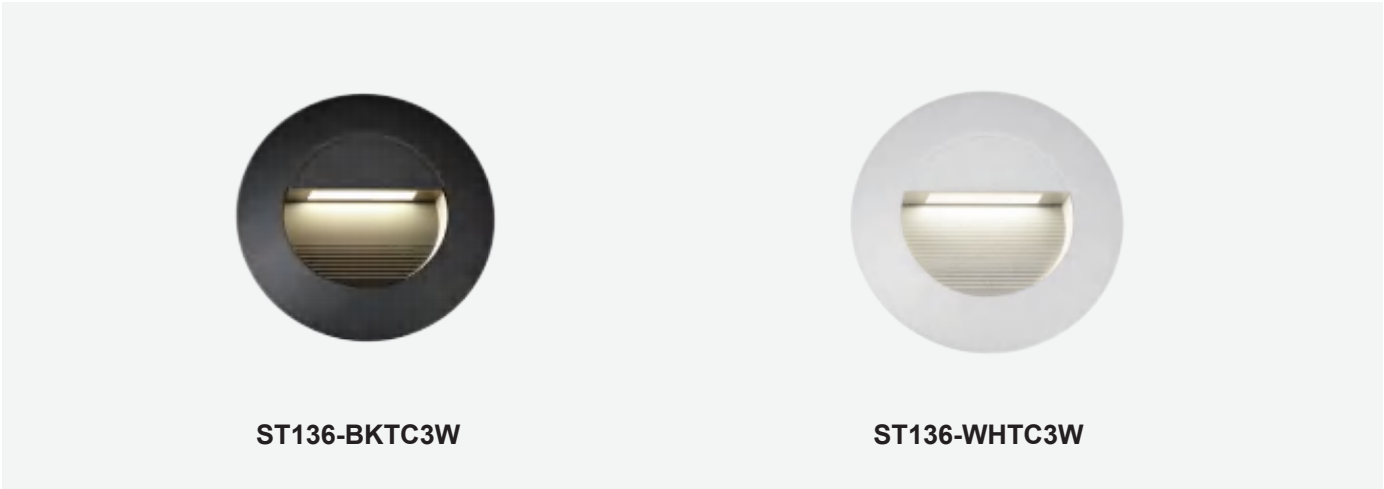


Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK02
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch

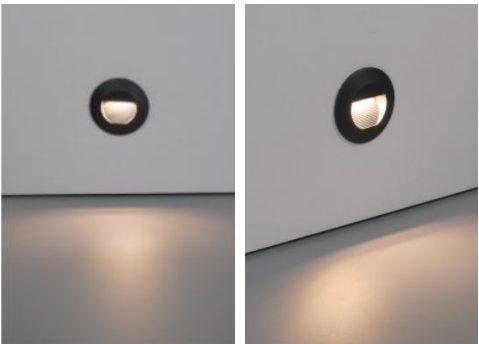


Dimensions

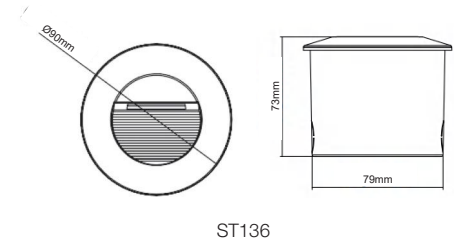

Technical Specification

Model	Barcode	W	lm	Input	Size	Color	Material		CCT	
ST136-WHTC3W240V	9360338008996	3W	150lm	AC240V	Ø90*H73mm	WH	Die-cast Aluminium	150°	3000K/4000K/5000K	50 PCS/CTN
ST136-BKTC3W240V	9360338009009	3W	100lm	AC240V	Ø90*H73mm	BK	Die-cast Aluminium	150°	3000K/4000K/5000K	50 PCS/CTN
ST136-WHTC3W12V	9360338009535	3W	150lm	DC12V	Ø90*H73mm	WH	Die-cast Aluminium	150°	3000K/4000K/5000K	50 PCS/CTN
ST136-BKTC3W12V	9360338009542	3W	100lm	DC12V	Ø90*H73mm	BK	Die-cast Aluminium	150°	3000K/4000K/5000K	50 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST137-BKTC3W240V



ST137-WHTC3W240V



White




Black




Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP54
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

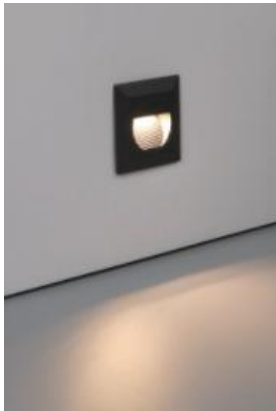

Dimensions

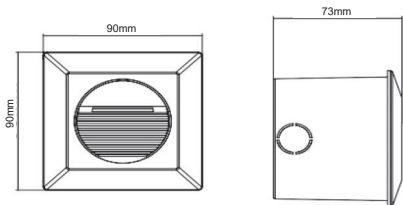


ST137

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging
ST137-WHTC3W240V	9360338009016	3W	180lm	90*90*H73mm	WH	Die-cast Aluminium	130°	3000K/4000K/5000K	30 PCS/CTN
ST137-BKTC3W240V	9360338009023	3W	100lm	90*90*H73mm	BK	Die-cast Aluminium	130°	3000K/4000K/5000K	30 PCS/CTN

LED OUTDOOR LIGHT SERIES



W13151-BKTC12



W13151-WHTC12




Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP54
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch



Dimensions

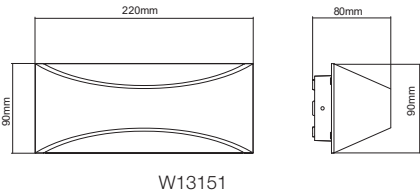

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging
W13151-WHTC12	9360338004523	12W	300lm	220*80*H90mm	WH	Die-cast Aluminium	198°	3000K/4000K/5000K	20 PCS/CTN
W13151-BKTC12	9360338004516	12W	200lm	220*80*H90mm	BK	Die-cast Aluminium	198°	3000K/4000K/5000K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST60-BKTC2X6W



ST60-WHTC2X6W



White




Black




Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

Dimensions



ST60

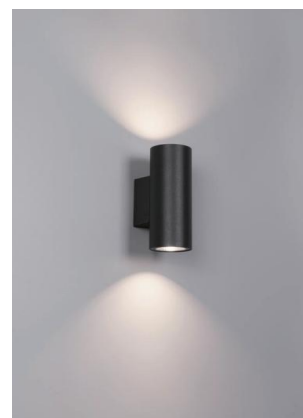

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging
ST60-WHTC2X6W	9360338009092	12W	1000lm	87*Ø60*H170mm	WH	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN
ST60-BKTC2X6W	9360338009085	12W	950lm	87*Ø60*H170mm	BK	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST61-BKTC6W



ST61-WHTC6W




Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch



Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	
ST61-WHTC6W	9360338009078	6W	600lm	87*Ø60*H126.5mm	WH	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN
ST61-BKTC6W	9360338009061	6W	500lm	87*Ø60*H126.5mm	BK	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST80-BKTC2X6W



ST80-WHTC2X6W



White




Black




Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

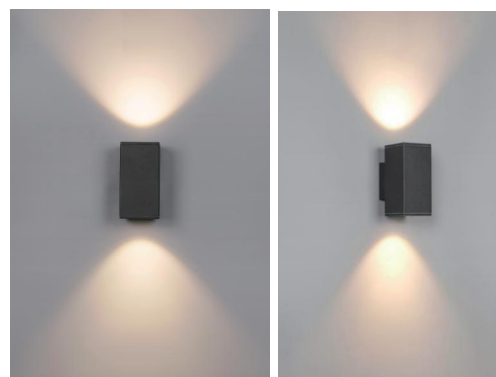

Dimensions

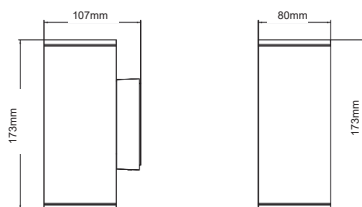

ST80

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging
ST80-WHTC2X6W	9360338009177	12W	1200lm	107*80*H173mm	WH	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN
ST80-BKTC2X6W	9360338009160	12W	1000lm	107*80*H173mm	BK	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST81-BKTC6W




ST81-WHTC6W



Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generaton LED chip
- Pre-set tru-color-temperature switch

Dimensions

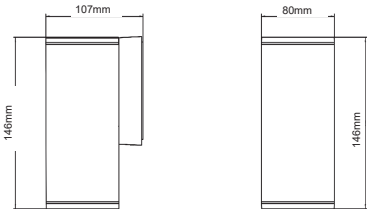

ST81

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	
ST81-WHTC6W	9360338009153	6W	600lm	107*80*H146mm	WH	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN
ST81-BKTC6W	9360338009146	6W	500lm	107*80*H146mm	BK	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	20 PCS/CTN

LED OUTDOOR LIGHT SERIES



ST100-BKTC2X12W



ST100-WHTC2X12W



White




Black




Product Features

- Modern design Lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

Dimensions



ST100



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging
ST100-WHTC2X12W	9360338009139	24W	1900lm	122*Ø100*H264mm	WH	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	10 PCS/CTN
ST100-BKTC2X12W	9360338009122	24W	1500lm	122*Ø100*H264mm	BK	Die-cast Aluminium	25°/60°	3000K/4000K/6500K	10 PCS/CTN

LED OUTDOOR LIGHT SERIES



WL13301-BKTC12PC




WL13301-WHTC12PC




Product Features

- Modern design UP DOWN lights
- Outdoor Lighting IP65 & IK04
- Die-cast Aluminium with RAL 9003/9004 Matt Finish
- New Generation LED chip
- Pre-set tru-color-temperature switch

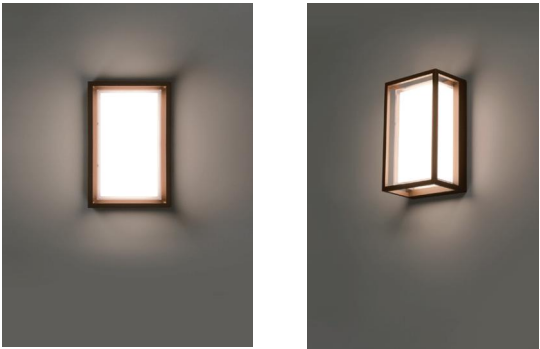

Dimensions



WL13301

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	
WL13301-WHTC12PC	9360338008248	12W	1100lm	145*100*H240mm	WH	Die-cast Aluminium	116°	3000K/4000K/5000K	10 PCS/CTN
WL13301-BKTC12PC	9360338008255	12W	1000lm	145*100*H240mm	BK	Die-cast Aluminium	116°	3000K/4000K/5000K	10 PCS/CTN

LED OUTDOOR LIGHT SERIES



WL31001-BKE27



WL31001-WHE27



White




Black



Product Features

- Modern design E27 lights
- Outdoor Lighting IP44 & IK02
- Die-cast Aluminium with RAL 9003/9004 Matt

Dimensions



WL13301

Technical Specification

Model	Barcode	W	Size	Color	Material	
WL31001-WHE27	9360338008187	MAX 15W	150*100*H260mm	WH	Die-cast Aluminium	5 PCS/CTN
WL31001-BKE27	9360338008194	MAX 15W	150*100*H260mm	BK	Die-cast Aluminium	5 PCS/CTN

LED OUTDOOR LIGHT SERIES



WL31004-BKE27




WL31004-WHE27



Product Features

- Modern design E27 lights
- Outdoor Lighting IP44 & IK02
- Die-cast Aluminium with RAL 9003/9004 Matt

Dimensions



WL31004

Technical Specification

Model	Barcode	W	Size	Color	Material	
WL31004-WHE27	9360338008200	MAX 15W	160*100*H330mm	WH	Die-cast Aluminium	5 PCS/CTN
WL31004-BKE27	9360338008217	MAX 15W	160*100*H330mm	BK	Die-cast Aluminium	5 PCS/CTN

LED OUTDOOR LIGHT SERIES



WL31031-BKE27




WL31031-WHE27



Product Features

- Modern design E27 lights
- Outdoor Lighting IP44 & IK02
- Die-cast Aluminium with RAL 9003/9004 Matt

Dimensions




WL31031

Technical Specification

Model	Barcode	W	Size	Color	Material	
WL31031-WHE27	9360338008224	MAX 15W	170*100*H260mm	WH	Die-cast Aluminium	5 PCS/CTN
WL31031-BKE27	9360338008231	MAX 15W	170*100*H260mm	BK	Die-cast Aluminium	5 PCS/CTN

LED OUTDOOR LIGHT SERIES

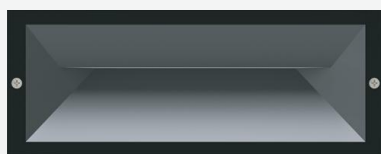


ST13305



ST13306




ST13307





Product Features

- Modern Design
- Opal PC diffuser
- Water proof IP65
- Pre-set tri color temperature switch



Dimensions




ST13305



ST13306




ST13307



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Box Size
ST13305-BK13TC	9360338004127	13W	639lm	250*98*90mm	BK	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13305-WH13TC	9360338004103	13W	639lm	250*98*90mm	WH	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13305-SL13TC	9360338004110	13W	639lm	250*98*90mm	SILVER	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13306-BK13TC	9360338004158	13W	639lm	250*98*90mm	BK	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13306-WH13TC	9360338004134	13W	639lm	250*98*90mm	WH	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13306-SL13TC	9360338004141	13W	639lm	250*98*90mm	SILVER	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H220mm
ST13307-BK13TC	9360338004189	13W	639lm	250*98*105mm	BK	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H250mm
ST13307-WH13TC	9360338004165	13W	639lm	250*98*105mm	WH	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H250mm
ST13307-SL13TC	9360338004172	13W	639lm	250*98*105mm	SILVER	Aluminium	108°	3000K/4000K/6500K	8 PCS/CTN	540*240*H250mm

LED OUTDOOR LIGHT SERIES

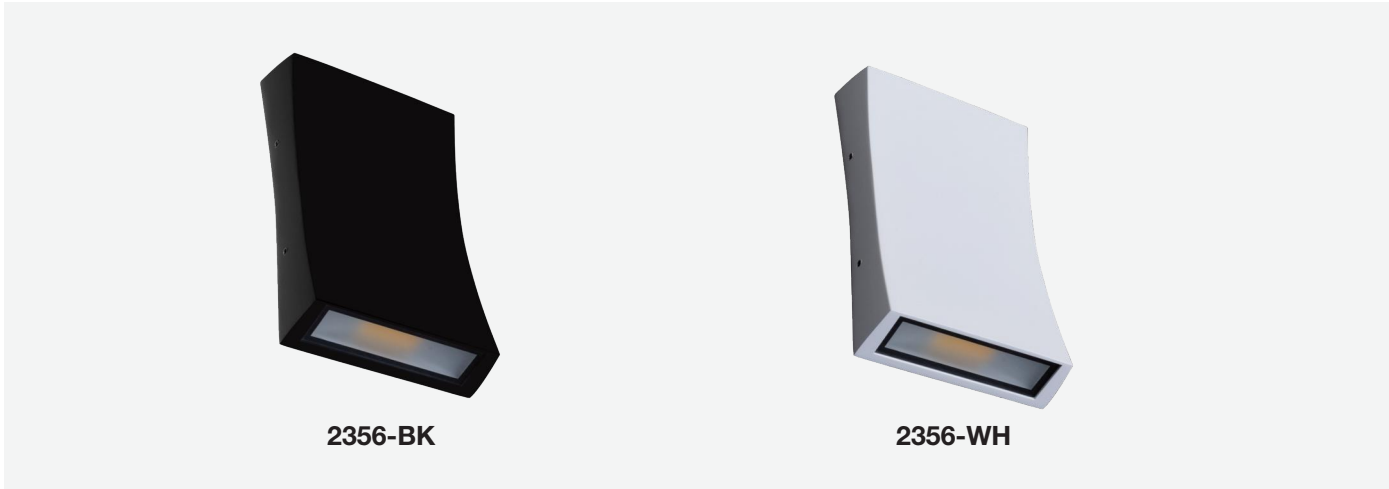


White Black



Product Features

- LED Wall Light
- Aluminium body
- 240V AC 50HZ
- LED COB 2*6W
- IP54

Dimensions



Technical Specification

Model	W	Size	Color	Material	
2356-BK	2*6W	143*230*41 mm	BK	Aluminum body	10 PCS/CTN
2356-WH	2*6W	143*230*41 mm	WH	Aluminum body	10 PCS/CTN

LED OUTDOOR LIGHT SERIES



2360



2361



Black



Titanium



120°

AC
240V

CRI 80



SMD




IP54

3
years


Product Features

- Modern Design
- AC240V 50Hz
- Opal PC diffuser
- Water proof IP65
- Made with Certified LM-80 SMD LED Chips

Dimensions



2360



2361

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
2360-BK6K6W	9360338003175	6W	400lm	Ø98*40mm	BK	Aluminium	120°	6000K	50 PCS/CTN	230*550*H270mm
2360-BK3K6W	9360338003182	6W	400lm	Ø98*40mm	BK	Aluminium	120°	3000K	50 PCS/CTN	230*550*H270mm
2360-TT6K6W	9360338008583	6W	400lm	Ø98*40mm	Titanium	Aluminium	120°	6000K	50 PCS/CTN	230*550*H270mm
2360-TT3K6W	9360338008590	6W	400lm	Ø98*40mm	Titanium	Aluminium	120°	3000K	50 PCS/CTN	230*550*H270mm
2361-BK6K6W	9360338008606	6W	400lm	Ø98*43mm	BK	Aluminium	120°	6000K	50 PCS/CTN	230*550*H270mm
2361-BK3K6W	9360338003199	6W	400lm	Ø98*43mm	BK	Aluminium	120°	3000K	50 PCS/CTN	230*550*H270mm
2361-TT6K6W	9360338008613	6W	400lm	Ø98*43mm	Titanium	Aluminium	120°	6000K	50 PCS/CTN	230*550*H270mm
2361-TT3K6W	9360338008620	6W	400lm	Ø98*43mm	Titanium	Aluminium	120°	3000K	50 PCS/CTN	230*550*H270mm

LED OUTDOOR LIGHT SERIES




Stainless steel



Product Features

- Modern Design
- Marine grade stainless steel 316
- DC 12V
- Water proof IP67
- MR16 20W Max (Globe Not Included)


Dimensions

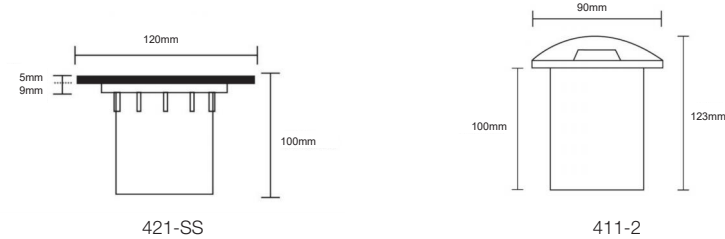

Technical Specification

Model	Barcode	W	Size	Color	Material		
421-SS	9360338003588	20W	Ø120*100mm	Stainless steel	Stainless steel 316 Top	20 PCS/CTN	680*280*H150mm
411-2	9360338003595	20W	Ø90*123mm	Stainless steel	Stainless steel 316	10 PCS/CTN	530*220*H150mm

LED OUTDOOR LIGHT SERIES

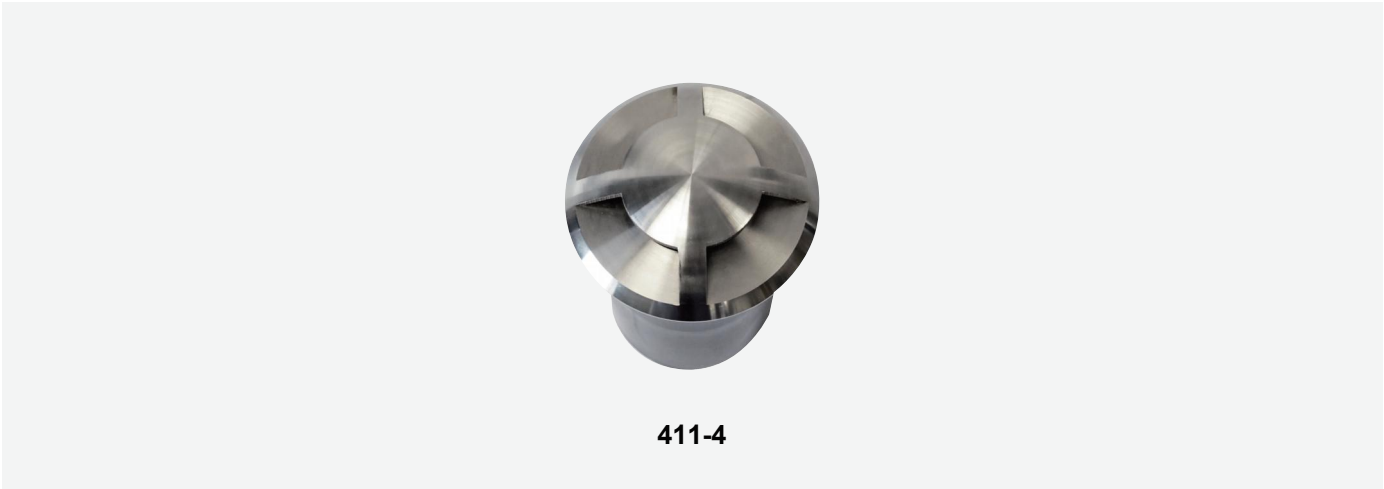


 Clear anodized



Product Features

- Marine grade stainless steel 316
- 12V AC/DC
- MR16 20W MAX
- IP67

Dimensions

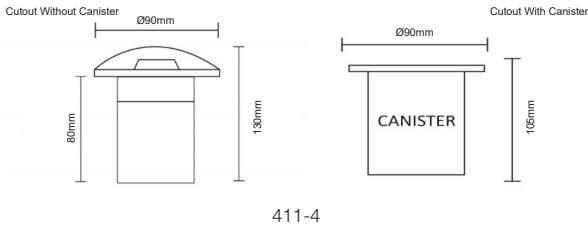

Technical Specification

Model	W	Size	Color	Material	
411-4	20W	Ø90*130mm	Clear anodized	Stainless Steel	10 PCS/CTN

LED OUTDOOR LIGHT SERIES





Stainless steel



Product Features

- Stainless steel cover+clear PC diffuser+transformer
- DC 12V
- Water proof IP67 fitting only
- Set of 5 pcs with built in LED (0.1W per pc, 0.5 W per set)


Dimensions

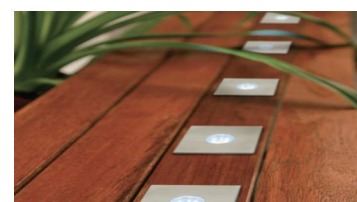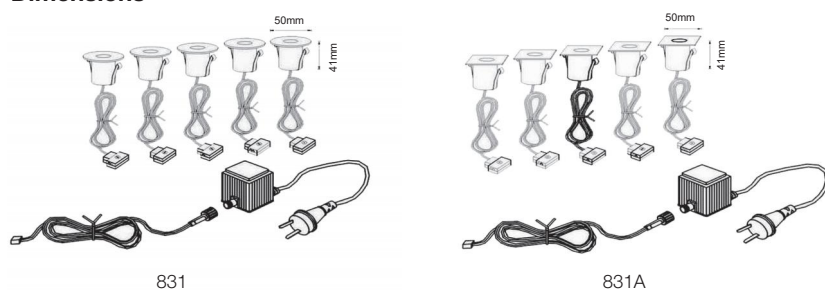

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
831-WH	9360338003465		520lm	Ø50*41mm	Stainless steel	Stainless steel+PC	WH(6000K)/BLUE	5 PCS/SET	8 SETS/CTN 440*350*H320mm
831-BLUE	/	0.1W built in LED PER PC	520lm	Ø50*41mm	Stainless steel	Stainless steel+PC	WH(6000K)/BLUE	5 PCS/SET	8 SETS/CTN 440*350*H320mm
831A-WH	9360338003489	(0.5W PER SET)	520lm	50*50*41mm	Stainless steel	Stainless steel+PC	WH(6000K)/BLUE	5 PCS/SET	8 SETS/CTN 440*350*H320mm
831A-BL	9360338003472		520lm	50*50*41mm	Stainless steel	Stainless steel+PC	WH(6000K)/BLUE	5 PCS/SET	8 SETS/CTN 440*350*H320mm

LED OUTDOOR LIGHT SERIES

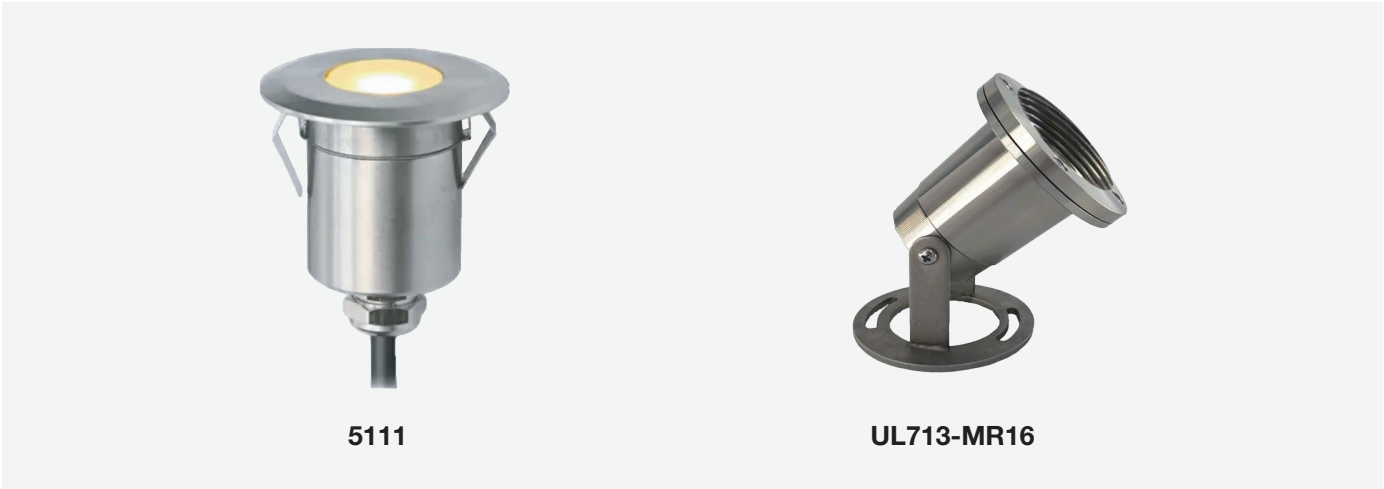

 Stainless steel










Product Features

- Marine grade stainless steel 316
- DC 12V
- **UL713-MR16**
- Water proof IP68
- MR16 20W Max (Globe Not Included)
- **5111**
- Water proof IP67
- Built in 1W LED 3000K/4000K

Dimensions

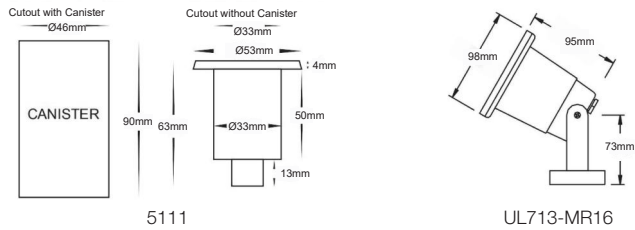

Technical Specification

Model	Barcode	W	Size	Color	Material	CCT		
5111-3K	9360338003601	1W	Ø53*63mm	Stainless steel	Stainless steel 316	3000K	25 PCS/CTN	350*350*H175mm
3A-5111-4K	/	1W	Ø53*63mm	Stainless steel	Stainless steel 316	4000K	25 PCS/CTN	350*350*H175mm
UL713-MR16	9360338003656	20W	Ø98*155mm	Stainless steel	Stainless steel 316	/	10 PCS/CTN	530*220*H175mm

LED OUTDOOR LIGHT SERIES



BL142

BL145



White


Black




Product Features

- Integrated 12W LED,
- IP66 weatherproof
- Frosted polycarbonate diffuser
- CCT changeable

Dimensions

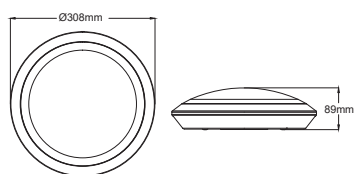

BL142

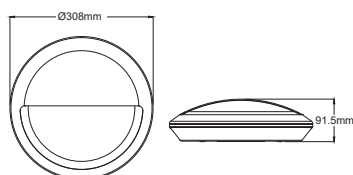

BL145

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
BL142-WHTC12	9360338011712	12W	1000lm	Ø308*H89mm	WH	Aluminium	3000K/4500K/6500K	6 PCS/CTN	570*335*H330mm
BL142-BKTC12	9360338004080	12W	1000lm	Ø308*H89mm	BK	Aluminium	3000K/4500K/6500K	6 PCS/CTN	570*335*H330mm
BL145-WHTC12	9360338004097	12W	1000lm	Ø308*H91.5mm	WH	Aluminium	3000K/4500K/6500K	6 PCS/CTN	570*335*H330mm
BL145-BKTC12	9360338011729	12W	1000lm	Ø308*H91.5mm	BK	Aluminium	3000K/4500K/6500K	6 PCS/CTN	570*335*H330mm


LED OUTDOOR LIGHT SERIES



Product Features

- Integrated 15W LED,
- High lumen output
- IP65 weatherproof
- IK08 impact resistant
- Frosted polycarbonate diffuser
- CCT changeable

Dimensions

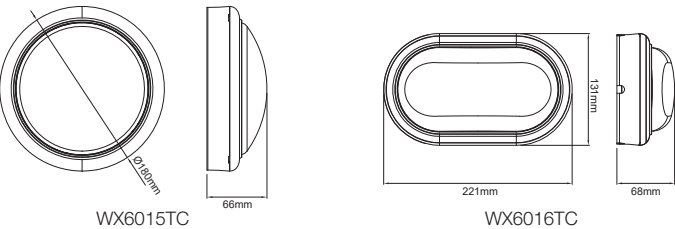

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
WX6015-BKTC15	9360338004059	15W	1250lm	Ø180*H66mm	BK	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	360*360*H330mm
WX6015-WHTC15	9360338004066	15W	1250lm	Ø180*H66mm	WH	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	360*360*H330mm
WX6016-BKTC15	9360338004035	15W	1250lm	L221*W131*H68mm	BK	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	380*380*H385mm
WX6016-WHTC15	9360338004042	15W	1250lm	L221*W131*H68mm	WH	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	380*380*H385mm

LED OUTDOOR LIGHT SERIES




WX6015-TC15SEN



Product Features

- PIR Sensor
- Integrated 15W LED, high lumen output
- IP54 weatherproof, IK08 impact resistant
- Frosted polycarbonate diffuser
- CCT changeable

Dimensions

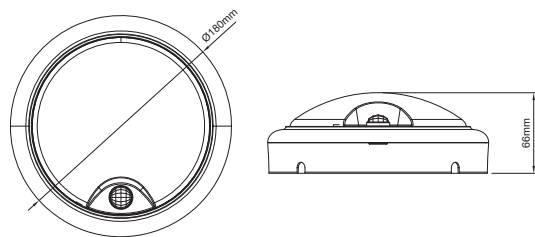

WX6015-TC15SEN

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
WX6015-BKTC15SEN	9360338008262	15W	1250lm	Ø180*H66mm	BK	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	360*360*H330mm
WX6015-WHTC15SEN	9360338004073	15W	1250lm	Ø180*H66mm	WH	Aluminium	110°	3000K/4000K/6000K	20 PCS/CTN	360*360*H330mm

LED OUTDOOR LIGHT SERIES



Product Features

· E27 60W max (Not included)

Technical Specification

Model	Barcode	W	Size	Color	Material		
WX4011-SL	9360338003915	60W	260*180*140mm	SILVER	Aluminium	12 PCS/CTN	570*380*H430mm
WX4011-BK	9360338003908	60W	260*180*140mm	BK	Aluminium	12 PCS/CTN	570*380*H430mm

Technical Specification



Model	Barcode	W	Size	Color	Material		
WX4017-SL	9360338011736	60W	260*180*140mm	SILVER	Aluminium	12 PCS/CTN	520*420*H290mm
WX4017-BK	9360338003939	60W	260*180*140mm	BK	Aluminium	12 PCS/CTN	520*420*H290mm
WX4018-SL	9360338011743	60W	260*180*140mm	SILVER	Aluminium	12 PCS/CTN	520*420*H290mm
WX4018-BK	9360338003946	60W	260*180*140mm	BK	Aluminium	12 PCS/CTN	520*420*H290mm
WX4019-SL	9360338003960	60W	260*180*140mm	SILVER	Aluminium	12 PCS/CTN	520*420*H290mm
WX4019-BK	9360338003953	60W	260*180*140mm	BK	Aluminium	12 PCS/CTN	520*420*H290mm

Technical Specification

Model	Barcode	W	Size	Color	Material		
WX4026-SL	9360338003984	60W	Ø270*H85mm	SILVER	Aluminium	8 PCS/CTN	570*360*H300mm
WX4026-BK	9360338003977	60W	Ø270*H85mm	BK	Aluminium	8 PCS/CTN	570*360*H300mm
WX4026-WH	9360338003991	60W	Ø270*H85mm	WH	Aluminium	8 PCS/CTN	570*360*H300mm
WX4028-SL	9360338004028	60W	Ø270*H85mm	SILVER	Aluminium	8 PCS/CTN	570*360*H300mm
WX4028-BK	9360338004011	60W	Ø270*H85mm	BK	Aluminium	8 PCS/CTN	570*360*H300mm




LED STEP LIGHT SERIES

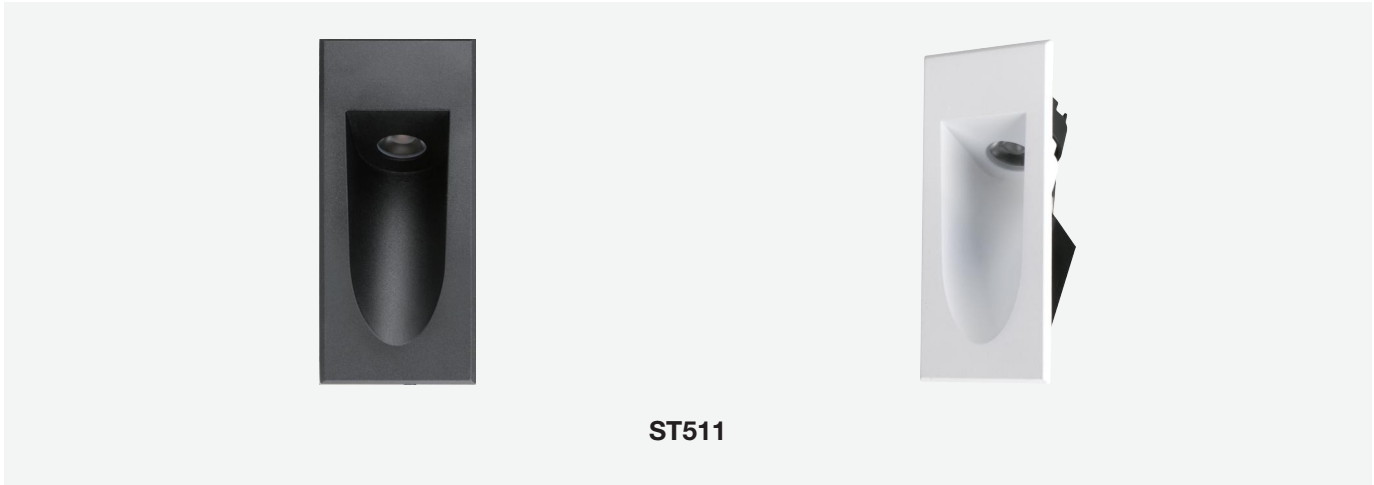

Product Features

- Made of die-casting,powder coating finish from AkzoNobel.
- High density COB with uniform lighting distribution.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee



Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
ST511-WHTC3W	9360338003205	3W	100-129lm	L140*W60*H54mm	L125*W50mm	WH	Die-cat Aluminum	25°	3000K/4000K/5000K	50PCS/CTN	345*345*320mm
ST511-BKTC3W	9360338003212	3W	107-132lm	L140*W60*H54mm	L125*W50mm	BK	Die-cat Aluminum	25°	3000K/4000K/5000K	50PCS/CTN	345*345*320mm

LED STEP LIGHT SERIES

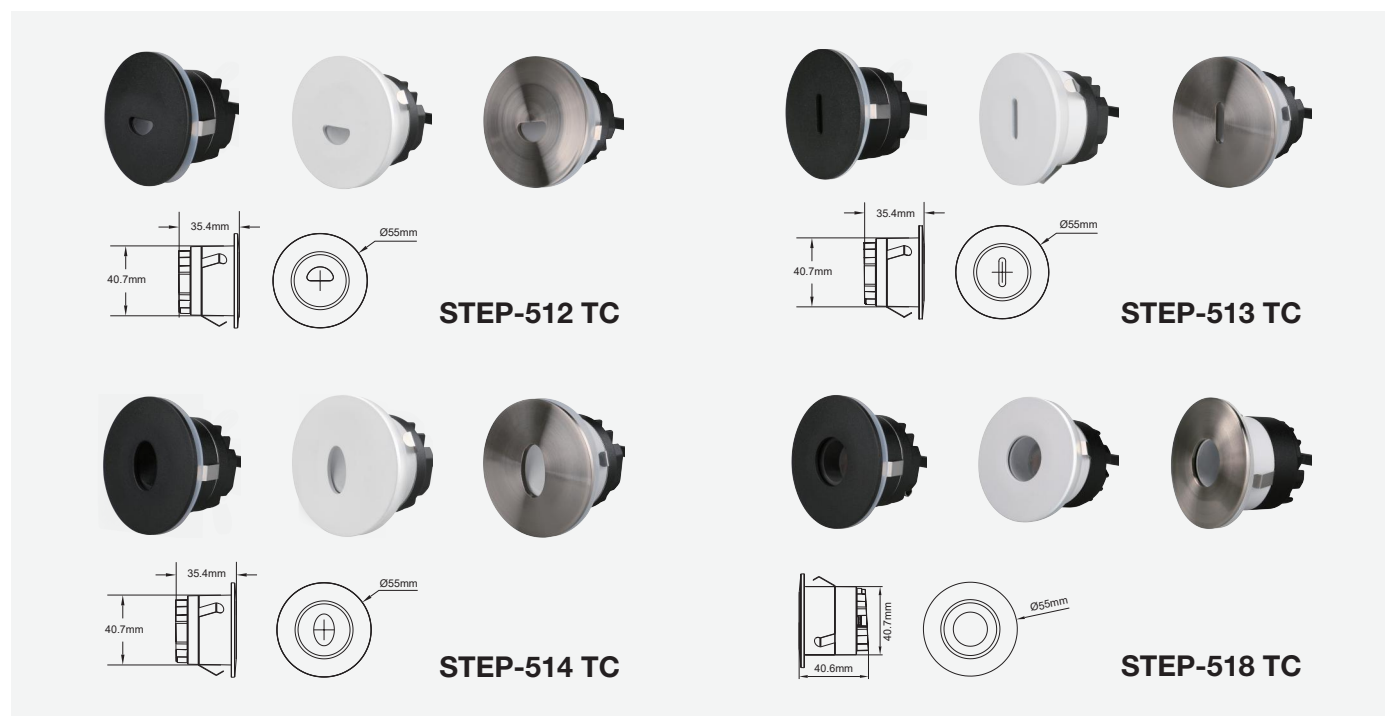



Product Features

- Made of die-casting, powder coating finish from AkzoNobel.
- Interchangeable faceplate with magnetic design.
- High density COB with uniform lighting distribution.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee
- Indoor use only

Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
ST512-WHTC3W	9360338003229	3W	62-73lm	H35.4*Ø55mm	Ø45mm	WH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST512-BKTC3W	9360338003236	3W	62-73lm	H35.4*Ø55mm	Ø45mm	BK	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST512-SCTC3W	9360338003243	3W	62-73lm	H35.4*Ø55mm	Ø45mm	SCH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST513-WHTC3W	9360338003250	3W	27-36lm	H35.4*Ø55mm	Ø45mm	WH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST513-BKTC3W	9360338003267	3W	27-36lm	H35.4*Ø55mm	Ø45mm	BK	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST513-SCTC3W	9360338003274	3W	27-36lm	H35.4*Ø55mm	Ø45mm	SCH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST514-WHTC3W	9360338003281	3W	66-78lm	H35.4*Ø55mm	Ø45mm	WH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST514-BKTC3W	9360338003298	3W	66-78lm	H35.4*Ø55mm	Ø45mm	BK	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST514-SCTC3W	9360338003304	3W	66-78lm	H35.4*Ø55mm	Ø45mm	SCH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST518-WHTC3W	9360338003403	3W	62-79lm	H35.4*Ø55mm	Ø45mm	WH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST518-BKTC3W	9360338003410	3W	62-79lm	H35.4*Ø55mm	Ø45mm	BK	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST518-SCTC3W	9360338003427	3W	62-79lm	H35.4*Ø55mm	Ø45mm	SCH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm

LED STEP LIGHT SERIES

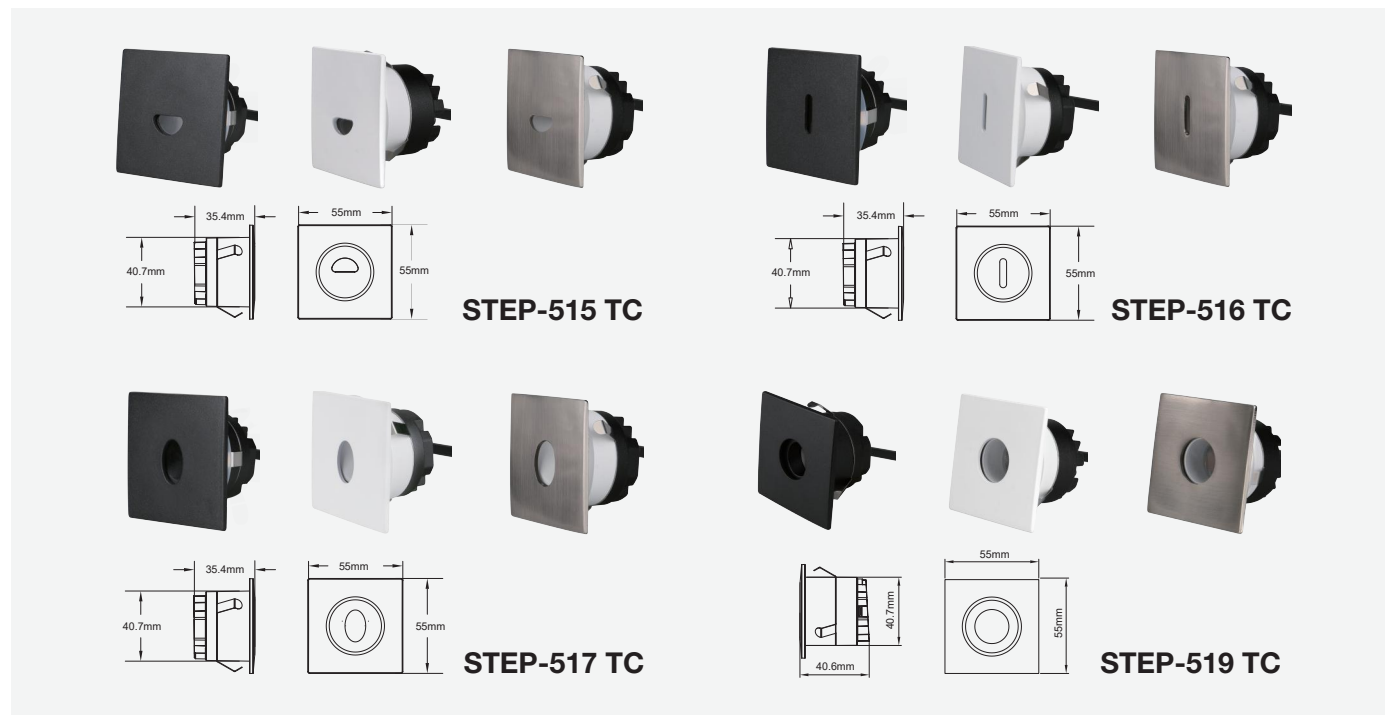


Product Features

- Made of die-casting, powder coating finish from AkzoNobel.
- Interchangeable faceplate with magnetic design.
- High density COB with uniform lighting distribution.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee
- Indoor use only


Technical Specification

Model	Barcode	W	lm	Size	Cutout	Color	Material	Beam Angle	CCT	Packaging	Dimensions
ST515-WHTC3W	9360338003311	3W	62-73lm	L55*D55*H35.4mm	45mm	WH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST515-BKTC3W	9360338003328	3W	62-73lm	L55*D55*H35.4mm	45mm	BK	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST515-SCTC3W	9360338003335	3W	62-73lm	L55*D55*H35.4mm	45mm	SCH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST516-WHTC3W	9360338003342	3W	27-36lm	L55*D55*H35.4mm	45mm	WH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST516-BKTC3W	9360338003359	3W	27-36lm	L55*D55*H35.4mm	45mm	BK	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST516-SCTC3W	9360338003366	3W	27-36lm	L55*D55*H35.4mm	45mm	SCH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST517-WHTC3W	9360338003373	3W	66-78lm	L55*D55*H35.4mm	45mm	WH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST517-BKTC3W	9360338003380	3W	66-78lm	L55*D55*H35.4mm	45mm	BK	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST517-SCTC3W	9360338003397	3W	66-78lm	L55*D55*H35.4mm	45mm	SCH	Die-cat Aluminum	20°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST519-WHTC3W	9360338003434	3W	62-79lm	L55*D55*H35.4mm	45mm	WH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST519-BKTC3W	9360338003441	3W	62-79lm	L55*D55*H35.4mm	45mm	BK	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm
ST519-SCTC3W	9360338003458	3W	62-79lm	L55*D55*H35.4mm	45mm	SCH	Die-cat Aluminum	15°	3000K/4000K/5000K	50 PCS/CTN	340*340*240mm

Outdoor Use 3color in One LED Step Light

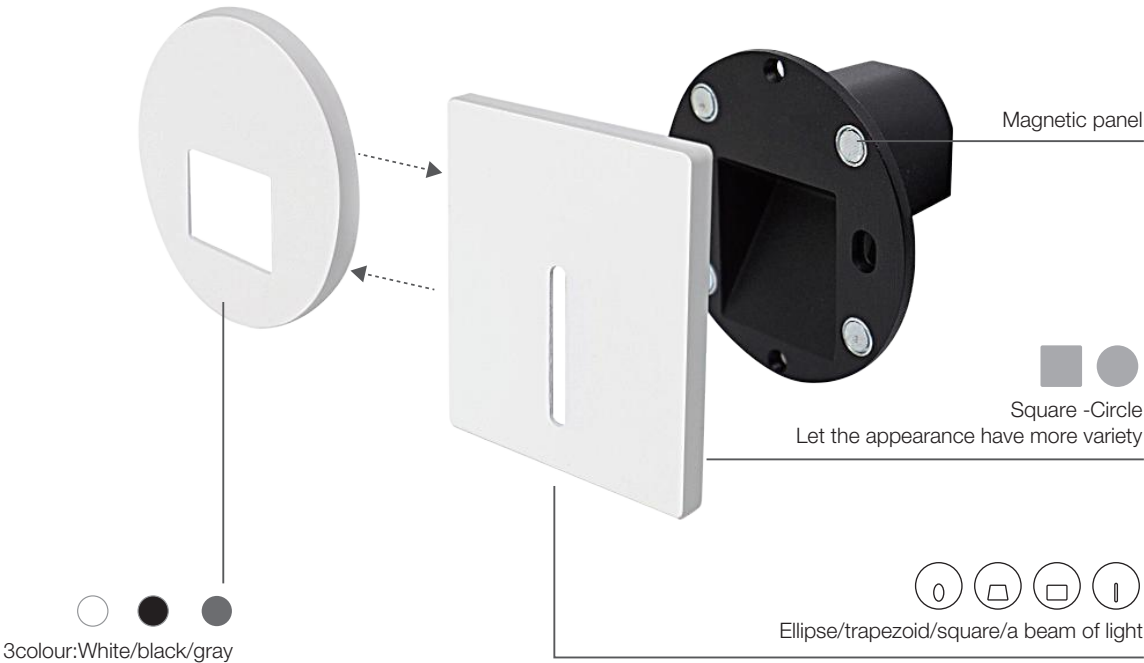

LED STEP LIGHT SERIES

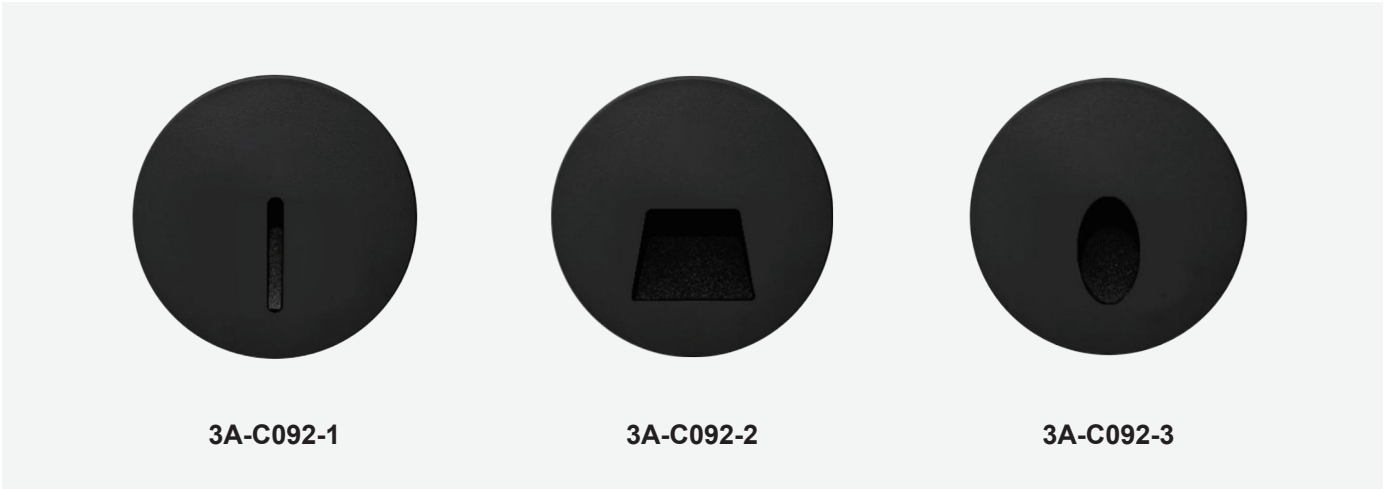

White

Black

Gray


AC85-265V
or
DC12V

CRI 90

IP65

3000K
4000K
6000K
CCT TUNABLE


3 years

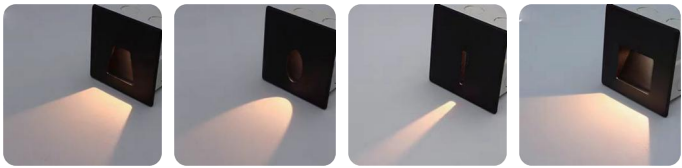

Product Features

- Outdoor Use 3color in One LED Step Light
- 2Panel shape 4Light outlet 3colour
- Square -Circle
- IP65 class · Outdoor waterproof

Dimensions

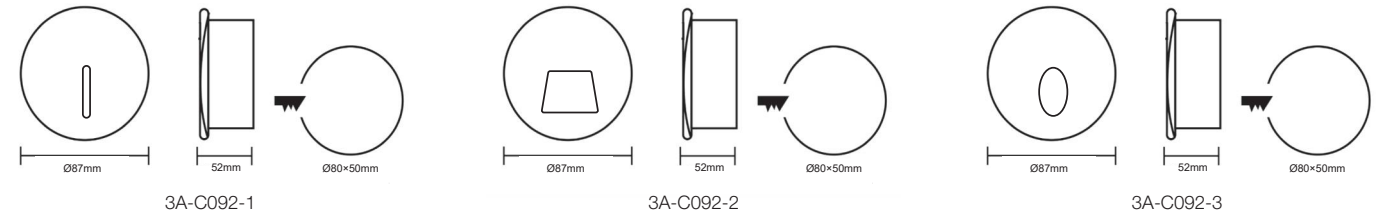


Technical Specification


Model	W	Input	Size	Color		CCT	Temp	N.W
3A-C092-1-12V	3W	DC12V	L86*W86*H40mm	White/black/gray	20°	3000K/4000K/6000K	-20°C~+45°C	0.2kg
3A-C092-1-240V	3W	AC85-265V	L86*W86*H40mm	White/black/gray	20°	3000K/4000K/6000K	-20°C~+45°C	0.2kg
3A-C092-2-12V	3W	DC12V	L86*W86*H40mm	White/black/gray	90°	3000K/4000K/6000K	-20°C~+45°C	0.2kg
3A-C092-2-240V	3W	AC85-265V	L86*W86*H40mm	White/black/gray	90°	3000K/4000K/6000K	-20°C~+45°C	0.2kg
3A-C092-3-12V	3W	DC12V	L86*W86*H40mm	White/black/gray	20°	3000K/4000K/6000K	-20°C~+45°C	0.2kg
3A-C092-3-240V	3W	AC85-265V	L86*W86*H40mm	White/black/gray	20°	3000K/4000K/6000K	-20°C~+45°C	0.2kg

Accessories



Colour




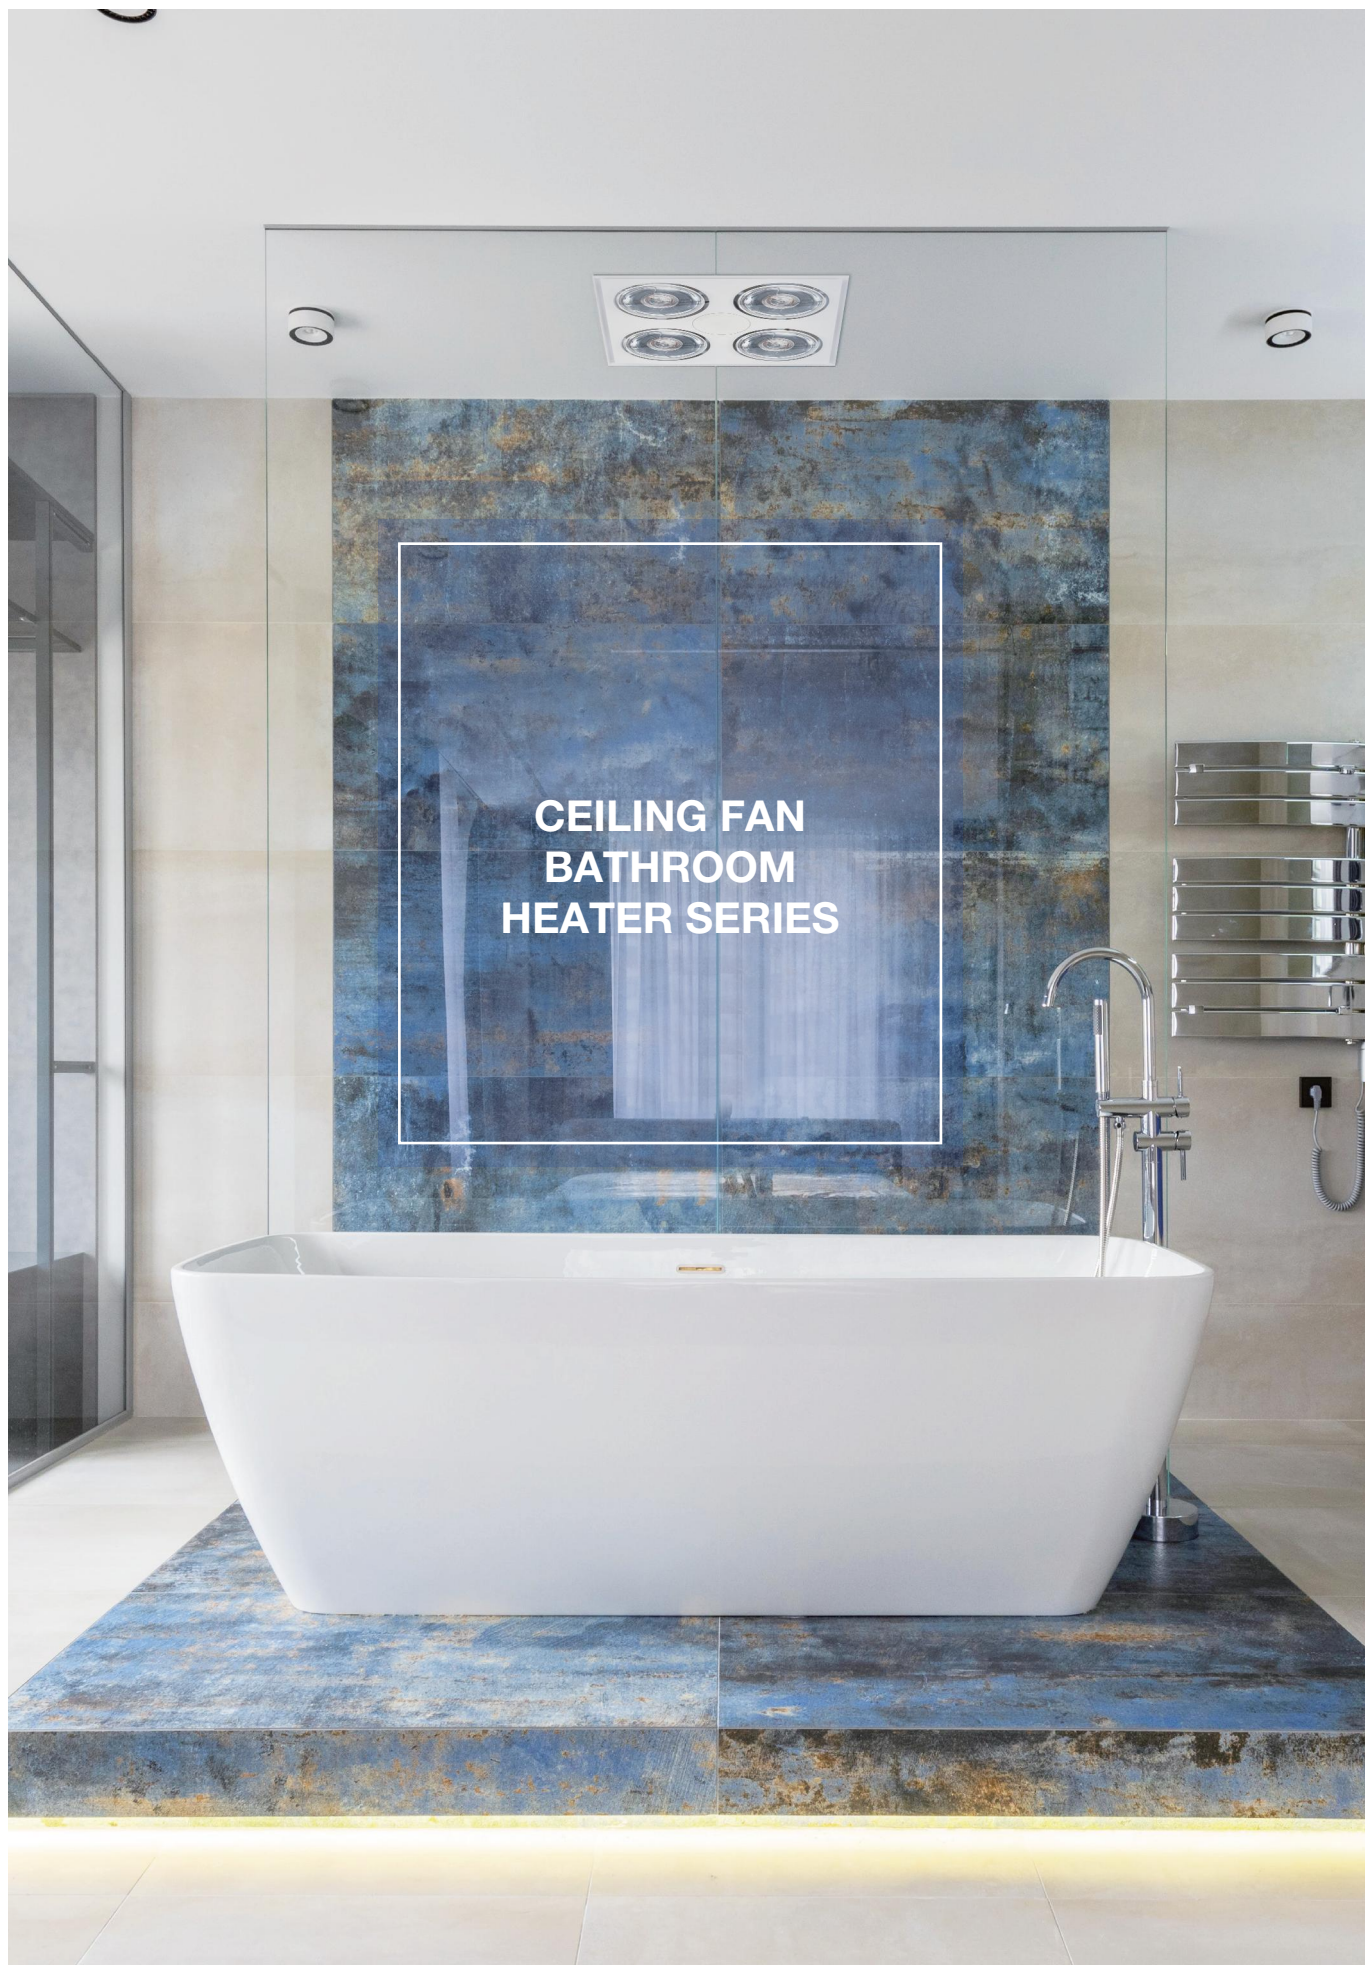


CEILING FAN BATHROOM HEATER SERIES

**Product Features**

- Compatible with all 3A Ceiling Fan
- One to one control
- Fast learning function
- 4 timer delay off, 3-Speed options
- Coming with remote control holder
- 12 months replacement warranty

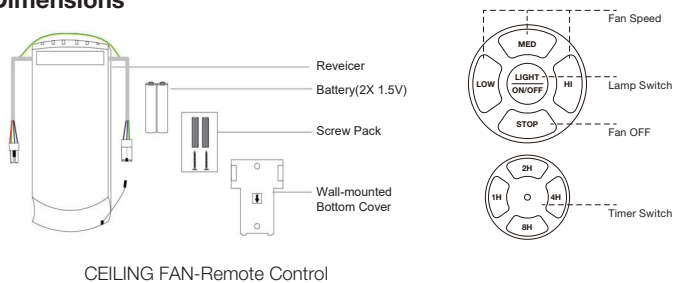Dimensions

Receiver can be controlled by any angles of the emitter in prescriptive space

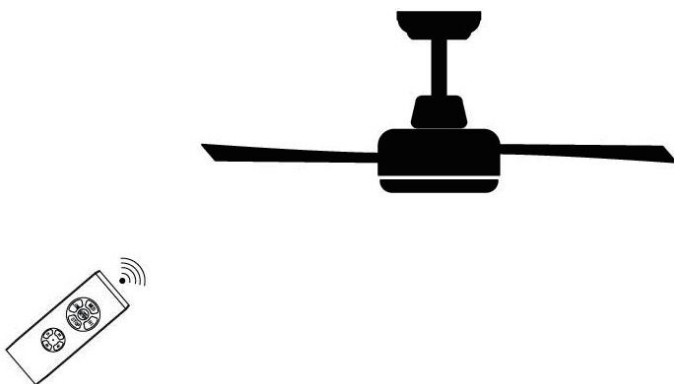

BATHROOM HEATER SECTION



3AH2E125D10



3AH4E125D10



White



AC
185-265V



IPX4

2
years



Product Features

- Low profile 3 in 1 bathroom heater with 10w built in downlight.
- 45W Motor,290m3/h airflow
- 2 x 275W durable heat lamps for instant heating included
- 2 Years In Home Warranty

Dimensions



3AH2E125D10



3AH4E125D10

Technical Specification

Model	Barcode	W	lm	Heat Lamp	Motor	Airflow	Noise	Outlet	Cutout	Color	Control	Material	CCT		
3AH2E125D10	9360338006718	605W	900lm	2*275W	45W	290m³/h	42dB	125mm	375*202mm	WH	Wall switch	Aluminum	4000K	4 PCS/CTN	590*550*615mm
3AH4E125D10	9360338006725	1155W	900lm	4*275W	45W	290m³/h	42dB	125mm	320*320mm	WH	Wall switch	Aluminum	4000K	2 PCS/CTN	535*435*640mm

BATHROOM HEATER SECTION




White Chrome



Product Features

- 3 in1 bathroom heater,ball bearing motor
- 250m3/h airflow,10cm grill,10x10*3M aluminum ducting
- 275W durable heat lamp for instant heating included
- Duct,Exterior vent and 3 Gang switches included
- 2 year Replacment Warranty

Dimensions

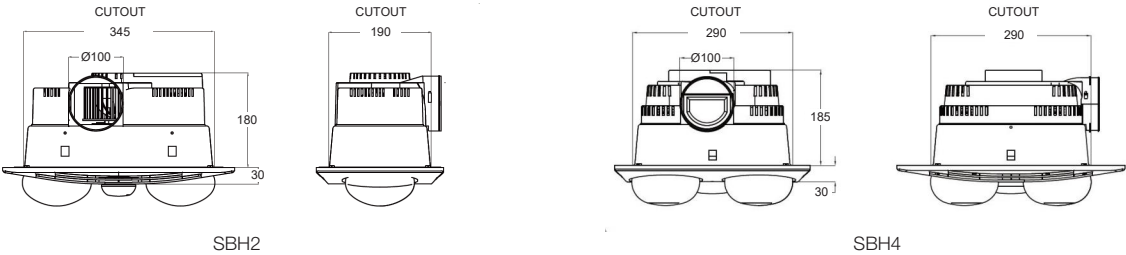

Technical Specification

Model	Barcode	W	lm	Heat Lamp	Light Source	Airflow	Outlet	Cutout	Color	Grill Size	Material	Depth		
SBH2-WH	9360338006626	557W	630lm	2*275W	R63 7W	250m ³ /h	Ø100	345*190mm	WH/SCH	400*350mm	Aluminum	210mm	4 PCS/CTN	590*550*615mm
SBH4-WH	9360338006633	1111W	950lm	4*275W	R80 11W	250m ³ /h	Ø100	290*290mm	WH/SCH	420*360mm	Aluminum	210mm	2 PCS/CTN	535*435*640mm


EXHAUST FAN SECTION



Product Features

- Elegant design, ideal for bathrooms, toilet or kitchens
- Side ducted with draft stopper, power cord included
- Turbo fan blade, air extraction up to 270m³/hr, 30W motor
- 2 Years Replacement Warranty

Dimensions

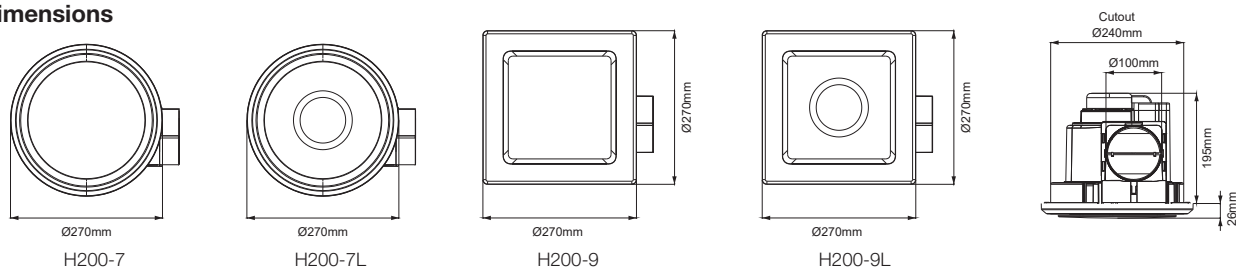

Technical Specification

Model	Barcode	lm	Air Extraction	Light Source	Outlet	Cutout	Color	Grill Size	Depth		
H200-7-WH	9360338006640	N/A	270m ³ /h	N/A	Ø100	Ø240	WH/SIL/BK	Ø270mm	221mm	4 PCS/CTN	605*504*350mm
H200-7L-WH	9360338006657	900lm	270m ³ /h	10W LED	Ø100	Ø240	WH/SIL/BK	Ø270mm	221mm	4 PCS/CTN	605*504*350mm
H200-9-WH	9360338006664	N/A	270m ³ /h	N/A	Ø100	240x240mm	WH/SIL/BK	270*270mm	221mm	4 PCS/CTN	605*504*350mm
H200-9L-WH	9360338006671	900lm	270m ³ /h	10W LED	Ø100	240x240mm	WH/SIL/BK	270*270mm	221mm	4 PCS/CTN	605*504*350mm


EXHAUST FAN SECTION



Product Features

- Elegant design,ideal for bathrooms,toilet or kitchens
- Side ducted with draft stopper,power cord included
- Turbo fan blade,air extraction up to 320m3/hr,35W motor
- 2 Years Replacement Warranty


Dimensions

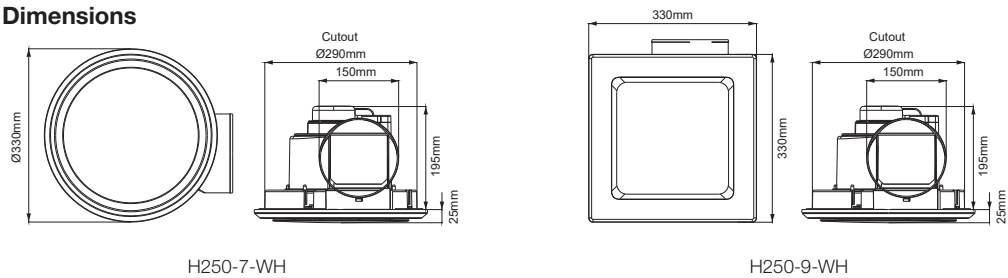

Technical Specification

Model	Barcode	W	lm	Air Extraction	Light Source	Outlet	Cutout	Color	Grill Size	Depth		
H250-7-WH	9360338006688	35W	N/A	320m ³ /h	N/A	Ø150	Ø290	WH/SIL/BK	Ø330mm	225mm	4 PCS/CTN	605*504*350mm
H250-9-WH	9360338006701	35W	N/A	320m ³ /h	N/A	Ø150	290*290mm	WH/SIL/BK	330*330mm	225mm	4 PCS/CTN	605*504*350mm


EXHAUST FAN SECTION

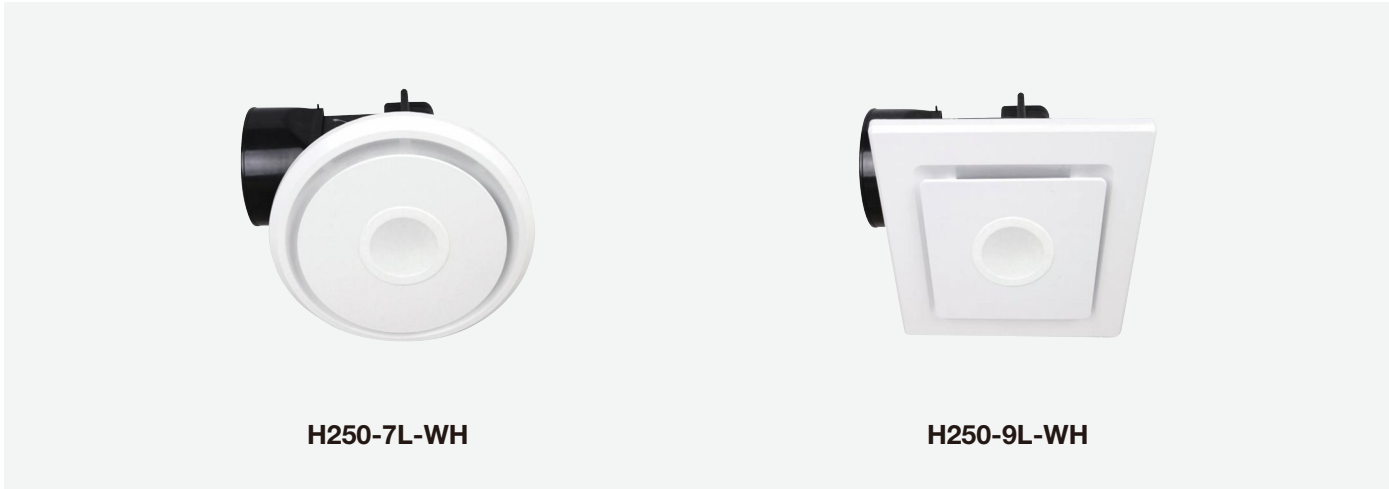

Product Features

- Elegant design, ideal for bathrooms, toilet or kitchens
- Side ducted with draft stopper, power cord included
- Turbo fan blade, air extraction up to 320m³/hr, 35W motor
- 2 Years Replacement Warranty

Dimensions

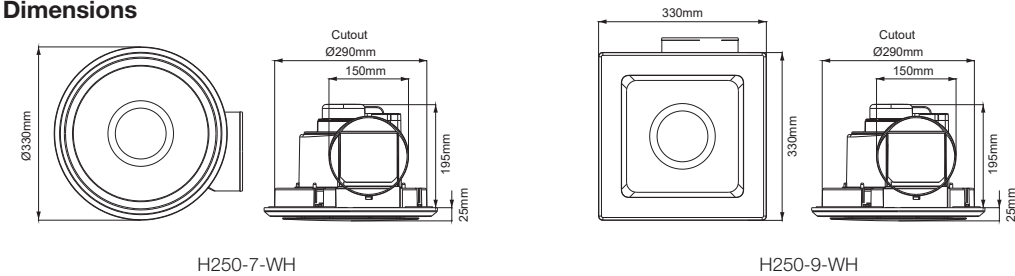

Technical Specification

Model	Barcode	W	lm	Air Extraction	Light Source	Outlet	Cutout	Color	Grill Size	Depth		
H250-7L-WH	9360338006695	35W	900lm	320m ³ /h	10W LED	Ø150	Ø290	WH/SIL/BK	Ø330mm	225mm	4 PCS/CTN	605*504*350mm
H250-9L-WH	9360338007197	35W	900lm	320m ³ /h	10W LED	Ø150	290*290mm	WH/SIL/BK	330*330mm	225mm	4 PCS/CTN	605*504*350mm


EXHAUST FAN SECTION



Product Features

- High Efficiency and Low Noise Moisture-proof and Dehumidification
- Fully Enclosed Side Ducted Exhaust
- To Create a Comfortable and Fresh Enviroment
- 2 Years Replacement Warranty

Dimensions

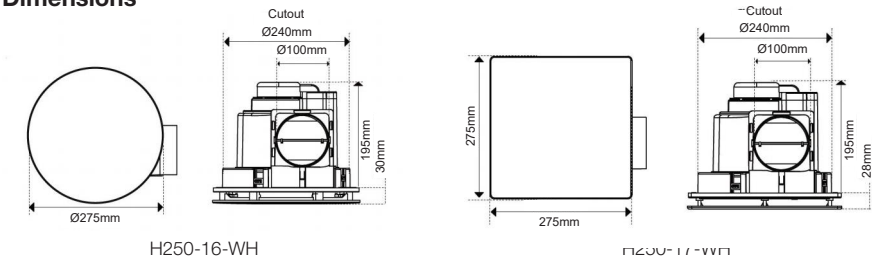

Technical Specification

Model	Barcode	W	lm	Air Extraction	Light Source	Outlet	Cutout	Color	Grill Size	Depth		
H200-16-WH	9360338007203	30W	N/A	270m³/h	N/A	Ø100	Ø240	WH	Ø275mm	195mm	4 PCS/CTN	400*530*360mm
H200-17-WH	9360338007227	30W	N/A	270m³/h	N/A	Ø100	Ø240	WH	Ø275mm	195mm	4 PCS/CTN	400*530*360mm

EXHAUST FAN SECTION



H250-16-WH

H250-17-WH




White




Product Features

- High Efficiency and Low Noise Moisture-proof and Dehumidification
- Fully Enclosed Side Ducted Exhaust
- To Create a Comfortable and Fresh Enviroment
- 2 Years Replacement Warranty

Dimensions

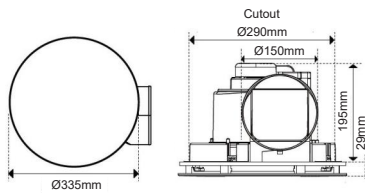

H250-16-WH

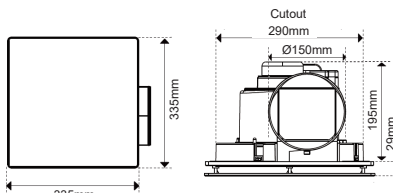

H250-17-WH

Technical Specification

Model	Barcode	W	lm	Air Extraction	Light Source	Outlet	Cutout	Color	Grill Size	Depth		
H250-16-WH	9360338007210	35W	N/A	320m³/h	N/A	Ø150	Ø290	WH	Ø335mm	195mm	4 PCS/CTN	795*555*410mm
H250-17-WH	9360338007234	35W	N/A	320m³/h	N/A	Ø150	Ø290	WH	Ø335mm	195mm	4 PCS/CTN	795*555*410mm

EXHAUST FAN SECTION




White



Product Features

- 275W heat lamp
- Easy installation with string clamps
- Rigid metal body
- Coming with easy plug-in 1.5 cord lengthh
- 2 Year replacment warranty

Dimensions

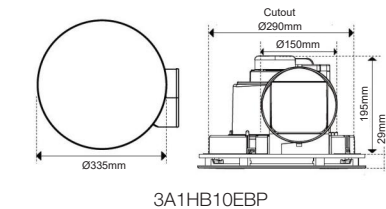

Technical Specification

Model	W	Size	Cutout	Color	Material			KG
3A1HB10EBP	275W	Ø175*H194mm	Ø160mm	WH	Die-cat Aluminum	12 PCS/CTN	570*380*455mm	10.08KGS

EXHAUST FAN SECTION




White



Product Features

- Elegant design
- Rated voltage AC220-240V,50Hz
- Ideal for bathrooms,toilets of kitchens
- Side ducted with draft stopper
- Turbo fan blade,power cord included
- Longlife ball bearing motor
- Air extraction up to 270m3/hr(H200-15L)320 m3/hr(H250-15L)
- Max 14W LED(H200-15L),17W for H250-15L

Dimensions

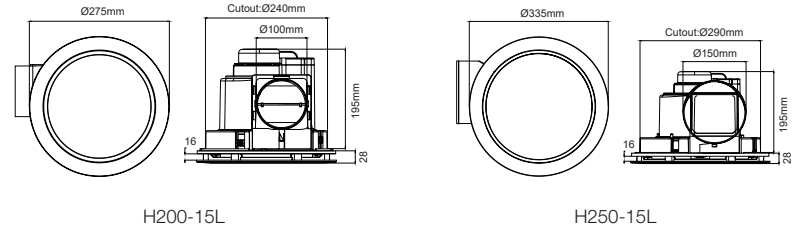

Technical Specification

Model	Barcode	W	lm	Light Source	Air Extraction	Duct Outlet Size	Grill Size	Cutout	Color	Depth	Material		
H200-15L	9360338010623	30W	900lm	14W	270m³/h	Ø100mm	Ø275mm	Ø240mm	WH	195mm	Aluminum	4 PCS/CTN	640*530*360mm
H250-15L	9360338010630	40W	1200lm	17W	320m³/h	Ø150mm	Ø335mm	Ø290mm	WH	195mm	Aluminum	4 PCS/CTN	760*540*410mm




CEILING FAN SERIES



Product Features

- 1320mm 4 blades ceiling fan
- Powerful & efficient 65W AC motor
- Remote control adaptable(sold separately)
- 12.5° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 3 Years In Home Warranty

Dimensions

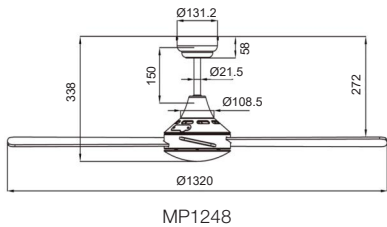

Technical Specification

Model	Barcode	W	Blades	Color	With Light	DIA			
MP1248-WH-4	9360338006732	65W	4	WH	NO	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5
MP1248-BK-4	9360338006756	65W	4	BK	NO	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5
MP1248-SL-4	9360338006749	65W	4	SR	NO	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5


CEILING FAN SERIES



Product Features

- 1320mm 4 blades ceiling fan
- Powerful & efficient 65W AC motor
- Remote control adaptable(sold separately)
- 12.5° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 3 Years In Home Warranty

Dimensions

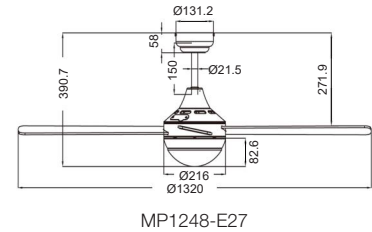

Technical Specification

Model	Barcode	W	Blades	Color	With Light	DIA			
MP1248-E27-WH-4	9360338006763	65W	4	WH	E27 Lampholder(Lamp not included)	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5
MP1248-E27-BK-4	9360338006787	65W	4	BK	E27 Lampholder(Lamp not included)	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5
MP1248-E27-SL-4	9360338006770	65W	4	SR	E27 Lampholder(Lamp not included)	52"	12.5°	1 PCS/CTN	L61*W30.6*H32.5


CEILING FAN SERIES



Product Features

- 1320mm 4 blades ceiling fan
- Powerful & efficient 65W AC motor
- Remote control adaptable(sold separately)
- 12.5° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 3 Years In Home Warranty

Dimensions

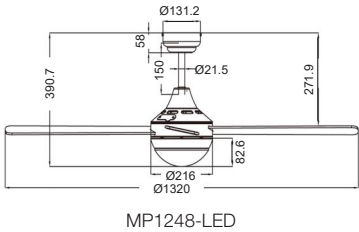

Technical Specification

Model	Barcode	W	lm	Blades	Color	With Light	DIA		CCT		
MP1248-LED-WH-4	9360338006794	65W	1650lm/1700lm/1750lm	4	WH	YES(Built in LED)	52"	12.5°	3000K/4000K/6500K	1 PCS/CTN	L61*W30.6*H32.5
MP1248-LED-BK-4	9360338006817	65W	1650lm/1700lm/1750lm	4	BK	YES(Built in LED)	52"	12.5°	3000K/4000K/6500K	1 PCS/CTN	L61*W30.6*H32.5
MP1248-LED-SL-4	9360338006800	65W	1650lm/1700lm/1750lm	4	SR	YES(Built in LED)	52"	12.5°	3000K/4000K/6500K	1 PCS/CTN	L61*W30.6*H32.5

CEILING FAN SERIES




Product Features

- Materials:ABS blades+full copper DC motor+Iron fan body
- Finish option:All white/All black
- Extension Rod:5inch&10inch included
- Function:6 fan speed+time-delay switch+reversal fan+natural wind+Tri-color changing 3000K/4500K/6500K+dimming+Tuya
- Warranty:6 years motor+3years in home
- Remote control included

Applications


- Home,Shop,Restaurant and office etc

Dimensions

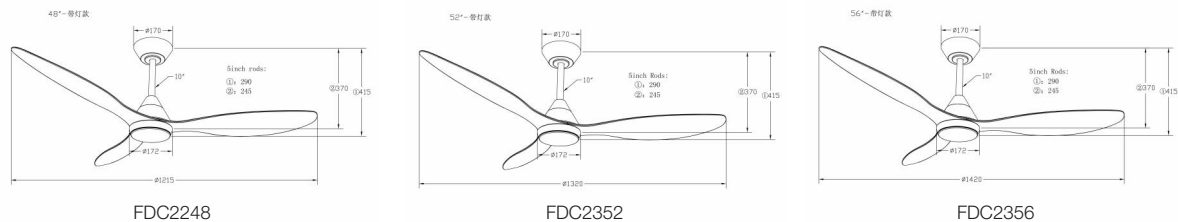

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Angle	CCT	Speed	RPM	Airflow (M3/H)
FDC2248-WH-3	9360338010913	18W	1800lm	48inch(1220mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	200	10500
FDC2248-BK-3	9360338010920	18W	1800lm	48inch(1220mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	200	10500
FDC2248-LED-WH-3	9360338010937	18W	1800lm	48inch(1220mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	200	10500
FDC2248-LED-BK-3	9360338010944	18W	1800lm	48inch(1220mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	200	10500
FDC2352-WH-3	9360338010951	18W	1800lm	52inch(1320mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	180	12080
FDC2352-BK-3	9360338010968	18W	1800lm	52inch(1320mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	180	12080
FDC2352-LED-WH-3	9360338010975	18W	1800lm	52inch(1320mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	180	12080
FDC2352-LED-BK-3	9360338010982	18W	1800lm	52inch(1320mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	180	12080
FDC2356-WH-3	9360338010999	18W	1800lm	56inch(1422mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	165	13050
FDC2356-BK-3	9360338011002	18W	1800lm	56inch(1422mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	165	13050
FDC2356-LED-WH-3	9360338011019	18W	1800lm	56inch(1422mm)	WH	Aluminum	100°	3000K/4500K/6500K	6	165	13050
FDC2356-LED-BK-3	9360338011026	18W	1800lm	56inch(1422mm)	BK	Aluminum	100°	3000K/4500K/6500K	6	165	13050

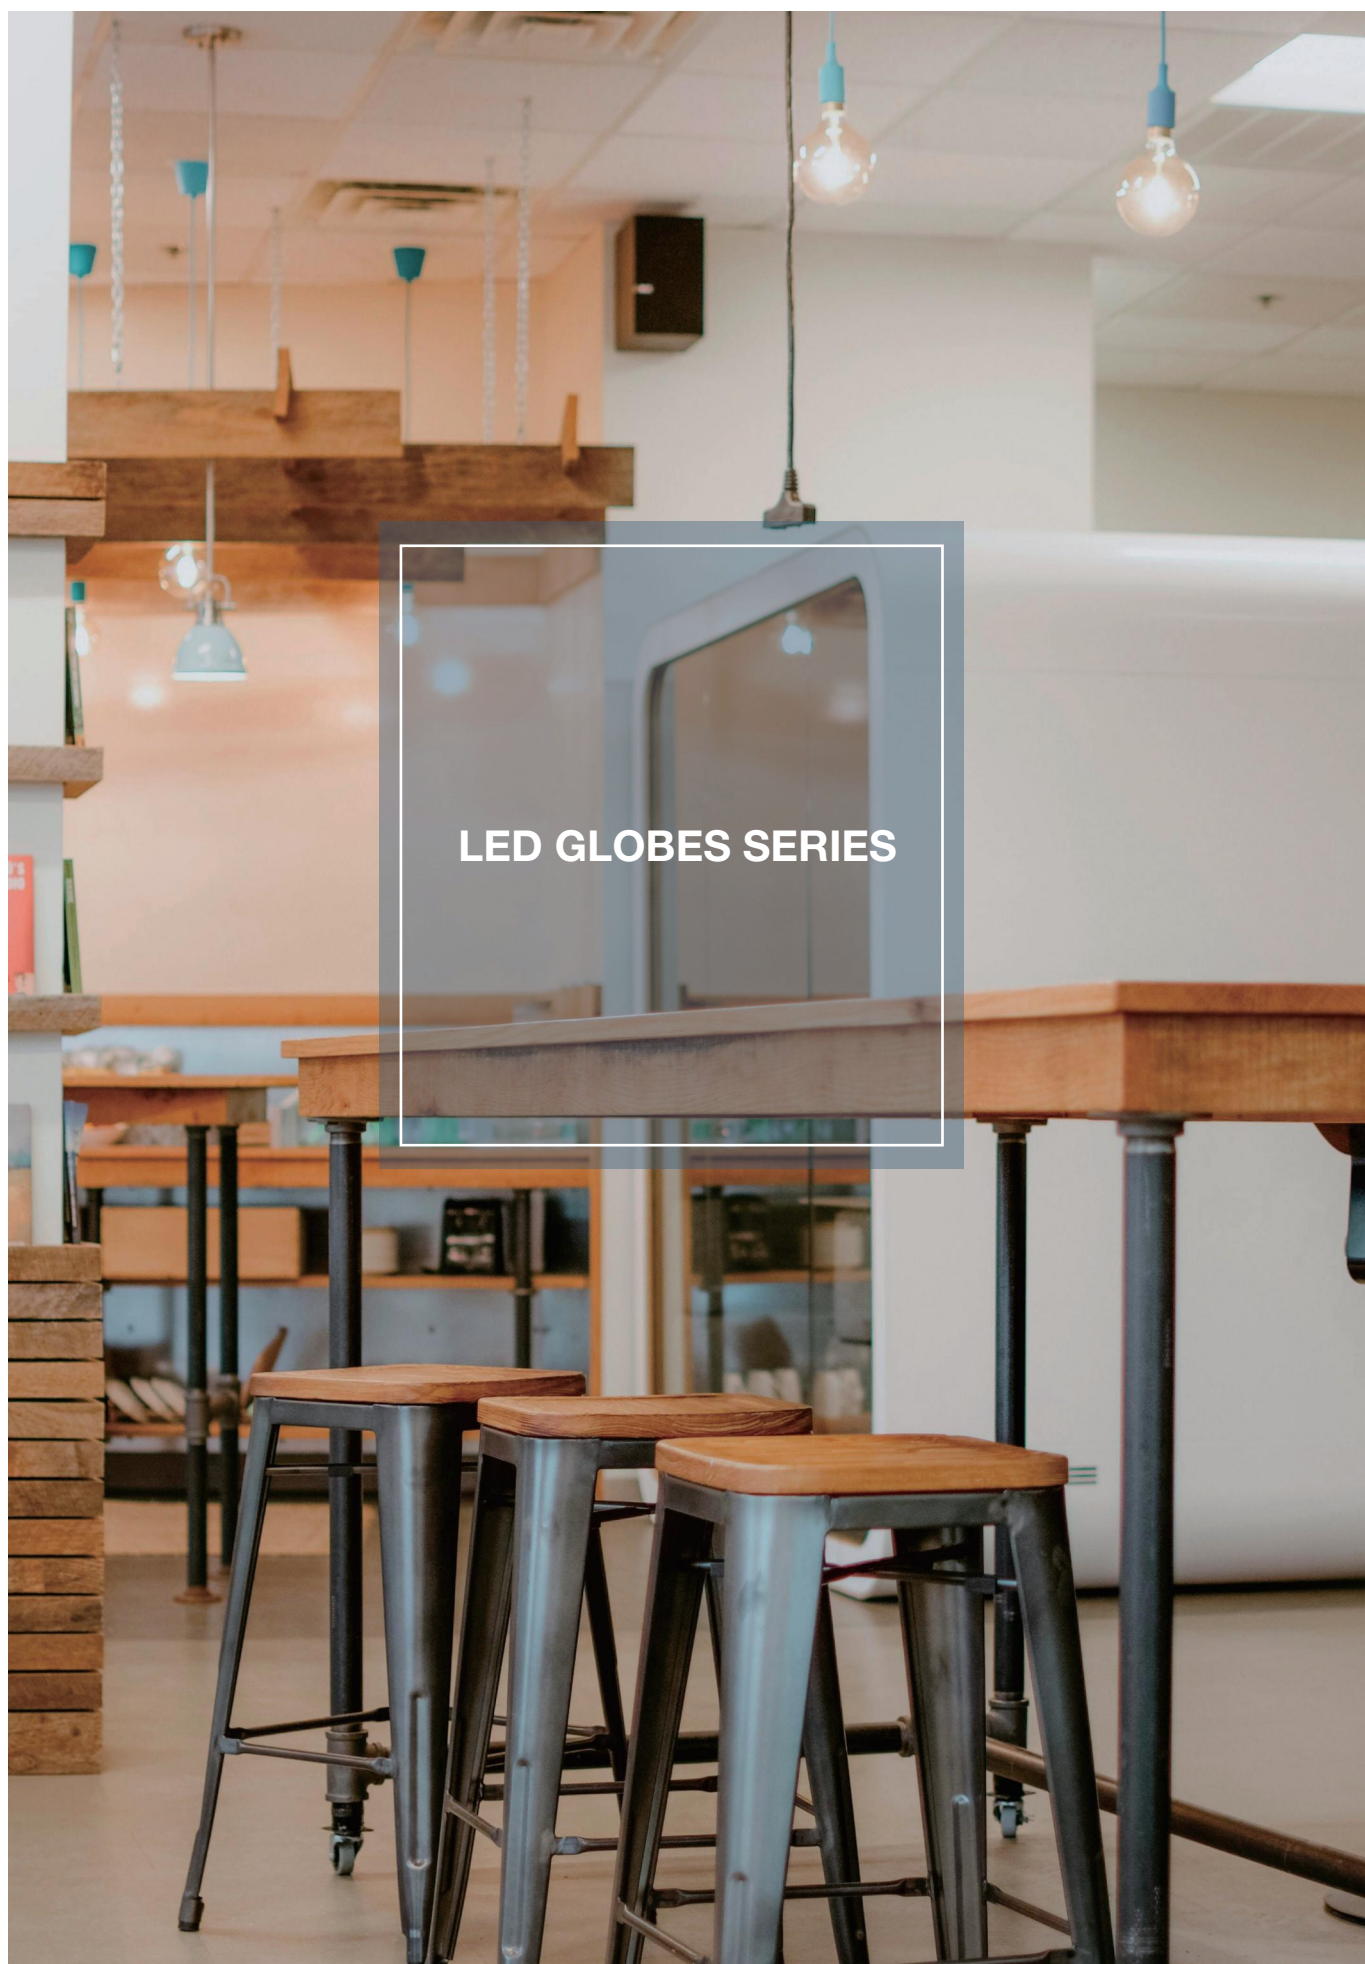


LED GLOBES SECTION



White

- Product Features**
- GU10 Base
 - Tri-colour WW/CW/DL
 - Dual Wattage 8W & 4W
 - Triac Dimming and Flicker Free
 - No UV and IR radiation
 - Indoor Lighting only
 - 60° beam angle
 - Long life-span with low power consumption



Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Box	Box Size
GU10-WHTCDP0408	9360338006930	Dual Wattage 4W-8W	450-650lm	Ø50*56mm	WH	Aluminum+PC	60°	3000K/4000K/5000K	100 PCS/CTN	265*265*280mm



LED GLOBES SECTION



LED-A60-11W




LED-A60-11W-TC



LED-T40-9W




White




Product Features

- Low energy consumption
- Low maintenance cost
- Low thermal output
- Shockproof and vibration proof
- Replace incandescent lamp


Dimensions



LED-A60-11W



LED-A60-11W-TC



LED-A40-9W

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
A60B22-WH6500K11W	9360338005513	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60B22-WH4000K11W	9360338005520	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60B22-WH3000K11W	9360338005537	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60E27-WH6500K11W	9360338005544	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60E27-WH4000K11W	9360338005551	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60E27-WH3000K11W	9360338005568	11W	1050lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	650*330*H250mm
A60B22-WHTC11W	9360338008286	11W	1100lm-1250lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6500K	100 PCS/CTN	650*330*H250mm
A60E27-WHTC11W	9360338008293	11W	1100lm-1250lm	Ø60*H112mm	WH	Die-cat Aluminum	3000K/4000K/6500K	100 PCS/CTN	650*330*H250mm
T40B22-WH3000K9W	9360338005575	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm
T40B22-WH4000K9W	9360338005582	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm
T40B22-WH6400K9W	9360338005599	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm
T40E27-WH3000K9W	9360338005605	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm
T40E27-WH4000K9W	9360338005612	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm
T40E27-WH6400K9W	9360338005629	9W	850lm	Ø40*H107mm	WH	Die-cat Aluminum	3000K/4000K/6400K	100 PCS/CTN	450*230*H250mm

LED GLOBES SECTION






White



Product Features

- With latest LED technology
- GU10/MR16 base nomal size
- 38° beam angle
- Replace halogen lamp
- Long life AVERAGE 50,000 hours

Dimensions

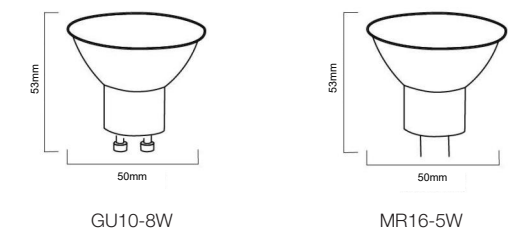

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	Base		
GU10-8W3000K	9360338005483	8W	720lm	Ø50*H53mm	WH	Die-cat Aluminum	38°	3000K/4000K/6500K	GU10	100 PCS/CTN	545*275*H140mm
GU10-8W4000K	9360338005490	8W	720lm	Ø50*H53mm	WH	Die-cat Aluminum	38°	3000K/4000K/6500K	GU10	100 PCS/CTN	545*275*H140mm
GU10-8W6500K	9360338005506	8W	720lm	Ø50*H53mm	WH	Die-cat Aluminum	38°	3000K/4000K/6500K	GU10	100 PCS/CTN	545*275*H140mm
MR16-5W6500K	9360338005469	5W	400lm	Ø50*H53mm	WH	Die-cat Aluminum	38°	3000K/6500K	GU10	100 PCS/CTN	545*280*H135mm
MR16-5W3000K	9360338005476	5W	400lm	Ø50*H53mm	WH	Die-cat Aluminum	38°	3000K/6500K	GU10	100 PCS/CTN	545*280*H135mm

LED GLOBES SECTION



 White




Product Features

- Low energy consumption
- Good quality of light,consistent chromaticity
- Compact design,easy replacement of classic lamps
- Instant 100% light,no warm-up time
- Color temp:W/CCT/RGBW/RGB+CCT
- App control from anywhere at anytime,to adjust color,brightness,set time,and show different scenes
- Support voice control
- Wifi Connected (2.4GHz)

Applications

- Residential area
- Commercial areas: - e.g. Reception areas, hotels and shops

Dimensions



GLOBE/ SMART A60/9W

Technical Specification

Model	Barcode	W	lm	Size	Color	Material		CCT	Base		
A60B22-WHSMART11W	9360338005650	9W	806lm	Ø60*H111.5mm	WH	Die-cat Aluminum	220°	3000K/6500K	B22	100 PCS/CTN	270*270*330mm
A60E27-WHSMART11W	9360338005667	9W	806lm	Ø60*H113mm	WH	Die-cat Aluminum	220°	3000K/6500K	E27	100 PCS/CTN	270*270*330mm

LED GLOBES SECTION



GLOBE/ SMART 5W GU10 RGB CCT



White




Product Features

- Low energy consumption
- Good quality of light,consistent chromaticity
- Compact design,easy replacement of classic lamps
- Instant 100% light,no warm-up time
- Color temp:W/CCT/RGBW/RGB+CCT
- App control from anywhere at anytime,to adjust color,brightness,set time,and show different scenes
- Support voice control
- Wifi Connected

Applications

- Residential area
- Commercial areas: - e.g. Reception areas, hotels and shops

Dimensions



GLOBE/ SMART 5W GU10 RGB CCT

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam	CCT	Base	Quantity	Dimensions
-------	---------	---	----	------	-------	----------	------	-----	------	----------	------------

GLOBE/ SMART 5W GU10 RGB CCT9360338005643 5.5W 470lm Ø50*H56mm WH Die-cat Aluminum 96° 2700K-6500K GU10 100 PCS/CTN 575*575*160mm

LED GLOBES SECTION



PAR20 7W



PAR30 9W



PAR38 18W




White




Product Features

- High lumen output LED
- Built in LED driver
- 38° beam angle
- Average lifespan up to 30,000 hours


Dimensions



PAR20 7W



PAR30 9W




PAR38 18W

Technical Specification

Model	Barcode	W	lm	Size	Color	IP	Material	Beam Angle	CCT	Base	Packaging	Dimensions
PAR20 7W 3000K	9360338005674	7W	650lm	Ø63*H82mm	WH	IP65	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	350*350*H210mm
PAR20 7W 5500K	9360338005681	7W	650lm	Ø63*H82mm	WH	IP65	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	350*350*H210mm
PAR30 9W 3000K	9360338005698	9W	807lm	Ø95*H98mm	WH	IP65	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	510*510*H230mm
PAR30 9W 5500K	9360338005704	9W	807lm	Ø95*H98mm	WH	IP65	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	510*510*H230mm
PAR38 15W 3000K	9360338005711	15W	1500lm	Ø121*H132mm	WH	IP44	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	635*535*H300mm
PAR38 15W 5500K	9360338005728	15W	1500lm	Ø121*H132mm	WH	IP44	Die-cat Aluminum	38°	3000K/5500K	E27	50 PCS/CTN	635*535*H300mm

LED GLOBES SECTION

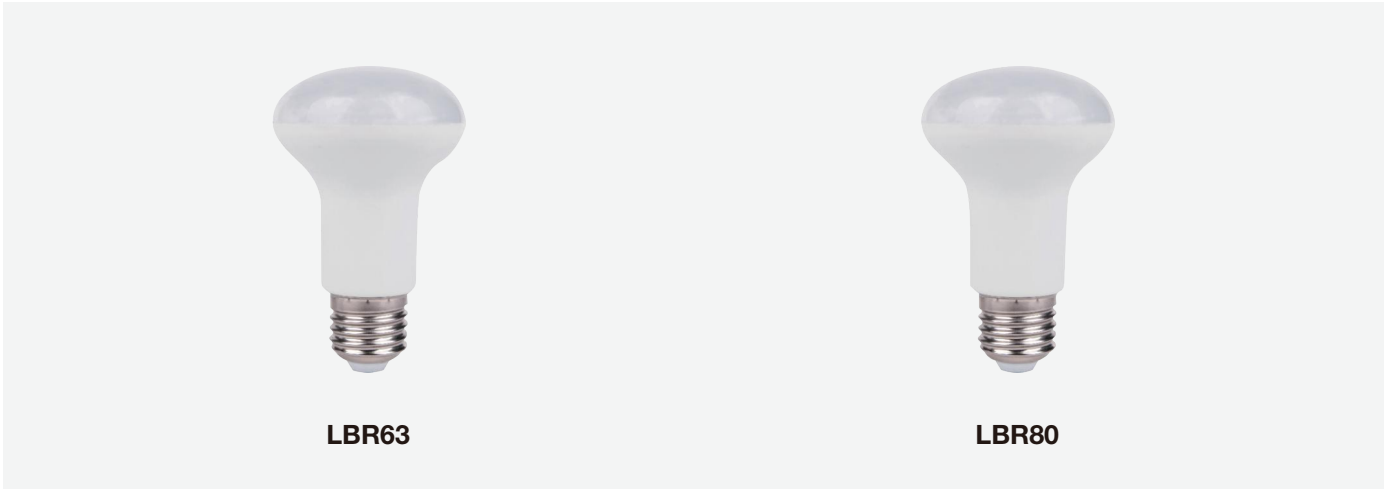


White

Product Features

- Low energy consumption
- Low maintenance cost
- Low thermal output

Dimensions

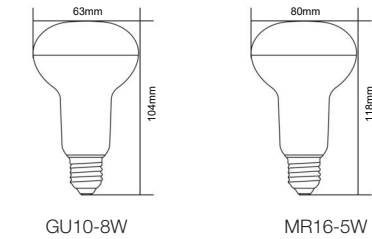

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT	Base		
LBR63-E273000K	9360338007241	7W	630lm	Ø63*H104mm	WH	Die-cat Aluminum	3000K/5500K	E27	50 PCS/CTN	335*335*H230mm
LBR80-E273000K	9360338007258	11W	950lm	Ø80*H120mm	WH	Die-cat Aluminum	3000K/5500K	E27	50 PCS/CTN	420*420*H265mm

LED GLOBES SECTION



HEAT LAMP 275W



Product Features

- Infra red heat lamps for bathroom heaters
- Instant heat, energy efficiency
- Anti-blast hard glass for better durability
- Long life up to 5000 Hours
- Strict 4°C water splash test for better safety

Applications

- Ceiling insert bulb heater
- Other applicarions requiring fast, efficient heating

Dimensions




HEAT LAMP 275W

Technical Specification

Model	Barcode	W	Size	Color	Material	Base		
HEAT LAMP 275W	9360338005735	275W	Ø125*H180mm	WH	Die-cat Aluminum	E27	20 PCS/CTN	655*270*400mm

LED GLOBES SECTION

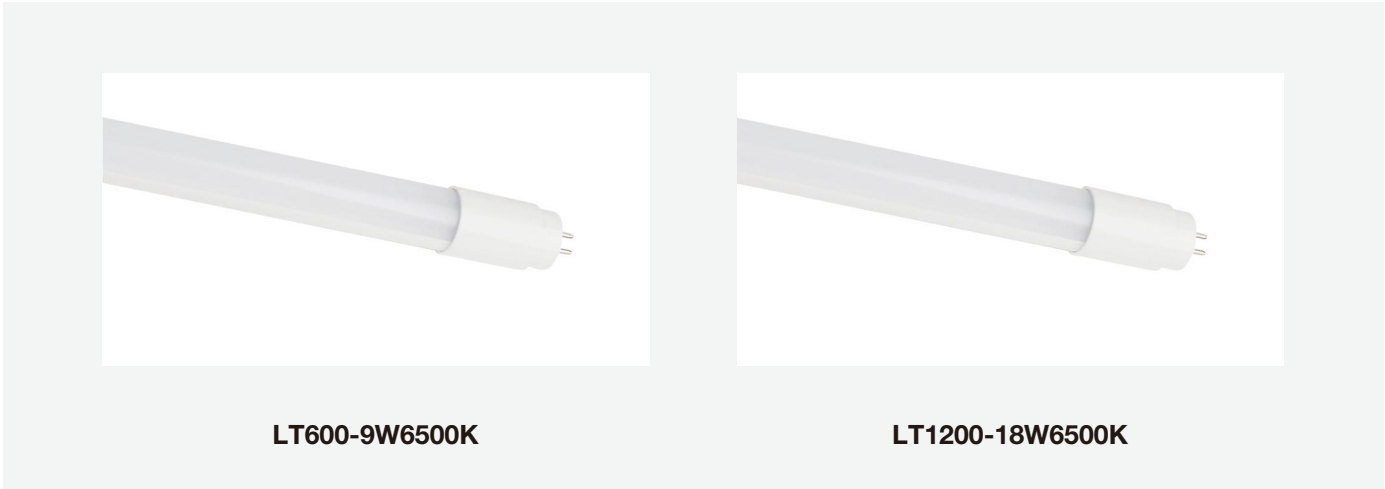


White

Product Features

- High luminous efficiency
- Wide beam angle 200 degrees, CRI exceeds 80
- Glass Materials: no turning yellow under long-term light, pollution-resistant, corrosion-resistant and durable
- Long lifespan 15,000 hours


Dimensions

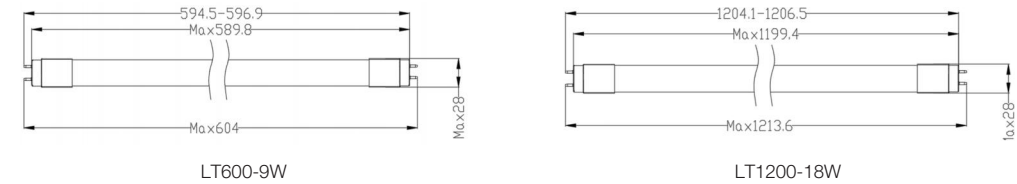

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
LT600-9W6500K	9360338002598	9W	1080lm	Ø28*604mm	WH	Glass	200°	6500K	10 PCS/CTN	680*200*H115mm
LT1200-18W6500K	9360338002604	18W	2160lm	Ø28*1213mm	WH	Glass	200°	6500K	10 PCS/CTN	1280*200*H115mm

LED GLOBES SECTION

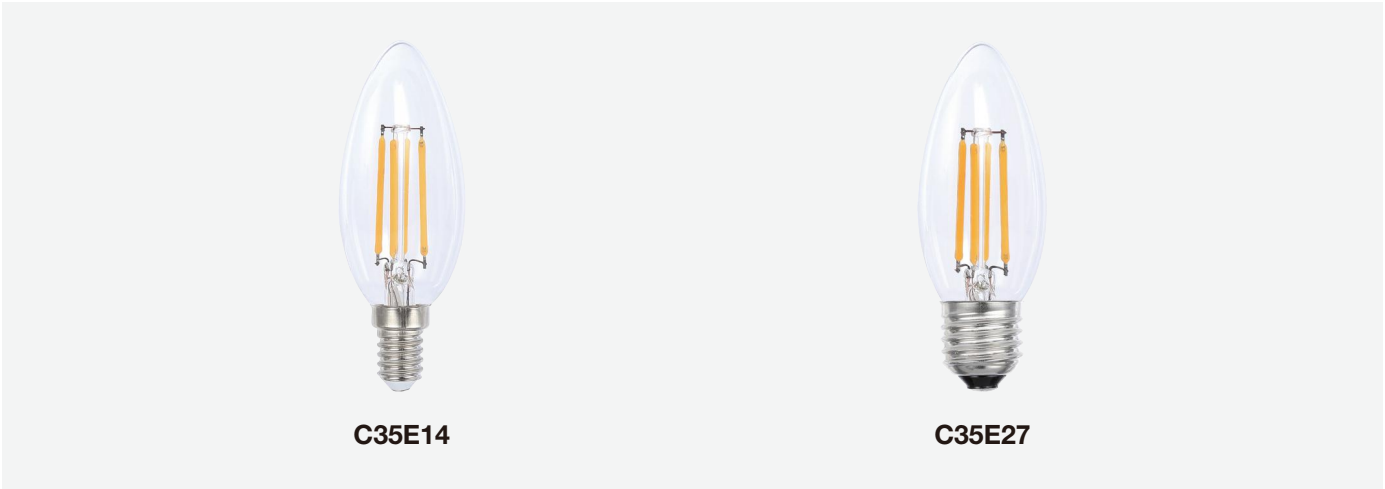

White



Product Features

- Low energy consumption
- Low maintenance cost
- Shockproof and vibration proof
- Dimmable
- PF $\geq$ 0.9
- Long lifespan 15,000 hours

Dimensions



C35E14




C35E27

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
C35-4W2700KE14D	9360338010357	4W	470lm	35*H100mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	420*215*155mm
C35-4W4000KE27D	9360338010364	4W	470lm	35*H100mm	WH	Die-cat Aluminum	4000K	100 PCS/CTN	420*215*155mm

LED GLOBES SECTION

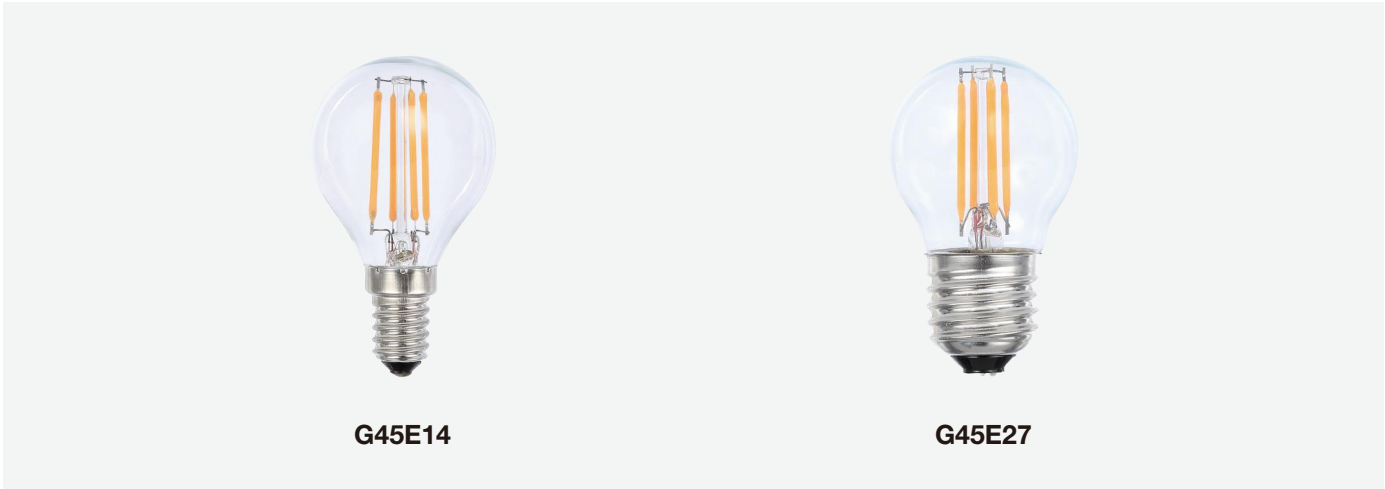

White



Product Features

- Low energy consumption
- Low maintenance cost
- Shockproof and vibration proof
- Dimmable
- PF≥0.9
- Long lifespan 15,000 hours

Dimensions



G45E14



G45E27

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
G45-4W2700KE14D	9360338010371	4W	470lm	45*H80mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	560*280*210mm
G45-4W4000KE27D	9360338010388	4W	470lm	45*H80mm	WH	Die-cat Aluminum	4000K	100 PCS/CTN	560*280*210mm

LED GLOBES SECTION



White



Product Features

- Low energy consumption
- Low maintenance cost
- Shockproof and vibration proof
- Dimmable
- PF≥0.9
- Long lifespan 15,000 hours

Dimensions



G95

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
G95-6W2700KE27D	9360338010319	6W	600lm	95*H140mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	100*100*155mm
G95-8W2700KE27D	9360338010326	8W	806lm	95*H140mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	100*100*155mm

LED GLOBES SECTION



White



Product Features

- Low energy consumption
- Low maintenance cost
- Shockproof and vibration proof
- Dimmable
- PF≥0.9
- Long lifespan 15,000 hours

Dimensions



G125

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
G125-6W2700KE27D	9360338010333	6W	600lm	125*H170mm	WH	Die-cat Aluminum	2700K	20 PCS/CTN	130*130*180mm
G125-8W2700KE27D	9360338010340	8W	806lm	125*H170mm	WH	Die-cat Aluminum	2700K	20 PCS/CTN	130*130*180mm

LED GLOBES SECTION




White



Product Features

- Low energy consumption
- Low maintenance cost
- Shockproof and vibration proof
- Dimmable
- PF≥0.9
- Long lifespan 15,000 hours

Dimensions



ST64

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
ST64-6W2700KE27D	9360338010272	6W	600lm	64*H140mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	70*70*149mm
ST64-6W4000KE27D	9360338010289	6W	600lm	64*H140mm	WH	Die-cat Aluminum	4000K	100 PCS/CTN	70*70*149mm
ST64-8W2700KE27D	9360338010296	8W	806lm	64*H140mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	70*70*149mm
ST64-8W4000KE27D	9360338010302	8W	806lm	64*H140mm	WH	Die-cat Aluminum	2700K	100 PCS/CTN	70*70*149mm



LED BATTEN LIGHT SERIES




White





Product Features

- Quality white powder coat finish with robust PC diffuser
- Large PA16 terminal block , easy installation
- Easy selectable colour temperature with a switch 3000K / 4000K / 5700K
- Easy selectable power with an External DIPswitch 20W , 30W and 40W
- High efficiency SMD LED chips , CRI>80
- 120 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver

Dimensions



BT20-TC20



BT40-TCTP203040

Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	CCT	Packaging	Dimensions
BT20-TC20	9360338002376	10W-15W-20W	1330lm-1900lm-2400lm	600*60*65mm	WH	120°	3000K/4000K/5700K	10 PCS/CTN	635*150*400mm
BT40-TCTP203040	9360338002383	20W-30W-40W	2600lm-3810lm-4770lm	1200*60*65mm	WH	120°	3000K/4000K/5700K	6 PCS/CTN	1235*150*240mm

LED BATTEN LIGHT SERIES




White

Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- High efficiency SMD LED chips, CRI> 80
- 120 degree beam distribution
- Integral constant current non-dimmable and
- flicker free LED driver 22watt models

Dimensions



LED/BT-22/DL


Technical Specification

Model	W	lm	Size	Color	Beam	CCT	Pack	Box
LED/BT-22W/DL	22W	3000lm	1200*60*65mm	WH	120°	5000K	6 PCS/CTN	1235*150*240 mm

LED BATTEN LIGHT SERIES




White




Product Features

- Quality white powder coat finish with robust pc diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an external DIP switch 3000K, 4000K, 5700K
- High efficiency SMD LED chips, CRI > 80
- 120 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver 20watt models
- Micorwave motion sensor by Remote Control and dip switch

Dimensions



BT20-TC20S




BT40-TC40S

Technical Specification

Model	Barcode	W	lm	Size	Color		CCT		
BT20-TC20S	9360338006961	20W	1840lm-1920lm-1920lm	600*60*65mm	WH	120°	3000K/4000K/5700K	10 PCS/CTN	635*150*400 mm
BT40-TC40S	9360338006978	40W	3680lm-3840lm-3960lm	1200*60*65mm	WH	120°	3000K/4000K/5700K	6 PCS/CTN	1235*150*240 mm

VANDAL PROOF BATTEN

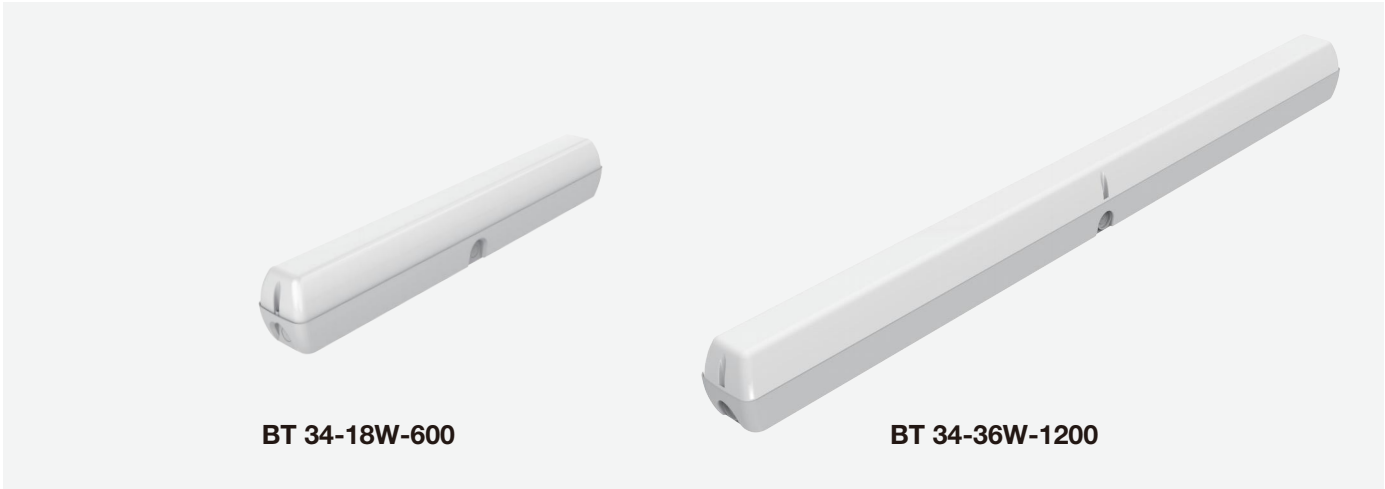



Gray



Product Features

- Robust design Polycarbonate grey body and opal diffuser, UV resistant
- 3 CCT switchable(3000K/4000K/5700K)
- 4 Lumen selectable
- IP66 rated, for water and dustproof
- IK10 impact resistant
- Stainless steel secure fastening screws
- Multiple cable entry: side or end or rear
- Smart sensor and emergency kit for option
- Large terminal block for easy installation
- Reliable with a long lifetime of 50000hours
- Ta:-20°C to +40°C
- 5 years warranty


Dimensions

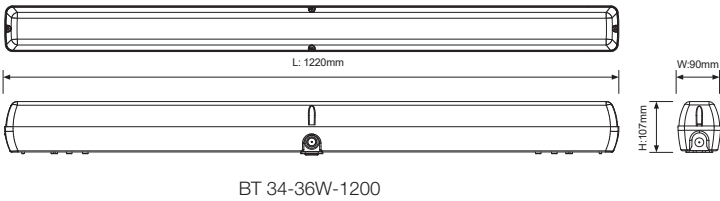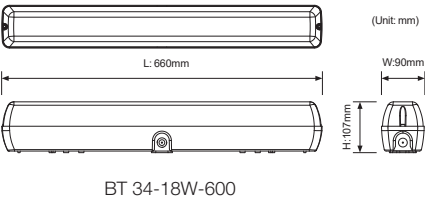

Technical Specification

Model	W	Size	Color	Material	CCT	
BT 34-18W-600	18W	660*90*107mm	Grey	Polycarbonate	3000K/4000K/5700K	9 PCS/CTN
BT 34-36W-1200	36W	1220*90*107mm	Grey	Polycarbonate	3000K/4000K/5700K	9 PCS/CTN

LED BATTEN LIGHT SERIES

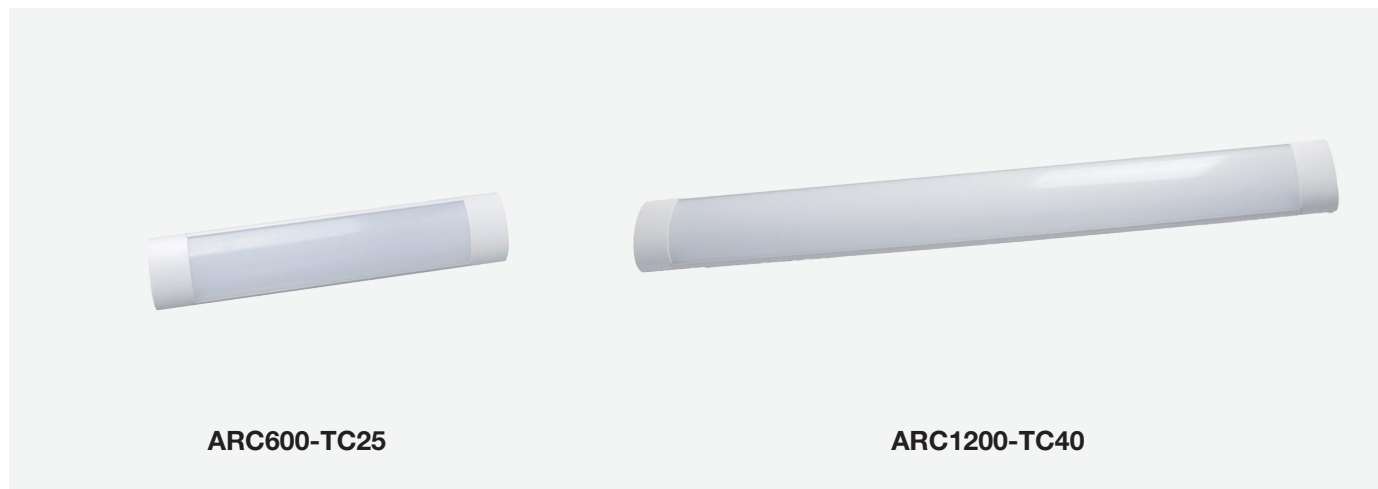

White




Product Features

- Interior surface mounted LED dimmable Tri-CCT batten
- Housing : powder coated aluminium , heatsink : aluminium
- Colour temperature changeable : 3000K / 4000K / 6000K
- Internal switch (under diffuser) , central hole in mounting plate
- Ambient temperature : -20 to 40°C

Dimensions



ARC600-TC25



ARC1200-TC40

Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	CCT	Packaging	Dimensions
ARC600-TC25	9360338002321	25W	2200lm	610*120mm	WH	120°	3000K/4000K/6000K	10 PCS/CTN	630*225*270 mm
ARC1200-TC40	9360338002338	40W	3800lm	1210*120mm	WH	120°	3000K/4000K/6000K	10 PCS/CTN	1230*225*270 mm

LED BATTEN LIGHT SERIES




White

Product Features

- Easy for installation
- Central hole for input power cable
- Built in terminal block
- Aluminium body and PC cover
- IP 20 for indoor use
- Available for 3CCT switch control


Dimensions



Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	Material	CCT	Packaging	Dimensions
LS600-TC18	9360338002345	18W	1800lm	600*75*30mm	WH	120°	Aluminium+PC	3000K/4000K/6000K	10 PCS/CTN	625*175*195 mm
LS1200-TC36	9360338002352	36W	3600lm	1200*75*30mm	WH	120°	Aluminium+PC	3000K/4000K/6000K	10 PCS/CTN	1225*184*215 mm

LED BATTEN LIGHT SERIES

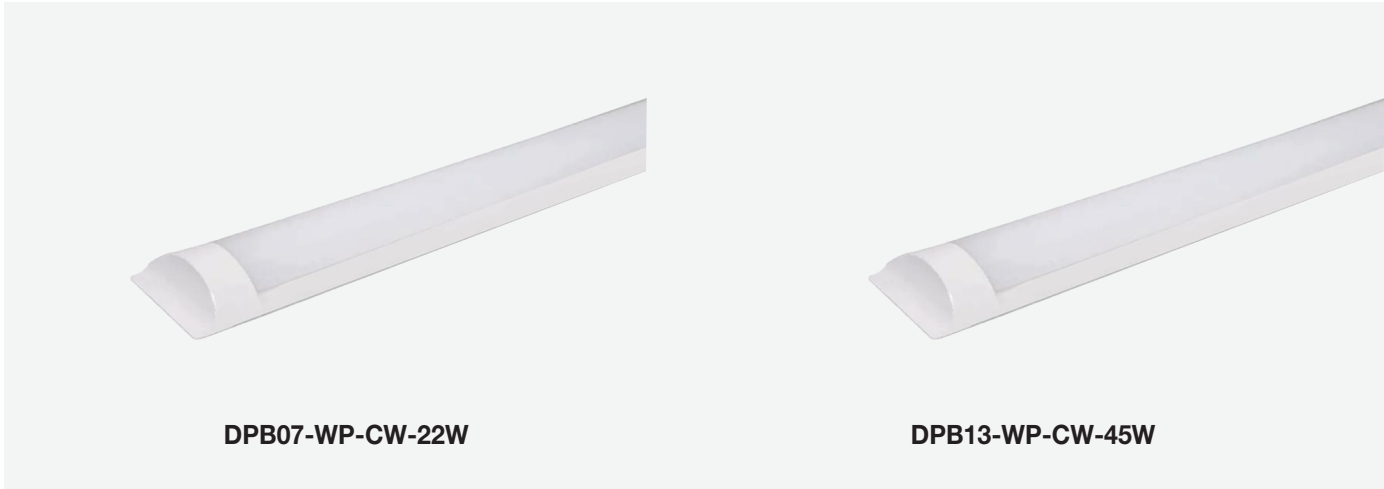


White



Product Features

- Easy installation , simple , elegant and stylish design
- IP65 Usable Indoor and Outdoor

Dimensions



DPB07-WP-CW-22W & DPB13-WP-CW-45W

Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	Material	CCT	Packaging	Dimensions
DPB07-WP-CW-22W	9360338011781	22W	1950lm	600*78.4*28.2mm	WH	110°	PC	5500K	25 PCS/CTN	685*460*225 mm
DPB13-WP-CW-45W	9360338011798	45W	3750lm	1210*78.4*28.2mm	WH	110°	PC	5500K	25 PCS/CTN	1285*460*225mm

LED BATTEN LIGHT SERIES



VP2032-TC12

 Opal+Grey




























Product Features

- Vandal proof batten
- Robust polycarbonate base and diffuser
- Tri-colour temperature
- Three years warranty

Dimensions

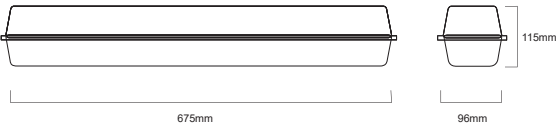

VP2032-TC12

Technical Specification

Model	Barcode	W	lm	Size	Color		CCT		
VP2032-TC12	9360338002581	12W	1200lm	675*96*115mm	Opal+Grey	160°	3000K/4000K/6500K	6 PCS/CTN	700*220*400 mm

LED BATTEN LIGHT SERIES



SP110PS-WH6K9


SP120PS-WH6K18

SP210PS-WH6K2X9

SP220PS-WH6K2X18



White




Product Features

- Easy Installation
- IP20 Indoor use only
- Surface mount installation
- Single or double T8 LED Tubes
- Cover: PMMA diffuser
- Metal body, quality powder coated

Technical Specification

Model	Barcode	W	lm	Size	Color	Beam Angle	CCT	Packaging	Dimensions
SP110PS-WH6K9	9360338011804	1*9W	850lm	620*68*90mm	WH	120°	6000K	4 PCS/CTN	650*210*170 mm
SP120PS-WH6K18	9360338011811	1*18W	1700lm	1230*68*90mm	WH	120°	6000K	4 PCS/CTN	1250*210*170 mm
SP210PS-WH6K2X9	9360338011828	2*9W	1700lm	620*124*90mm	WH	120°	6000K	4 PCS/CTN	650*210*290 mm
SP220PS-WH6K2X18	9360338002536	2*18W	3400lm	1230*124*90mm	WH	120°	6000K	4 PCS/CTN	1250*210*290mm

LED BATTEN LIGHT SERIES




Product Features

- Easy Installation
- Metal body, quality white powder coated
- No UV and IR radiation
- Surface mount installation
- Single or double T8 LED Tubes
- Indoor only
- Cover: Wire Guard

Technical Specification


Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
SP110WG-WH6K9	9360338011835	1*9W	1060lm	620*68*90mm	WH	Metal	120°	6000K	4 PCS/CTN	650*210*170mm
SP120WG-WH6K18	9360338002437	1*18W	2130lm	1230*68*90mm	WH	Metal	120°	6000K	4 PCS/CTN	1250*210*170mm
SP210WG-WH6K2X9	9360338011842	2*9W	2130lm	620*124*90mm	WH	Metal	120°	6000K	4 PCS/CTN	650*210*290mm
SP220WG-WH6K2X18	9360338011859	2*18W	4250lm	1230*124*90mm	WH	Metal	120°	6000K	4 PCS/CTN	1250*210*290mm

LED BATTEN LIGHT SERIES

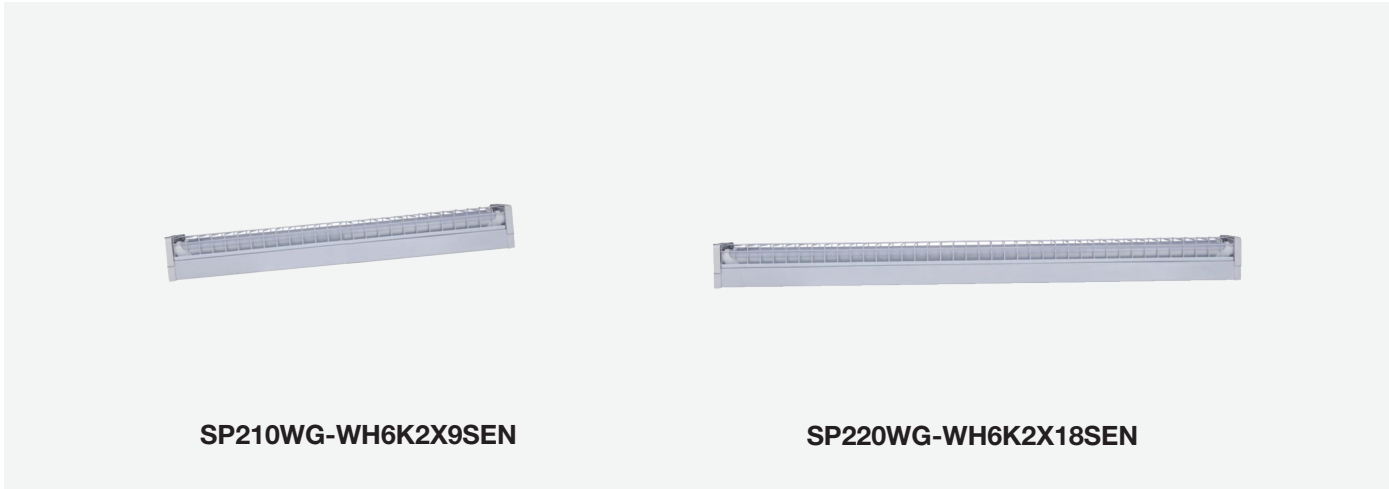

Product Features

- Easy Installation
- Metal body, quality white powder coated
- No UV and IR radiation
- Surface mount installation
- Double T8 LED Tubes
- With On/Off starlux microwave sensor
- Indoor only
- Cover: Wire Guard

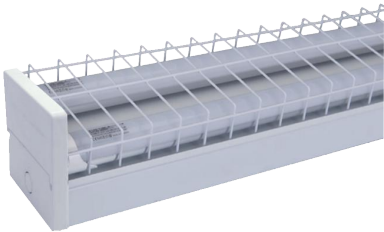

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	Beam Angle	CCT	Packaging	Dimensions
SP210WG-WH6K2X9SEN	9360338011866	2*9W	2130lm	620*124*90mm	WH	Metal	120°	6000K	4 PCS/CTN	650*210*290 mm
SP220WG-WH6K2X18SEN	9360338002574	2*18W	4250lm	1230*124*90mm	WH	Metal	120°	6000K	4 PCS/CTN	1250*210*290 mm

LED BATTEN LIGHT SERIES




DPB118WPNB-9

DPB136WPNB-18

DPB218WPNB-2X9



DPB236WPNB-2X18



Product Features

- A high quality PC Cover and PC housing
- 50% Energy saving compare to traditional T8 tubes
- Replacement of old technology TriProofs
- IK08 impact resistant
- Glow Wire Test: GWT850°C
- Mounting Location: Wall/Floor
- Application: Parkings, Building facades, Garage, Car port
- The design is made according the EN for fire-risk (for example accumulation of dust)

Dimensions

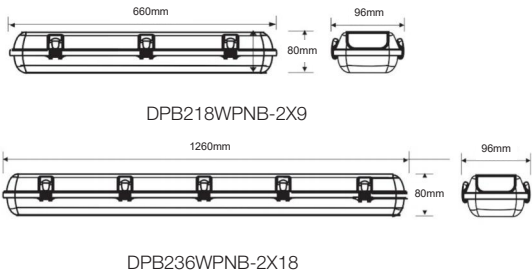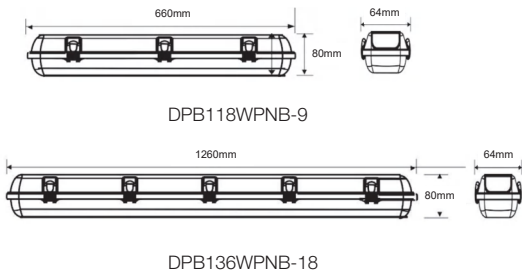

Technical Specification

Model	Barcode	W	Size	Color	Material		
DPB118WPNB-9	9360338011873	1*9W	660*64*80mm	WH	Polycarbonate	15 PCS/CTN	690*290*220 mm
DPB136WPNB-18	9360338011880	1*18W	1260*64*80mm	WH	Polycarbonate	15 PCS/CTN	1290*290*220 mm
DPB218WPNB-2X9	9360338011897	2*9W	660*96*80mm	WH	Polycarbonate	10 PCS/CTN	690*290*210mm
DPB236WPNB-2X18	9360338002512	2*18W	1260*96*80mm	WH	Polycarbonate	10 PCS/CTN	1290*290*210mm

LED BATTEN LIGHT SERIES



DPB218WPWB-2X9 DPB236WPWB-2X18




White




Product Features

- A high quality Polycarbonate Cover and Polycarbonate housing
- IK08 impact resistant

Dimensions

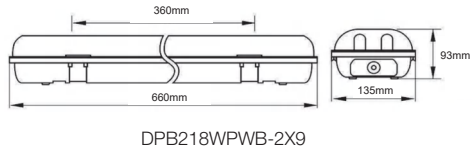

DPB218WPWB-2X9




DPB236WPWB-2X18

Technical Specification

Model	Barcode	W	Size	Color	Material		
DPB218WPWB-2X9	9360338011903	2*9W	660*135*93mm	WH	Polycarbonate	8 PCS/CTN	680*300*380 mm
DPB236WPWB-2X18	9360338002529	2*18W	1260*135*93mm	WH	Polycarbonate	6 PCS/CTN	1290*290*300 mm

LED BATTEN LIGHT SERIES

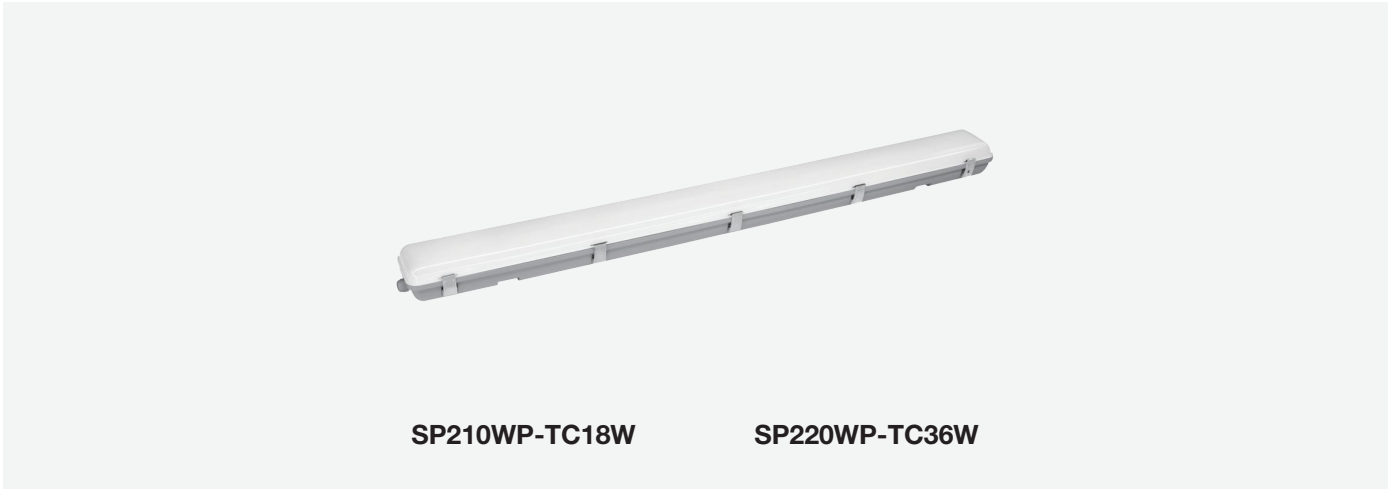

SP210WP-TC18W


SP220WP-TC36W

White

Product Features

- CCT :3000K /4000K /6000K, IP65 IK08
- Robust PC body & UV stabilized PC diffuser
- Stainless steel clips & mounting brackets
- Non dimmable
- Driver:Tridonic SNC2
- Ambient Temp.-20~40°C
- Glow Wire Test: GWT850°C

Dimensions

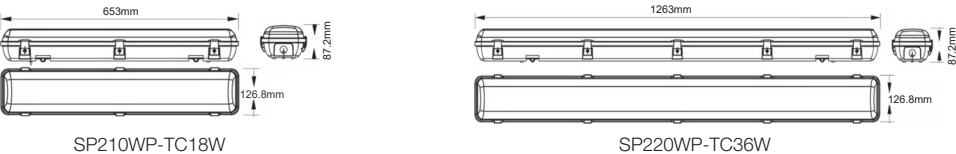

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
SP210WP-TC18W	9360338002543	18W	2160lm	653*126.8*87.2mm	WH	Polycarbonate	3000K/4000K/6000K	8 PCS/CTN	695*385*280 mm
SP220WP-TC36W	9360338002550	36W	4320lm	1263*126.8*87.2mm	WH	Polycarbonate	3000K/4000K/6000K	6 PCS/CTN	1305*275*205 mm

LED BATTEN LIGHT SERIES



SP220WP-TC36WSEN



White

AC
220-240V

CRI 80

PF>0.9

IP65

Product Features

- CCT 3000K/4000K/6000K,IP65 IK08
- Robust PC body & UV stabilized PC diffuser
- Stainless steel clips & mounting brackets
- On/Off 3 step dimming function
- Ambient Temp. -20~40°C
- Glow Wire Test:GWT850°C

Dimensions



SP220WP-TC36WSEN

Technical Specification

Model	Barcode	W	lm	Size	Color	Material	CCT		
SP220WP-TC36WSEN	9360338002567	36W	4320lm	1263*126.8*87.2mm	WH	Polycarbonate	3000K/4000K/6000K	6 PCS/CTN	1305*275*205 mm

LED BATTEN LIGHT SERIES




White

Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an
- External DIP switch 3000K, 4000K, 5700K
- Easy slectable power with an External DIP switch 20W, 30W and 40W
- High efficiency SMD LED chips, CRI > 80
- 120 degree beam distribution
- Linkable without gap
- Non-dimmable and flicker free LED driver

Dimensions



BT41-TCTP203040

Technical Specification

Model	Barcode	W	lm	Size	Color		CCT		
BT41-TCTP203040	9360338007005	20W-30W-40W	2700/4000/5000lm	1170*65*70mm	WH	120°	3000K/4000K/5700K	6 PCS/CTN	1195*225*175mm

LED BATTEN LIGHT SERIES



BT22-TCTP101520


 White



Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an External DIP switch 3000K, 4000K, 5700K
- Easy slectable power with an External DIP switch 10W, 15W and 20W
- High efficiency SMD LED chips, 130lm/w, CRI > 80
- 120 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver
- Distinct Low Glare design, UGR<22
- Emergency and Sensor version are available

Dimensions



BT22-TCTP101520

Technical Specification

Model									
BT22-TCTP101520	10W-15W-20W	2600lm±5%@20W	4000K	583*67*73mm	WH	120°	3000K/4000K/5700K	10 PCS/CTN	620*165*440mm

LED BATTEN LIGHT SERIES




White

Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an External DIP switch 3000K, 4000K, 5700K
- Easy slectable power with an External DIP switch 20W, 30W and 40W
- High efficiency SMD LED chips, 130lm/w, CRI > 80
- 120 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver
- Distinct Low Glare design, UGR<22
- Emergency and Sensor version are available

Dimensions

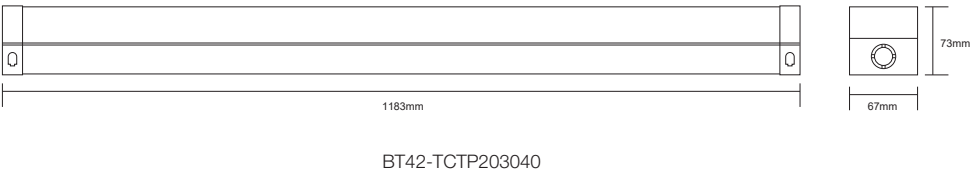

Technical Specification

Model	W	lm	Size	Color	Beam Angle	CCT	Packaging	Dimensions
BT42-TCTP203040	20W-30W-40W	5200lm±5%@40W 4000K	1183*67*73mm	WH	120°	3000K/4000K/5700K	6 PCS/CTN	1220*165*270mm


LED BATTEN LIGHT SERIES



Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an External DIP switch 3000K, 4000K, 5700K
- Easy slectable power with an External DIP switch 20W, 30W and 40W
- High efficiency SMD LED chips, 130lm/w, CRI > 80
- 75 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver
- Distinct Low Glare design, UGR<22
- Emergency and Sensor version are available

Dimensions



BT44-TCTP203040

Technical Specification

Model	W	lm	Size	Color		CCT		
BT44-TCTP203040	20W-30W-40W	5200lm±5%@40W 4000K	1183*67*73mm	WH	75°	3000K/4000K/5700K	6 PCS/CTN	1220*155*260mm



SECURITY LIGHT AND SENSOR SERIES


SECURITY LIGHT AND SENSOR SERIES



AC4203



AC4202



Product Features

- Tri-Colour LED, 3000K,4000K,5000K selectable
- IP44 weatherproof
- With override function 180° detection angle, up to 12m detection distance
- Designed to work from daylight to night.
- The lux level is adjustable
- Working duration is adjustable from 10 seconds to 4±1 minutes

Technical Specification

Model	Barcode	W	lm	Color	Beam	CCT	Pack	Size
AC4203-BCTC	9360338004950	15W	1030lm	BC	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4203-WHTC	9360338004981	15W	1030lm	WH	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4203-BKTC	9360338004967	15W	1030lm	BK	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4203-SLTC	9360338004974	15W	1030lm	SIL	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4202-BCTC	9360338004912	2*15W	2060lm	BC	90°	3000K/4000K/5000K	6 PCS/CTN	455*350*220mm
AC4202-WHTC	9360338004943	2*15W	2060lm	WH	90°	3000K/4000K/5000K	6 PCS/CTN	455*350*220mm
AC4202-BKTC	9360338004929	2*15W	2060lm	BK	90°	3000K/4000K/5000K	6 PCS/CTN	455*350*220mm
AC4202-SLTC	9360338004936	2*15W	2060lm	SIL	90°	3000K/4000K/5000K	6 PCS/CTN	455*350*220mm

SECURITY LIGHT AND SENSOR SERIES




White


Black


Silver


Chrome















Product Features

- Tri-colour LED, 3000K,4000K,5000K selectable
- IP65 weatherproof
- Electrician friendly quick connection design
- Input : 240V 50Hz

Technical Specification

Model	Barcode	W	lm	Color		CCT		
AC4206-BCTC	9360338005032	15W	1030lm	BC	90°	3000K/4000K/5000K	12 PCS/CTN	455*255*280mm
AC4206-WHTC	9360338005063	15W	1030lm	WH	90°	3000K/4000K/5000K	12 PCS/CTN	455*255*280mm
AC4206-BKTC	9360338005049	15W	1030lm	BK	90°	3000K/4000K/5000K	12 PCS/CTN	455*255*280mm
AC4206-SLTC	9360338005056	15W	1030lm	SIL	90°	3000K/4000K/5000K	12 PCS/CTN	455*255*280mm
AC4205-BCTC	9360338004998	2*15W	2060lm	BC	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4205-WHTC	9360338005025	2*15W	2060lm	WH	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4205-BKTC	9360338005001	2*15W	2060lm	BK	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm
AC4205-SLTC	9360338005018	2*15W	2060lm	SIL	90°	3000K/4000K/5000K	8 PCS/CTN	350*310*370mm

SECURITY LIGHT AND SENSOR SERIES

Double with Sensor



ES-B06B

Double No Sensor



ES-B06W




Black




Product Features

- Approx 1600 Lumens
- Adjustable time & lux manually
- IP44 weatherproof (MUST BE MOUNTED UNDER EAVE)
- SENSOR WITH MANUAL OVER-RIDE FUNCTION
- Installation Height :1.8m-2.5m

Dimensions



ES-B06B



ES-B06W

Technical Specification

Model	Barcode	W	lm	Color		Detection range	Detection Motion Speed
ES-B06B	9360338004899	2*10W PAR 30 LED	1600lm	BK	120°	180°	0.6-1.5/s
ES-B06W	9360338004905	2*10W PAR 30 LED	1600lm	BK	120°		

Model	Detension Distance	Time Delay	Ambient Light		
ES-B06B	12m MAX(<24°C)	Min.10 sec ± 3 sec; Max.7mim ± 2 min	<10-2000LUX adjustable	20 PCS/CTN	695*380*370mm
ES-B06W				20 PCS/CTN	720*310*400mm

SECURITY LIGHT AND SENSOR SERIES



Product Features

- 3 wires
- Suitable with LED
- Manual override
- <3-2000LUX adjustable
- AC240V50Hz
- Detection Motion Speed:0.6-1.5/s

Technical Specification

Model	Barcode	Reated Load	Color	IP	Detection range	Installation Height	Detension Distance	Time Delay		
ST09-WH	9360338005179	Max.1200W	WH	IP44	180°	1.8m-2.5m	12m MAX(<24°C)	Min.10 sec±3 sec;Max.7mim±2 min	50 PCS/CTN	480*415*227mm
ST09-BK	9360338005162	Max.1200W	BK	IP44	180°	1.8m-2.5m	12m MAX(<24°C)	Min.10 sec±3 sec;Max.7mim±2 min	50 PCS/CTN	480*415*227mm
ST19-WH	9360338005186	Max.1200W	WH	IP66	120°	1.8m-2.5m	6-18m MAX(<24°C)	Min.10 sec±3 sec;Max.30mim±2 min	40 PCS/CTN	510*450*340mm
ST19-BK	9360338005193	Max.1200W	BK	IP66	120°	1.8m-2.5m	6-18m MAX(<24°C)	Min.10 sec±3 sec;Max.30mim±2 min	40 PCS/CTN	510*450*340mm
ST05C	9360338005155	Max.1200W	WH	IP20	360°	2.2m-4.0m	6m MAX(<24°C)	Min.10 sec±3 sec;Max.15mim±2 min	50 PCS/CTN	625*220*265mm
ST765	9360338005216	Max.1200W	WH	IP65	180°	1.5m-3.5m	5-15m MAX(adjustable)	Min.10 sec±3 sec;Max.12mim±1 min	50 PCS/CTN	440*395*225mm
ST41C	9360338005209	Max.1200W	WH	IP20	360°	2.2m-4.0m	6m MAX(<24°C)	Min.10 sec±3 sec;Max.15mim±2 min	50 PCS/CTN	490*450*190mm


SECURITY LIGHT AND SENSOR SERIES



DIM-400



DIM-TOUCH(350VA)



round edged face
square edged face also available



White



Black




Product Features

- Soft start, over load protection & short circuit protection
- Easy to mount in most Australia plates
- Suitable for dimming dimmable LED globes, incandescent globes, high voltage halogen globes, electronic transformers with low voltage halogen globes
- IP rating: IP20
- Ambient Temp.: 0 to 40°C
- Storage Temp.: 0 to 60°C
- Life time: Min. 20,000 cycles
- Operating & Storage Humidity: 10% to 95% RH no condensing
- 3 Years replacement warranty


Load Compatibility

Compatible Loads	Model no . DIM-400	
	Maximum Load	Minimum Load
Dimmable LED Lighting	150W	10W
Incandescent Lighting 240 V Halogen Lamps	400W	10W
Low Voltage Halogen Lighting with Electronic Transformers	400VA	10VA

Dimensions

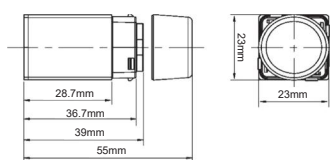

DIM-400

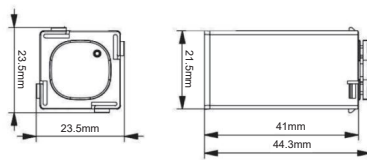

DIM-TOUCH(350VA)

Technical Specification

Model	Barcode	Rated Load	Size	Compatible with 3A downlights
DIM-400	9360338005773	10-400VA	23*23*55mm	YES , all 3A downlights
DIM-TOUCH(350VA)	9360338005780	5-350VA	23.5*23.5*44.3mm	NOT DL1640/DL1641/DL1642/1560/DL1570/DL9454/DL9415/DL9416

Hi-Pot: Applying 3KVrms voltage between the surface of the button of the unit against its opening ends of two fly wires which are electrically connected together, the unit will not have trigger current higher than 1mA during the 1 minutes test duration.



LED EMERGENCIES LIGHT SERIES



SP2001-WH



SP2001-BK



White



Black



Product Features

- Ceiling / Wall mount Exit-Maintained operation
- allowing 2 hours minimum lighting after power cut
- 24m viewing distance
- Long life-span with low power consumption
- In accordance with AS2293.3 & IEC 60598-2-22
- Supplied with 4pcs PVC stickers


Applications

widely used in modern hotels , shops and other public places , security evacuation and guide

Installation

Surface mount/wall mount

Dimensions



SP2001

Technical Specification

Model	Barcode	W	Color	Material	Battery	Charge Time	Discharge time	Charging mode	DC power	Classification	Side
SP2001-WH	9360338005230	3W	WH	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	3W	1W	24M	Single / Double
SP2001-BK	9360338005223	3W	BK	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	3W	1W	24M	Single / Double

Model	Work Mode	Indicator	Cable	Protection	Standard	Light Source	Quantity
SP2001-WH	Maintain	Red-charging	No, only AU connector	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	2*16pcs LED (WHITE)	4 PCS/CTN 360*340*235 mm
SP2001-BK	Maintain	Red-charging	No, only AU connector	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	2*16pcs LED (WHITE)	4 PCS/CTN 360*340*235 mm

LED EMERGENCIES LIGHT SERIES




Product Features

- Recessed (Sp2002)/Surface (Sp2003) mount Exit
- Maintained operation
- 24m viewing distance
- Long life-span with low power consumption
- In accordance with AS2293.3 & IEC 60598-2-22
- LIFO Battery
- SP2002-WH & SP2003-WH: 4PCS PVC stickers
- SP2002-BK & SP2003-BK: 8PCS PVC stickers

Applications

widely used in modern hotels , shops and other public places , security evacuation and guide

Dimensions

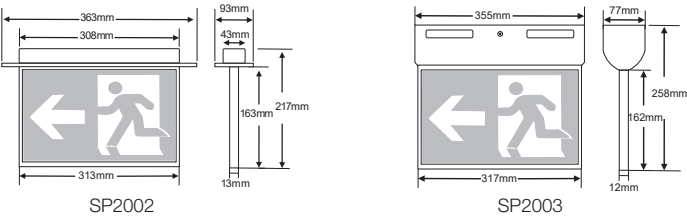


Technical Specification

Model	Barcode	W	Color	Material	Battery	Charge Time	Discharge time	DC power	installtion	Side	Work Mode
SP2002-WH	9360338005247	2.5W	WH	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	1W	Recessed mount	Single / Doube	Maintain
SP2002-BK	9360338005254	2.5W	BK	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	1W	Recessed mount	Single / Doube	Maintain
SP2003-WH	9360338005261	2.5W	WH	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	1W	Surface mount	Single / Doube	Maintain
SP2003-BK	9360338005278	2.5W	BK	Flame retardant (V-0)	4.8V 1200mAh NI-MH	24hours	2hours	1W	Surface mount	Single / Doube	Maintain

Model	Indicator	Cable	Protecion	Standard	Light Soure		
SP2002-WH	Red-charging	Flex and AU Plug	Over-Charge/Over discharge AS/NZS 2293 IEC 60598-2-22		2*16pcs LED (WHITE)	4 PCS/CTN	400*395*190 mm
SP2002-BK	Red-charging	Flex and AU Plug	Over-Charge/Over discharge AS/NZS 2293 IEC 60598-2-22		2*16pcs LED (WHITE)	4 PCS/CTN	400*395*190 mm
SP2003-WH	Red-charging	No, only AU connectors	Over-Charge/Over discharge AS/NZS 2293 IEC 60598-2-22		2*16pcs LED (WHITE)	4 PCS/CTN	400*395*190 mm
SP2003-BK	Red-charging	No, only AU connectors	Over-Charge/Over discharge AS/NZS 2293 IEC 60598-2-22		2*16pcs LED (WHITE)	4 PCS/CTN	400*395*190 mm

LED EMERGENCIES LIGHT SERIES




Product Features

- Recessed (SP-3001)/Surface (SP-3002) mount spitfire
- Non-maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption
- LIFO Battery

Applications

widely used in modern hotels , shops and other public places , security evacuation and guide

Dimensions

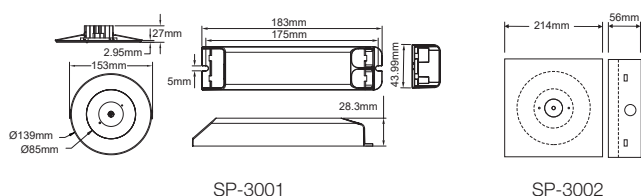

Technical Specification


Model	Barcode	W	Size	Color	Material	Battery	Charge Time	Discharge time	DC power	installtion
SP3001-WH	9360338005292	2.5W	Ø153*H27mm	WH	Flame retardant (V-0)	6.4V 1500mAh LiFePO4	16/24hours	2/3hours	2.5W(200lm)	Recessed mount
SP3001-BK	9360338005285	2.5W	Ø153*H27mm	BK	Flame retardant (V-0)	6.4V 1500mAh LiFePO4	16/24hours	2/3hours	2.5W(200lm)	Recessed mount
SP3002-WH	9360338005308	2.5W	214*214*H56mm	WH	Flame retardant (V-0)	6.4V 1500mAh LiFePO4	16/24hours	2/3hours	2.5W(200lm)	Surface mount
SP3002-BK	9360338011224	2.5W	214*214*H56mm	BK	Flame retardant (V-0)	6.4V 1500mAh LiFePO4	16/24hours	2/3hours	2.5W(200lm)	Surface mount

Model	Work Mode	Indicator	Cable	Protecion	Standard	Classification		
SP3001-WH	Non-maintain	Red-charging	With Flex and AU plug	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	C0 : D40 C90 : 40	20 PCS/CTN	390*310*240 mm
SP3001-BK	Non-maintain	Red-charging	With Flex and AU plug	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	C0 : D40 C90 : 40	20 PCS/CTN	390*310*240 mm
SP3002-WH	Non-maintain	Red-charging	No,only AU connectors	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	C0 : D40 C90 : 40	8 PCS/CTN	280*245*470 mm
SP3002-BK	Non-maintain	Red-charging	No,only AU connectors	Over-Charge/Over discharge	AS/NZS 2293 IEC 60598-2-22	C0 : D40 C90 : 40	8 PCS/CTN	280*245*470 mm

LED EMERGENCIES LIGHT SERIES



White




Product Features

- LED emergency ceiling light - Maintained operation
- allowing 2 hours minimum lighting after power cut
- Long life-span with low power consumption
- Opal Acrylic Diffuser, diffuser twist lock mechanism
- In accordance with AS2293
- With daylight (6000K)
- With microwave sensor optional

Applications

widely used in modern hotels , shops and other public places , security evacuation and guide

Dimensions



Technical Specification

Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time
SP1001	9360338005315	Ø380*H100	WH	Flame retardant (V-0)+metal	4.8V 1200mAh NI-MH	24hours	2hours

Model	DC power	AC power	Classification	Work Mode	Standard		
SP1001	1W(140lm)	30W(2800lm)	D25	Maintain	AS/NZS 2293	5 PCS/CTN	610*430*440mm

LED EMERGENCIES LIGHT SERIES



White



Product Features

- LED emergency diffused batten
- Maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption

Applications


widely used in modern hotels , shops and other
public places , security evacuation and guide

Technical Specification

Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time
SP210PS-WH6K2X9EM	9360338005353	637*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours
SP120PS-WH6K18EM	9360338005339	1247*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours
SP220PS-WH6K2X18EM	9360338005384	1247*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours

Model	DC LED power	AC LED power	Classification	Work Mode	Test	Emergency lumen	CCT		
SP210PS-WH6K2X9EM	DC wattage:1.7W	2*9W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	650*250*190 mm
SP120PS-WH6K18EM	DC wattage:1.7W	1*18W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	1260*250*190 mm
SP220PS-WH6K2X18EM	DC wattage:1.7W	2*18W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	1260*250*190 mm


LED EMERGENCIES LIGHT SERIES

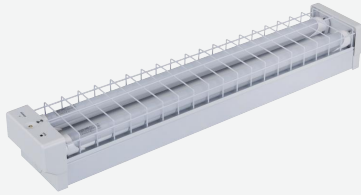

SP210WG-WH6K2X9EM



SP120WG-WH6K18EM

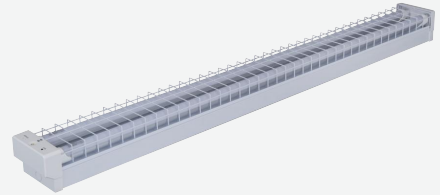

SP220WG-WH6K2X18EM



White



Product Features

- LED emergency batten with wire guard
- Maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption

Applications


widely used in modern hotels , shops and other
public places , security evacuation and guide

Technical Specification


Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time
SP210WG-WH6K2X9EM	9360338005360	637*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours
SP120WG-WH6K18EM	9360338005346	1247*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours
SP220WG-WH6K2X18EM	9360338005407	1247*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours

Model	DC LED power	AC LED power	Classification	Work Mode	Test	Emergency lumen	CCT		
SP210WG-WH6K2X9EM	DC wattage:1.7W	2*9W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	650*250*190 mm
SP120WG-WH6K18EM	DC wattage:1.7W	1*18W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	1260*250*190 mm
SP220WG-WH6K2X18EM	DC wattage:1.7W	2*18W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	1260*250*190 mm

LED EMERGENCIES LIGHT SERIES

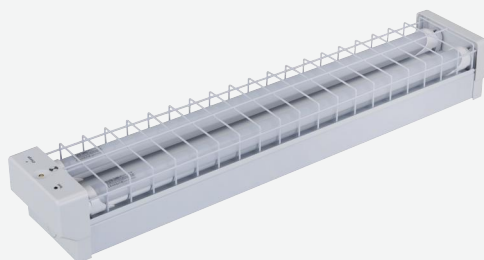

SP210WG-WH6K2X9SENEM

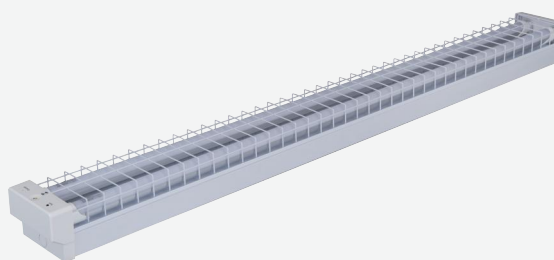

SP220WG-WH6K2X18SENEM



White

AC
220-240V

CRI 80

Ta
0°C-40°C2
years

Product Features

- LED emergency batten with wire guard
- Maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption
- With On / Off microwave sensor (Starlux sensor)

Applications

widely used in modern hotels , shops and other
public places , security evacuation and guide

Technical Specification


Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time	Sensor
SP210WG-WH6K2X9SENEM	9360338005360	637*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours	Starlux Sensor
SP220WG-WH6K2X18SENEM	9360338005407	1247*120*88mm	WH	Flame retardant (V-0)+Metal	4.8V 1800mAH NI-MM	24Hours	2Hours	Starlux Sensor

Model	DC LED power	AC LED power	Classification	Work Mode	Test	Emergency lumen	CCT		
SP210WG-WH6K2X9SENEM	DC wattage:1.7W	2*9W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	650*250*190mm
SP220WG-WH6K2X18SENEM	DC wattage:1.7W	2*18W LED TUBE	C0 : D25 C90 : D25	Maintain	Red-Charging	140lm	5500K	4 PCS/CTN	1260*250*190mm

LED EMERGENCIES LIGHT SERIES



White




Product Features

- LED emergency weather proof IP65 batten
- Maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption


Applications

widely used in modern hotels , shops and other public places , security evacuation and guide

Dimensions



SP210WP-TC18WEM



SP220WP-TC36WEM

Technical Specification

Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time
SP210WP-TC18WEM	9360338005377	655*130*88mm	WH	Flame retardant (V-0)+Metal	6.4V 1500mAH LiFePo	24Hours	2Hours
SP220WP-TC36WEM	9360338005421	1265*130*88mm	WH	Flame retardant (V-0)+Metal	6.4V 1500mAH LiFePo	24Hours	2Hours

Model	DC LED power	AC LED power	Classification	Work Mode	Emergency lumen		
SP210WP-TC18WEM	DC wattage:2.5W	2*10W LED Strip	C0 : D25 C90 : D25	Maintain	1800lm	4 PCS/CTN	675*260*185mm
SP220WP-TC36WEM	DC wattage:2.5W	2*20W LED Strip	C0 : D25 C90 : D25	Maintain	3600lm	4 PCS/CTN	1290*260*185mm

LED EMERGENCIES LIGHT SERIES



SP220WP-TC36WEMSEN



White




Product Features

- LED emergency weather proof IP65 batten
- Maintained operation
- In accordance with AS2293.3 & IEC 60598-2-22
- Long life-span with low power consumption
- with On/Off microwave sensor(StarLux Sensor)

Applications

widely used in modern hotels,shops and other public places, security evacuation and guide.

Dimensions

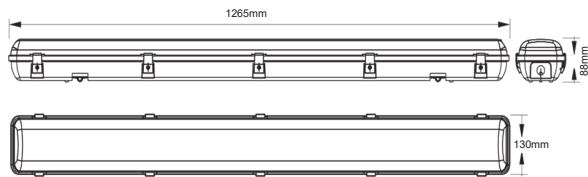

SP220WP-TC36WEMSEN

Technical Specification

Model	Barcode	Size	Color	Material	Battery	Charge Time	Discharge time
SP220WP-TC36WEMSEN	9360338005438	1265*130*88mm	WH	Flame retardant (V-0)+Metal	6.4V 1500mAH LiFePo	24Hours	2Hours

Model	Sensor	DC LED power	AC LED power	Classification	Work Mode	Emergency lumen		
SP220WP-TC36WEMSEN	Starlux Sensor	DC wattage:5W	2*20W LED Strip	C0 : D80 C90 : D63	Maintain	3600lm	4 PCS/CTN	1290*260*185mm

LED EMERGENCIES LIGHT SERIES




WP ENCLOSURE



Product Features

- polycarbonate enclosure for body and diffuser
 - Designed for wall or ceiling installatio
 - IP rating: IP65
 - Compatible with SP2001WH, SP2001 BK
- * Exit signs sold eparately

Dimensions



WP ENCLOSURE

Technical Specification

Model	Barcode	Size	N.M	G.W		
WP ENCLOSURE	9360338011910	385*305*104mm	5.2 KG	7.0 KG	4 PCS/CTN	460*410*300 mm

LED EMERGENCIES LIGHT SERIES



White

AC
200-240V
or 12V

IP20


Ta
0°C-40°C

3
years

Product Features

- Monitor up to 4 lighting circuits
- Triggers a relay / contactor if any of the monitored lines fail
- widely used in modern hotels, shops and other public places, security evacuation and guide

Dimensions

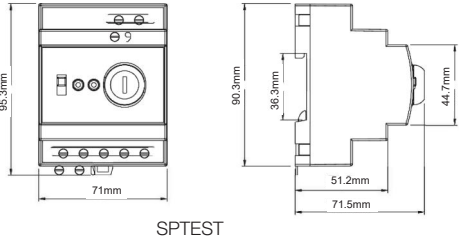

Technical Specification

Model	Barcode	W	Size	Color	Wiring	Mount Type	Relay Type	Relay Load
SPTEST	9360338011927	10W	71*95.3*71.5mm	WH	4mm ² terminals	DIN Rail (35mm)	Non-latching	16A 240V maximum

Model	Total Power Consumption	Duration	Relay Connection		
SPTEST	2W	90 / 120 minutes	Screw terminal for 1 to 4mm ² cable	50 PCS/CTN	420*395*220mm

ACCESSORIES




ACCESSORIES




Technical Specification

Model	Barcode
GU10LP	9360338005742
B12LP	9360338012009
GU10 to MR16 CONVERTER	9360338012016

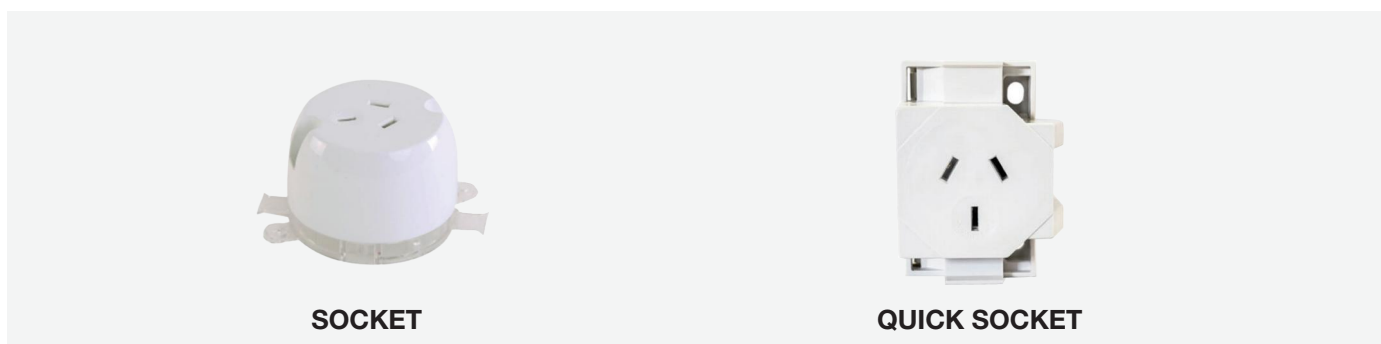

Technical Specification

Model	Barcode	AC		
SOCKET	9360338005759	AC250V 10Amp	100 PCS/CTN	785*360*H140 mm
QUICK SOCKET	9360338005766	AC250V 10Amp	200 PCS/CTN	480*320*H320 mm

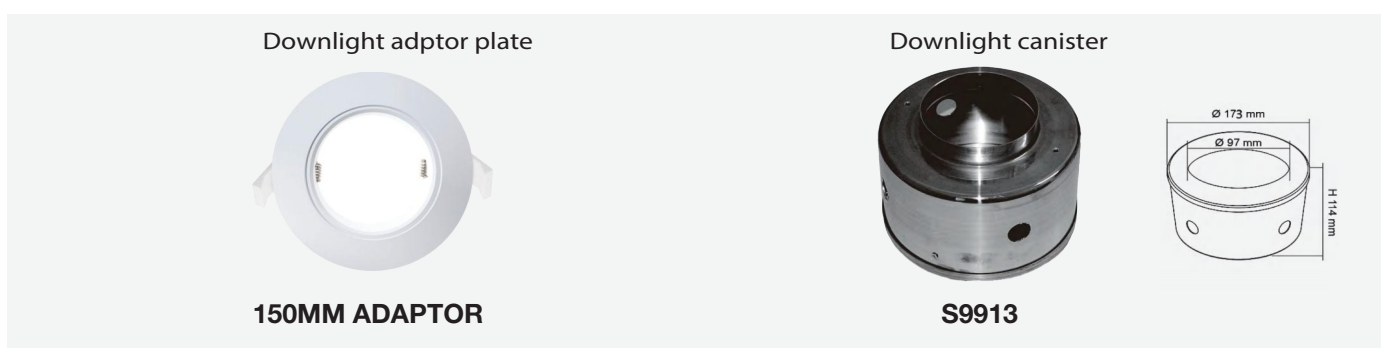

Technical Specification

Model	Barcode	Size		
150MM ADAPTOR	9360338005858	Ø150*H26mm	50 PCS/CTN	765*265*H315 mm
S9913	9360338005889	Ø97*Ø173*H114mm	50 PCS/CTN	735*265*H315 mm



3A

LIGHTING

3A AUSTRALIA LIGHTING PTY LTD

Address: 3/48-50 Fitzpatrick Road, Revesby NSW 2212

Phone: 02 9724 7263

Email: info@3a-lighting.com.au | 3alighting@gmail.com

www.3a-lighting.com.au